

Full-Polarization Observations of OH Masers in Massive Star-Forming Regions: I. Data

Vincent L. Fish¹

National Radio Astronomy Observatory

P. O. Box O, 1003 Lopezville Road, Socorro, NM 87801

`vfish@nrao.edu`

Mark J. Reid and Alice L. Argon

Harvard-Smithsonian Center for Astrophysics

60 Garden Street, Cambridge, MA 02138

`reid@cfa.harvard.edu, aargon@cfa.harvard.edu`

and

Xing-Wu Zheng

Department of Astronomy, Nanjing University

Nanjing 210093 PR China

`xwzheng@nju.edu.cn`

ABSTRACT

We present full-polarization VLBA maps of the ground-state, main-line, $^2\Pi_{3/2}$, $J = 3/2$ OH masers in 18 Galactic massive star-forming regions. This is the first large polarization survey of interstellar hydroxyl masers at VLBI resolution. A total of 184 Zeeman pairs are identified, and the corresponding magnetic field strengths are indicated. We also present spectra of the NH_3 emission or absorption in these star-forming regions. Analysis of these data will be presented in a companion paper.

Subject headings: masers — stars: formation — ISM: magnetic fields — radio lines: ISM

¹Jansky Fellow

1. Introduction

Hydroxyl (OH) masers are an important tool for probing the environment of high-mass star-forming regions (SFRs). They are bright, often greater than 1 Jy, so they can be seen in SFRs that are located across the Galaxy. Due to Zeeman splitting, the magnetic field strength and line-of-sight direction can be inferred *in situ*. The linear polarization direction and fraction provides additional information about the three-dimensional alignment of the magnetic field. The velocity field of many points around the central star can also be probed using the velocity of emission of maser features.

Only one high-mass SFR has been studied in great depth: W3(OH). Images obtained using VLBI techniques conclusively detected the presence of Zeeman pairs of OH maser spots in all four ground-state ($^2\Pi_{3/2}, J = 3/2$) transitions (Lo et al. 1975; Reid et al. 1980; Fouquet & Reid 1982) as well as in the 6035 MHz $^2\Pi_{3/2}, J = 5/2$ transition (Moran et al. 1978). Subsequent imaging uncovered a plethora of Zeeman pairs in the ground-state transitions (García-Barreto et al. 1988; Bloemhof, Reid, & Moran 1992) as well as in the two main-line $^2\Pi_{3/2}, J = 5/2$ transitions (Desmurs et al. 1998) and the 13441 MHz $^2\Pi_{3/2}, J = 7/2$ transition (Baudry & Diamond 1998); additionally, W3(OH) is known to have a Zeeman pair at 13434 MHz (Güsten, Fiebig, & Uchida 1994). More recently, Wright, Gray, & Diamond (2004a,b) have mapped all four ground-state transitions in full polarization.

These observations led to several surprising results. First, maser spots appeared to be clustered on a scale of several times 10^{15} cm (Reid et al. 1980; Wright, Gray, & Diamond 2004a). Second, the magnetic fields implied by Zeeman splitting consistently had the same line-of-sight direction across W3(OH), suggesting an organized magnetic field structure. Third, proper motions obtained over an eight-year time baseline showed that the OH maser spots were moving outward from the central ultracompact (UC) H II region (Bloemhof, Reid, & Moran 1992). Wright, Gray, & Diamond (2004a) conclude from a third epoch of data taken a decade later that the OH motions trace rotation in the north-south direction as well as expansion, a conclusion supported by the distribution of 4765 MHz $^2\Pi_{1/2}, J = 1/2$ masers as well (Harvey-Smith & Cohen 2005). Fourth, most maser spots were

100% polarized, and most of these were nearly totally circularly polarized (García-Barreto et al. 1988). No spots with a linear polarization fraction greater than 45% were detected. Fifth, maser distributions in one transition correlate with those in certain transitions but not with others. For instance, the spatial distributions of 1720 and 4765 MHz masers overlap (Baudry et al. 1988; Gray et al. 2001; Palmer, Goss, & Devine 2003), while the 1665 and 1667 MHz transitions are spatially separated (Norris & Booth 1981).

While OH masers have been observed using VLBI techniques in other massive SFRs (for instance, Zheng, Reid, & Moran 2000; Argon, Reid, & Menten 2002; Slysh et al. 2002), the total number of such sources observed remains only a handful. In order to more rigorously test the universality of the properties discovered in W3(OH), as well as in the hope of uncovering additional interesting phenomena, we have undertaken a survey of 18 sources, including two for which preliminary results were presented by Argon, Reid, & Menten (2002).

2. Observations and Data Reduction

We observed 18 sources in 5 separate epochs with the National Radio Astronomy Observatory’s¹ Very Long Baseline Array (VLBA). Sixteen of the sources were observed at the frequencies of both main-line ${}^2\Pi_{3/2}, J = 3/2$ OH transitions (1665.4018 and 1667.3590 MHz) using 125 kHz bands divided into 128 spectral channels, which corresponds to a velocity width of 0.176 km s^{-1} per channel. W51 and G351.775–0.538 were observed using 250 kHz bands instead, resulting in a velocity width of 0.352 km s^{-1} per channel. Both the parallel and cross-polarization data were correlated in order to produce images in all Stokes parameters. Dates of observations and on-source observing times can be found in Table 1.

Data processing was done using the NRAO Astronomical Image Processing System (AIPS). A full description of the calibration procedure occurs in Appendix A. The source 3C286 was used to

¹The National Radio Astronomy Observatory is a facility of the National Science Foundation operated under cooperative agreement by Associated Universities, Inc.

Table 1. Observed Sources

Source	Alias	RA	Dec	Dist. (kpc)	Epoch ^a	Obs. Time ^b	Distance Reference
G005.886−0.393	...	18 00 30.41	−24 04 00.9	3.8	4	135	1
G009.622+0.195	...	18 06 14.74	−20 31 33.9	5.7	4	135	2
G010.624−0.385	...	18 10 28.68	−19 55 49.7	4.8	4	135	1
G034.257+0.154	...	18 53 18.67	+01 14 58.5	3.8	3	450	3
G035.577−0.029	...	18 56 22.50	+02 20 27.1	10.5	4	150	1
G040.622−0.137	...	19 06 01.61	+06 46 35.8	2.2	4	150	4
G043.796−0.127	...	19 11 54.01	+09 35 50.0	9.0	4	135	5
G049.488−0.387	W51 M/S	19 23 43.93	+14 30 31.5	7.0	1	500	6
G069.540−0.976	ON 1	20 10 09.05	+31 31 35.2	3.0	2	220	7
G070.293+1.601	K3−50	20 01 45.73	+33 32 45.3	8.7	2	220	8
G075.782+0.343	ON 2 N	20 21 43.97	+37 26 38.1	5.6	2	220	9
G081.721+0.571	W75 S	20 39 00.96	+42 22 48.1	2.0	2	220	10
G081.871+0.781	W75 N	20 38 36.39	+42 37 34.3	2.0	2	220	10
G109.871+2.114	Cep A	22 56 17.87	+62 01 48.6	0.7	3	240	11
G111.543+0.777	NGC 7538	23 13 45.34	+61 28 10.1	2.8	3	240	12
G196.454−1.677	S269	06 14 37.07	+13 49 36.3	3.8	5	180	13
G213.706−12.60	Mon R2	06 07 47.84	−06 22 56.7	0.9	5	180	9
G351.775−0.538	...	17 26 42.70	−36 09 17.4	2.2	1	255	14

Note. — Units of right ascension are hours, minutes, and seconds, and units of declination are degrees, arcminutes, and arcseconds. All coordinates are J2000.

^aEpochs of observation: (1) 1996 March 01-02, (2) 2000 November 22 and 2001 January 06, (3) 2001 February 16-17, (4) 2001 May 26 and 2001 May 28, (5) 2002 February 06.

^bApproximate amount of total on-source observing time, in minutes.

References. — (1) Fish et al. 2003; (2) Hofner et al. 1994; (3) Reifenstein et al. 1970; (4) Hughes & MacLeod 1993; (5) Watson et al. 2003; (6) Genzel et al. 1981; (7) Araya et al. 2002; (8) Harris 1975; (9) Wink, Altenhoff, & Mezger 1982; (10) Dickel, Dickel, & Wilson 1978; (11) Blaauw, Hiltner, & Johnson 1959; (12) Crampton, Georgelin, & Georgelin 1978; (13) Moffat, Fitzgerald, & Jackson 1979; (14) Caswell 1997

calibrate polarization position angles. For each source, an iterative self-calibration was performed. A single maser spot in a single maser transition and polarization was selected based on overall intensity on all baselines, and the resulting self-calibration was applied to both transitions and polarizations of the source. In sources for which interstellar scatter broadening is large, extended baselines were discarded. Since interstellar scattering enlarges the observed angular size of objects, the visibilities on long baselines (corresponding to small angular scales) are nearly zero. These baselines are therefore not useful, since their visibilities simply add noise to the images. Due to the distribution of VLBA antennas, this is effectively equivalent to discarding all data from the Mauna Kea and St. Croix antennas for moderate scatter broadening (e.g., in G40.622–0.137); for large scatter broadening (e.g., in K3–50), the Hancock, North Liberty, and Brewster data were discarded as well. The resulting synthesized beam size for each source is listed in Tables 2 to 20.

Imaging was performed using the AIPS task **IMAGR**. First, low-resolution Stokes I map cubes were made in both transitions encompassing an area greater than that of known OH maser emission (Argon, Reid, & Menten 2000). Then, all fields in this map that contained OH maser emission in one or more velocity planes were imaged with a cellsize approximately one-fifth the synthesized beam size. Maser spots were identified in each velocity plane of these cubes. Gaussians were fit to the maser spots using a modified version of the AIPS task **JMFIT**.

Maser lines were identified when maser emission was seen in essentially the same location in two or more consecutive velocity planes. Zeeman pairing of maser lines in LCP and RCP was done in a similar fashion to the method used in Fish et al. (2002), but the milliarcsecond resolution afforded by the VLBA permits unambiguous identification of components of a Zeeman pair in the vast majority of cases. When an LCP line and an RCP line at a different velocity were found in the same region of space typically to within 10^{15} cm, they were identified as a Zeeman pair. This separation was chosen based on the empirical results of previous observations of W3(OH) (Reid et al. 1980).

Additionally, we observed the $(J, K) = (1, 1)$ line of ammonia (rest frequency 23694.495 MHz) with the VLA. Observations of G5.886–0.393, G9.622+0.195, and G351.775–0.538 were taken on

2001 September 27 with the VLA in DnC configuration, while the rest of our sources were observed on 2002 January 6 in the D configuration. On-source observation times were about 35 minutes for the first set of sources and 20 minutes for the second set. Data reduction was carried out using AIPS. Gaussians were fitted to the spectra where absorption or emission was detected.

3. Images and Tables

The maser spots are shown superposed on continuum images in Figures 1 to 39. Most of these are X-band continuum images taken from the VLA survey (Argon, Reid, & Menten 2000), although U-band continuum images are substituted when they are of higher quality. There is a registration uncertainty between the maser spots and continuum maps. We have attempted to use the same registrations as in the survey, but this is not always possible for two reasons. First, OH masers are variable, so some maser spots have disappeared or appeared in the years between the survey paper and the VLBA observations described in this paper. Second, the beamsize for the VLA OH observations was greater than $1''$. The VLA maps suffer from blending of maser spots along with the concomitant positional smearing. The positional uncertainties of weak, isolated maser spots in the VLA survey are also large. Unlike in the VLA survey, however, there should be essentially no relative registration error (< 1 mas) between the 1665 and 1667 MHz spots. Both transitions were observed simultaneously, and the self-calibration from one transition was applied to the other. The maser spot used for self-calibration of each source is located at the origin.

Maser spots are indicated by stars and squares for 1665 and 1667 MHz emission, respectively in Figures 1 to 38. Emission in RCP is represented by open symbols and LCP by filled symbols. Locations with identified Zeeman pairs are indicated by arrows, and the numbers indicate magnetic fields in milligauss. Positive field strengths denote fields for which the line-of-sight component is directed away from the Sun ($v_{RCP} > v_{LCP}$), while negative field strengths denote fields oriented toward the Sun. The velocity of each maser spot is indicated in color, with a velocity key appearing below each map. The velocities are not corrected to remove the Zeeman effect. That is, a Zeeman pair consisting of two σ -components at the same location would be indicated by an open and filled

spot at different velocities, even though the true velocity of the material would be at the average of the two velocities. While the velocity of the material is more physically significant than the uncorrected velocities of the maser spots, Zeeman velocity shifts have not been removed because it is not possible to do so consistently for all maser spots in a source. Magnetic field strengths (and directions) vary across sources, and in most sources the majority of maser spots cannot be identified as components of a Zeeman pair (or triplet).

Maser line parameters are also listed in Tables 2 to 20. For each maser line, the position, velocity and velocity FWHM, flux density, linear polarization parameters, spot fit parameters, and minimum peak brightness temperature are given. Flux densities are given for RCP (Stokes RR), LCP (LL), and linear ($\sqrt{Q^2 + U^2}$) polarizations. Positions and fit parameters for maser lines seen in linear polarization are based on a flux-weighted average of Stokes Q and U. When the same maser line is seen in more than one polarization, as is the case for spots with a high degree of linear polarization or a substantial unpolarized component, all relevant parameters except the linear polarization fraction and position angle are given for each polarization, and the entries are grouped together on adjacent lines without additional interline spacing. Thus, any maser line is represented by one to three lines of the table, depending on its polarization characteristics. The listed linear polarization parameters are based on brightnesses in the peak channel of brightest circular polarization. Since polarization properties may change across a spot size, the listed linear polarization fraction may not always be identical to that which would be computed from the listed flux densities.

Since only two adjacent detectable channels of emission were required for the identification of maser spots, it is not always possible to fit for the velocity center and FWHM. When such fits are impossible, the velocity listed is the center velocity of the channel of peak emission, and no FWHM is given. The listed velocity may be offset from the actual line velocity by up to half of the 0.176 km s^{-1} velocity channel width, although in most cases the velocity error should be significantly less.

Generally the detectability limit for maser spots in a single channel of the Stokes Q and U

maps was 30-40 mJy/beam. When no emission was detected in either Stokes Q or U, the linear polarization fraction is listed as zero. This is provided in preference to an upper limit of linear polarization in order to leave the tables less cluttered and more easily readable. Frequently a maser spot was seen in either Stokes Q or U, but not both. This corresponds to electric-vector polarization position angles (PPAs) of 0, 45, 90, or 135°. In each case, the undetected Stokes parameter was assumed to be identically zero, but could actually be nonzero within the previously quoted noise limits. In almost no cases would this lead to an error of more than a few degrees in the quoted PPA.

3.1. Polarization Maps

Polarization maps of all the sources are shown in Figures 2 to 39. Each maser spot is marked as a circle, and the electric polarization vector is indicated with a line. A line indicating 100% fractional linear polarization is shown below each map. The ratio of the length of the vector drawn through a maser spot and the length of the vector shown in the key is the fractional linear polarization for each spot.

3.2. Zeeman Pairs

Zeeman pairs were identified where an LCP and an RCP line are coincident to within 10^{15} cm (67 AU). These pairs are listed in Table 21. Zeeman pairs with larger separations were also identified when unambiguous. For instance, the separation between the components of the first listed pair for G351.775–0.538 is over 200 AU, but the lack of any other nearby maser spots leads us to identify these spots as a Zeeman pair. We do not attempt to identify Zeeman pairs when the implied magnetic field would be less than 0.5 mG.

3.3. Ammonia Spectra

Spectra of ammonia emission or absorption are shown in Figures 40 to 42. A vertical line running the entire height of the box represents the velocity of the main hyperfine transition. No such line is drawn in cases where no clear absorption or emission is seen or in cases where it is unclear which line is the main hyperfine line. The velocities of the OH masers are shown as shorter vertical lines at the bottom of each panel. Analysis of the implications of the relation of OH maser velocities to ammonia velocities will be provided in a companion paper.

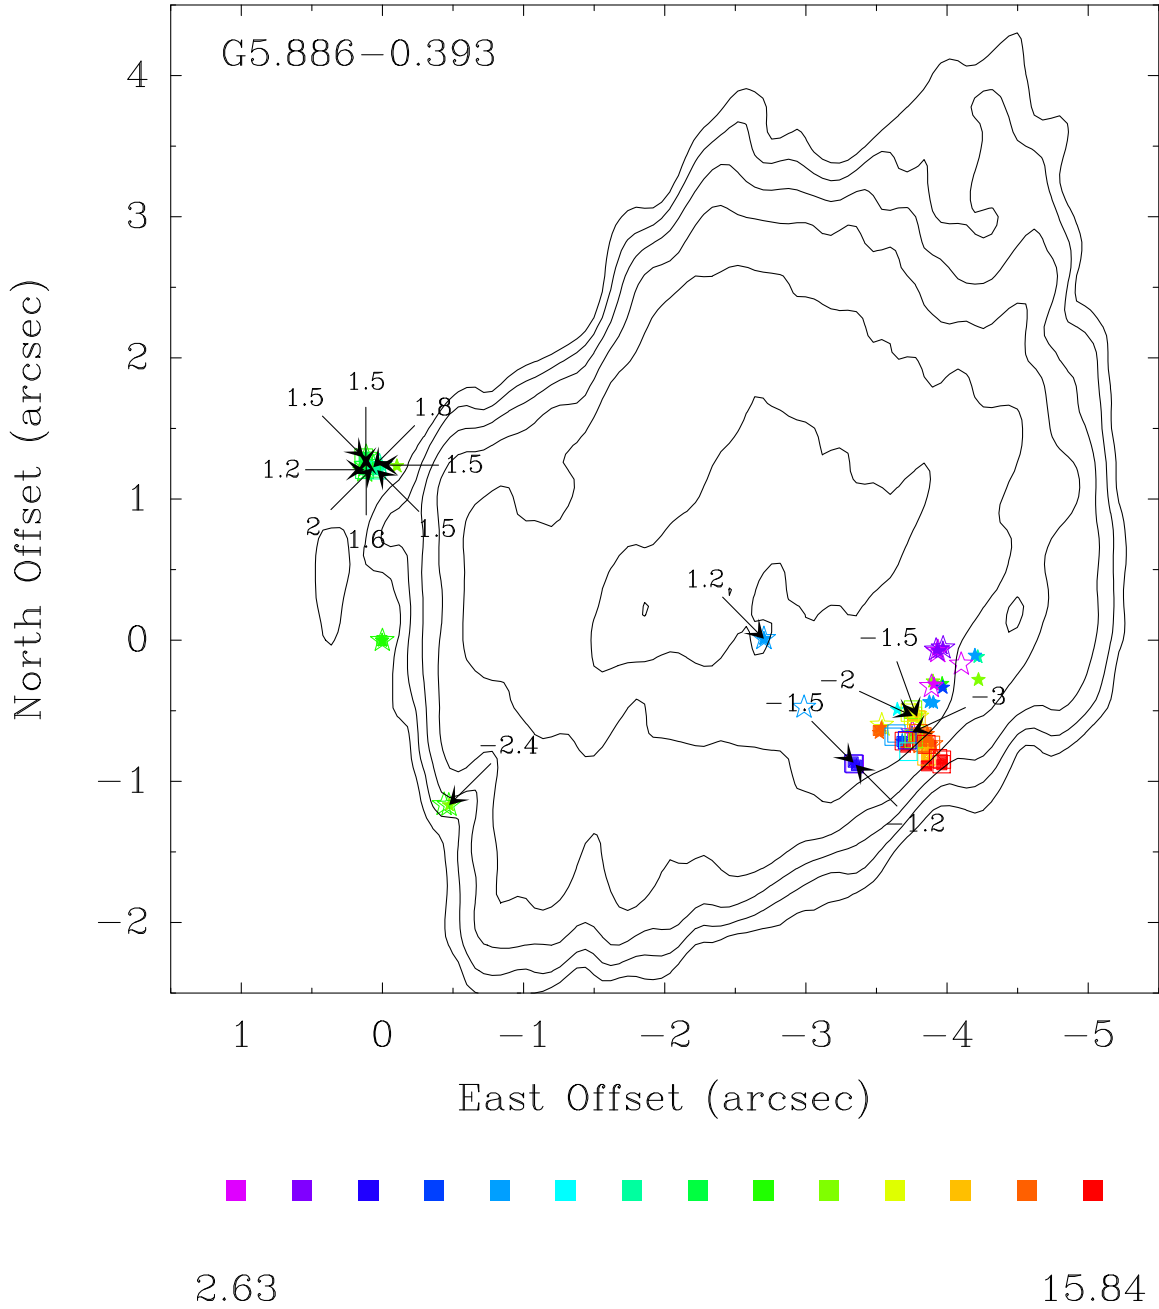


Fig. 1.— Plot of maser spots in G5.886-0.393. Stars (squares) represent 1665 (1667) MHz OH masers; open (filled) represents RCP (LCP) spots. Numbers indicate magnetic fields in milligauss, with a positive sign indicating that the line-of-sight field direction is oriented away from the Sun. The masers are superposed on an X-band continuum map. Contours start at four times the rms noise and increase by factors of two. The color scale indicates LSR maser velocities in km s⁻¹.

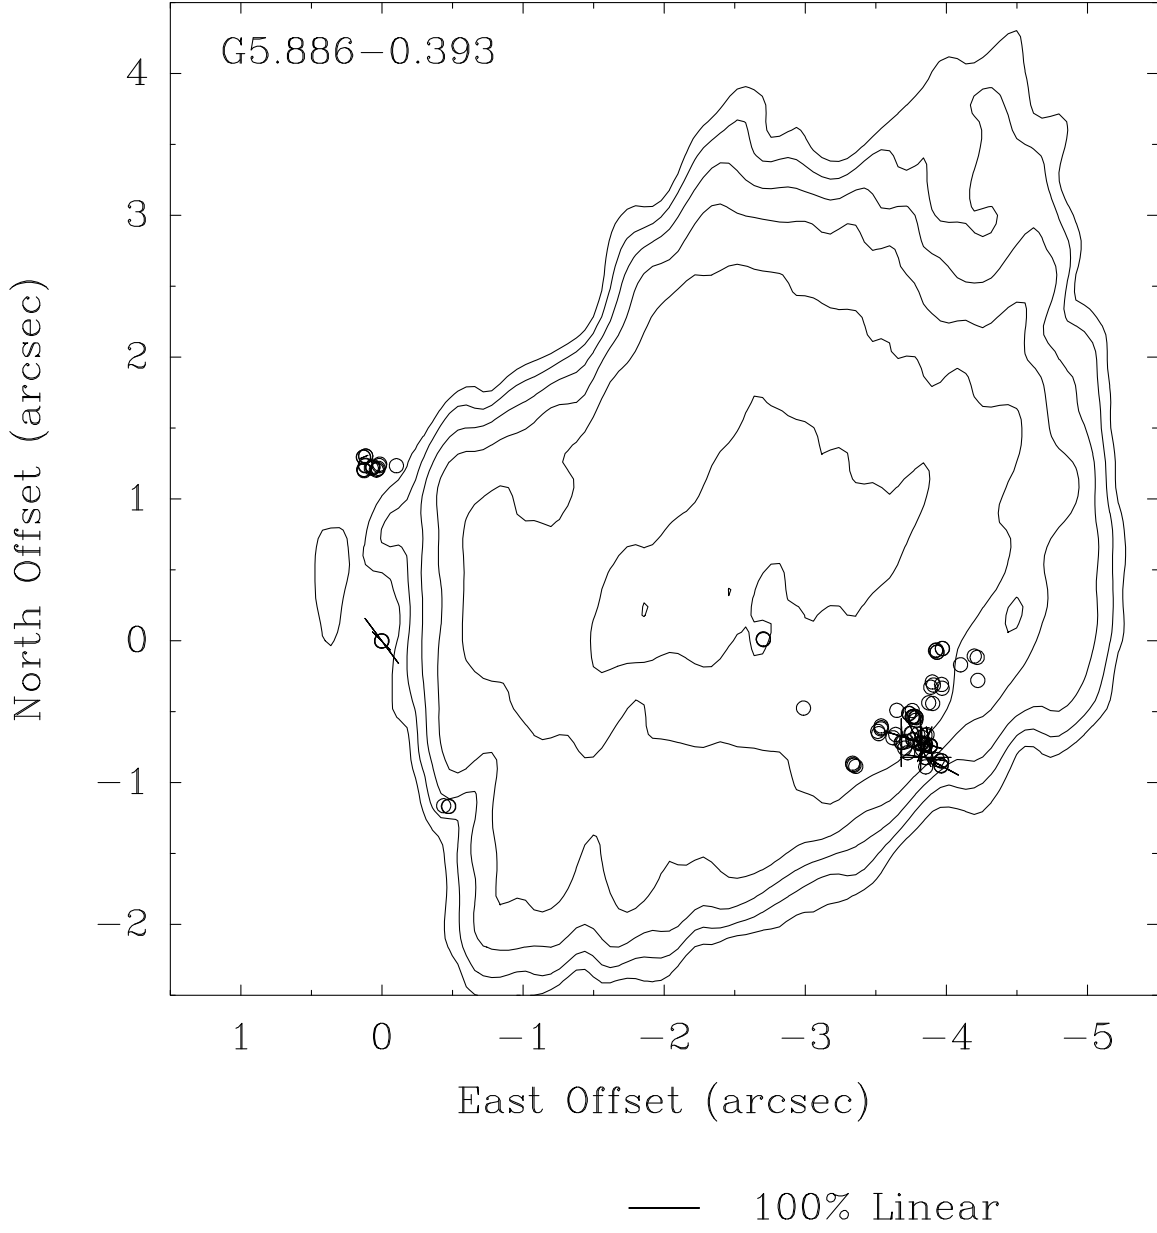


Fig. 2.— Polarization map of G5.886–0.393. Maser spots are represented as circles. Lines running through the centers of the circles indicate the linear polarization fraction and direction. A bar below the box indicates the length of the polarization vector that would be drawn for a spot that is totally linearly polarized. The X-band continuum map is shown for reference.

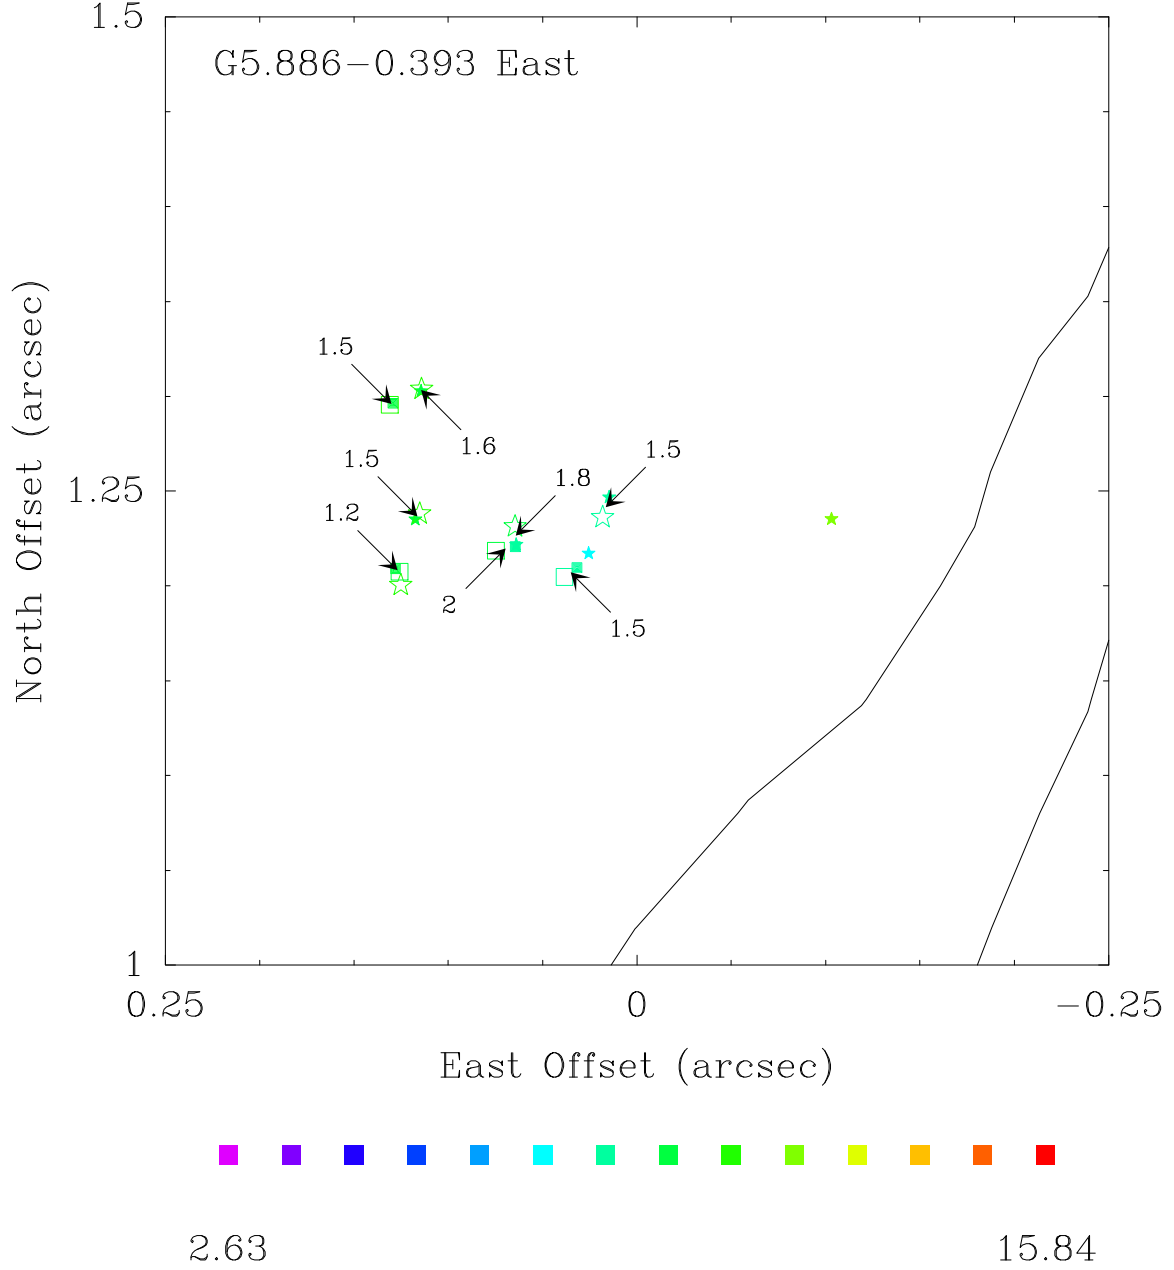


Fig. 3.— Enlargement of plot of maser spots in the eastern cluster of G5.886–0.393. Symbols are as in Figure 1.

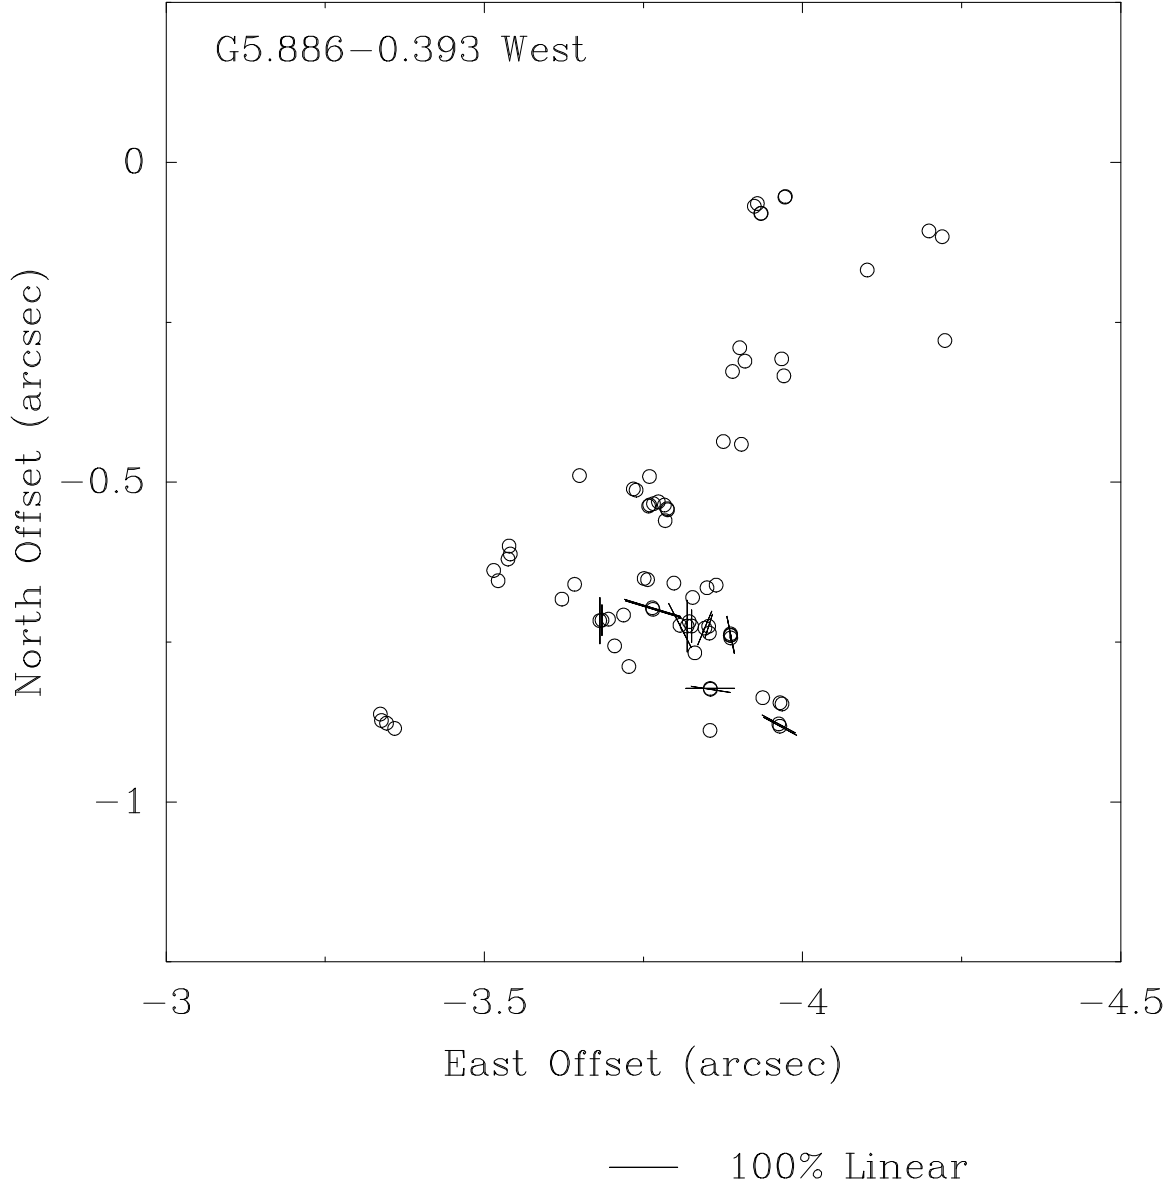


Fig. 4.— Enlargement of polarization map of the western cluster of G5.886-0.393. The continuum image is suppressed for clarity. Symbols are as in Figure 2.

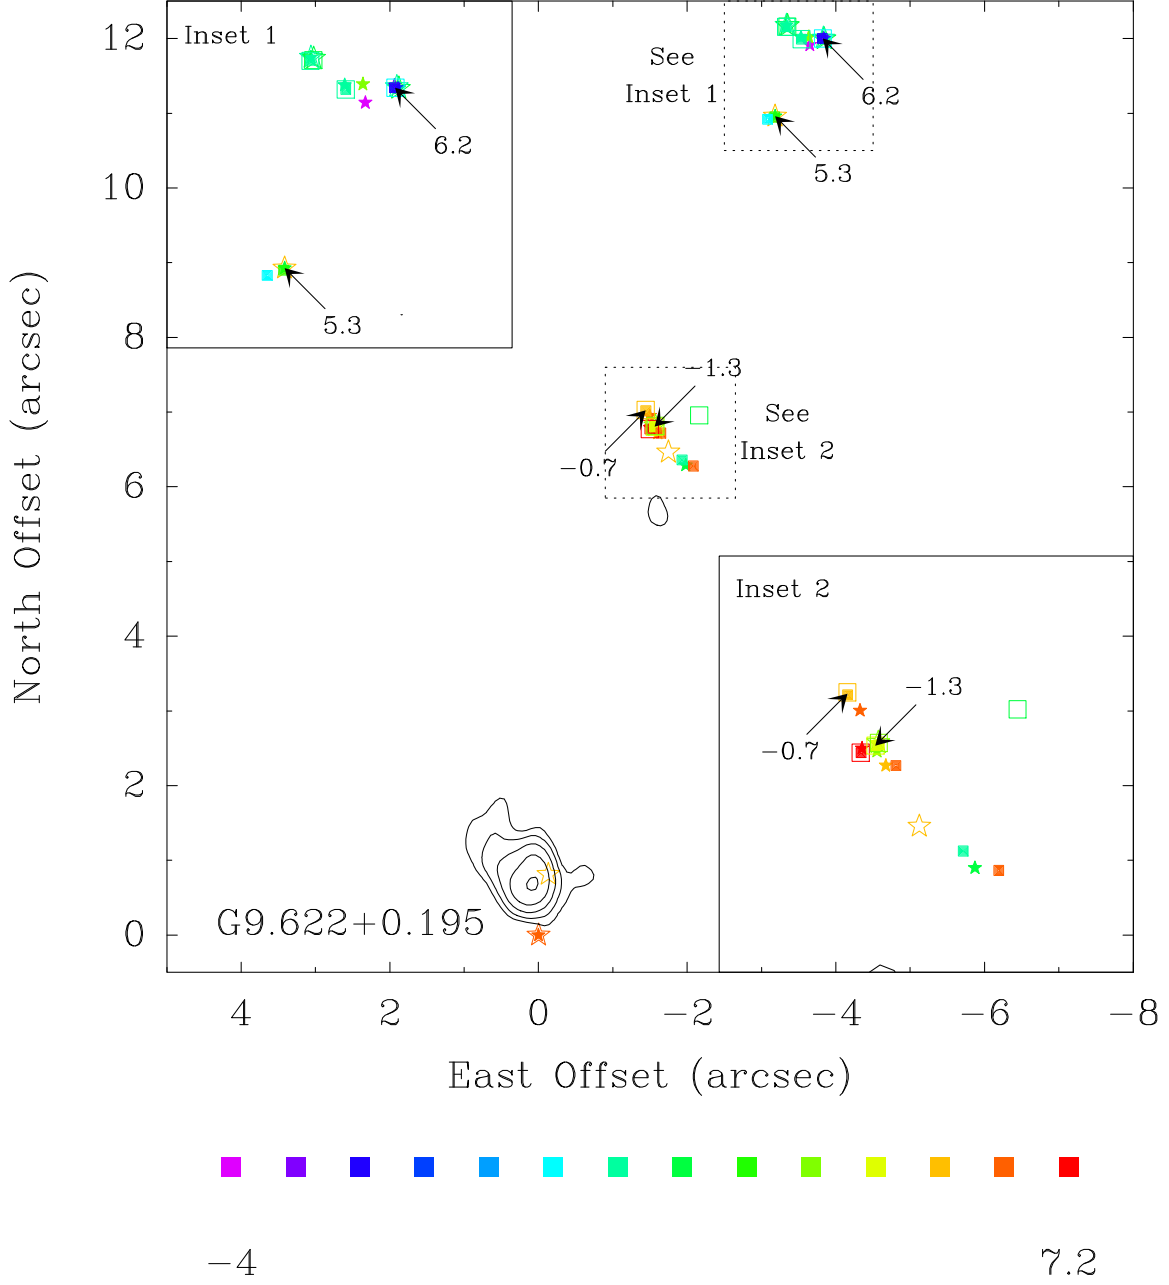


Fig. 5.— Plot of maser spots in G9.622+0.195. Symbols are as in Figure 1.

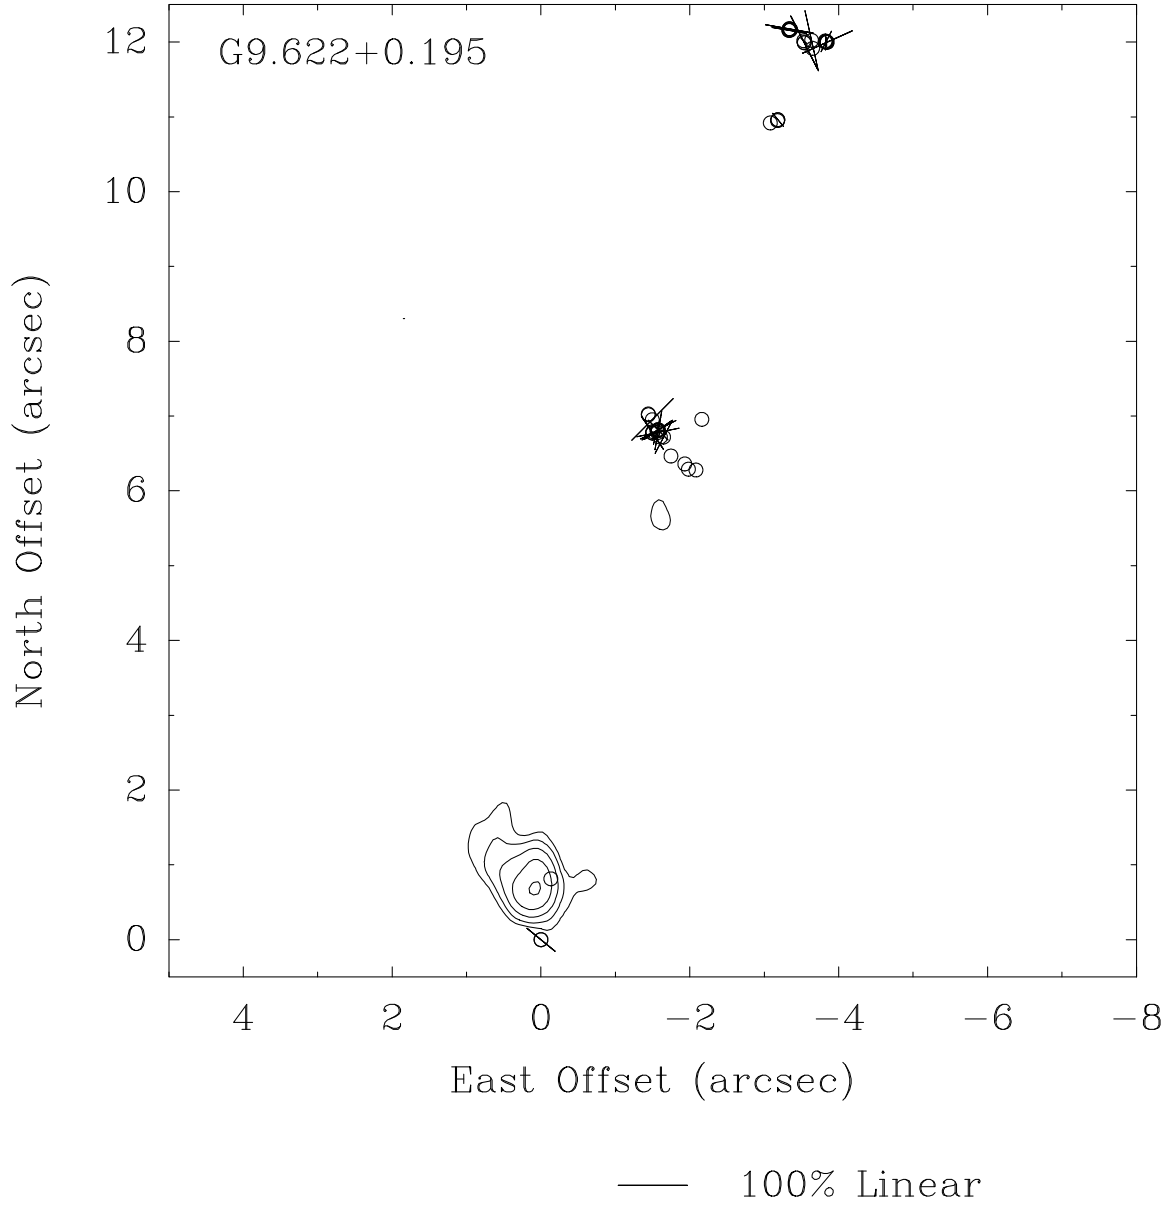


Fig. 6.— Polarization map of G9.622+0.195. Symbols are as in Figure 2.

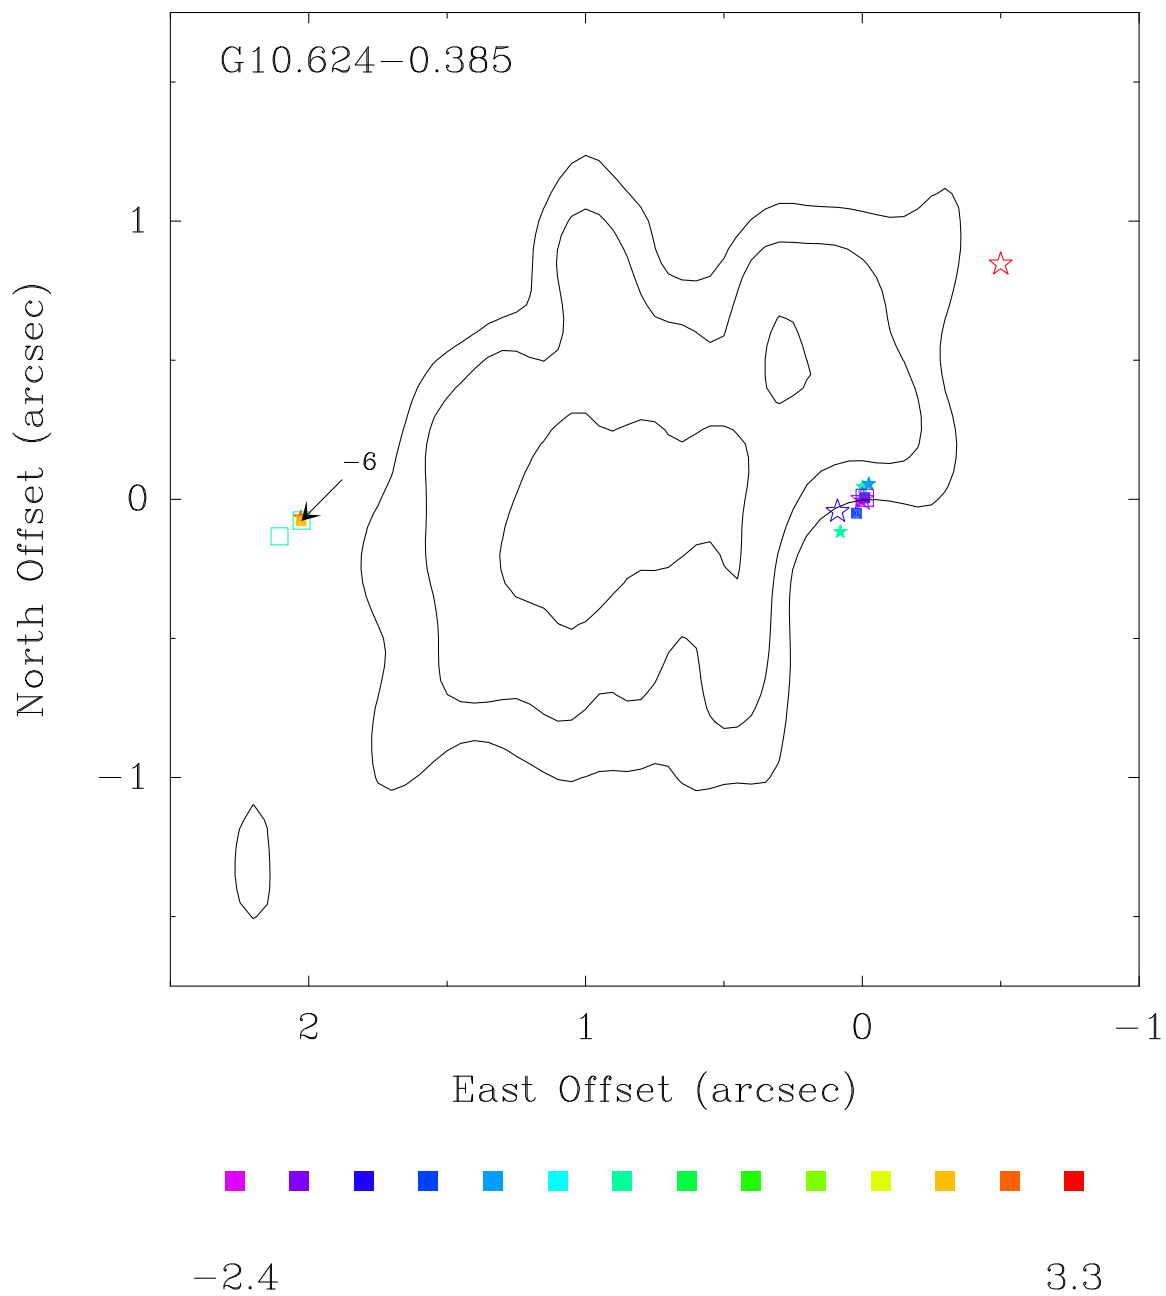


Fig. 7.— Plot of maser spots in G10.624-0.385. Symbols are as in Figure 1.

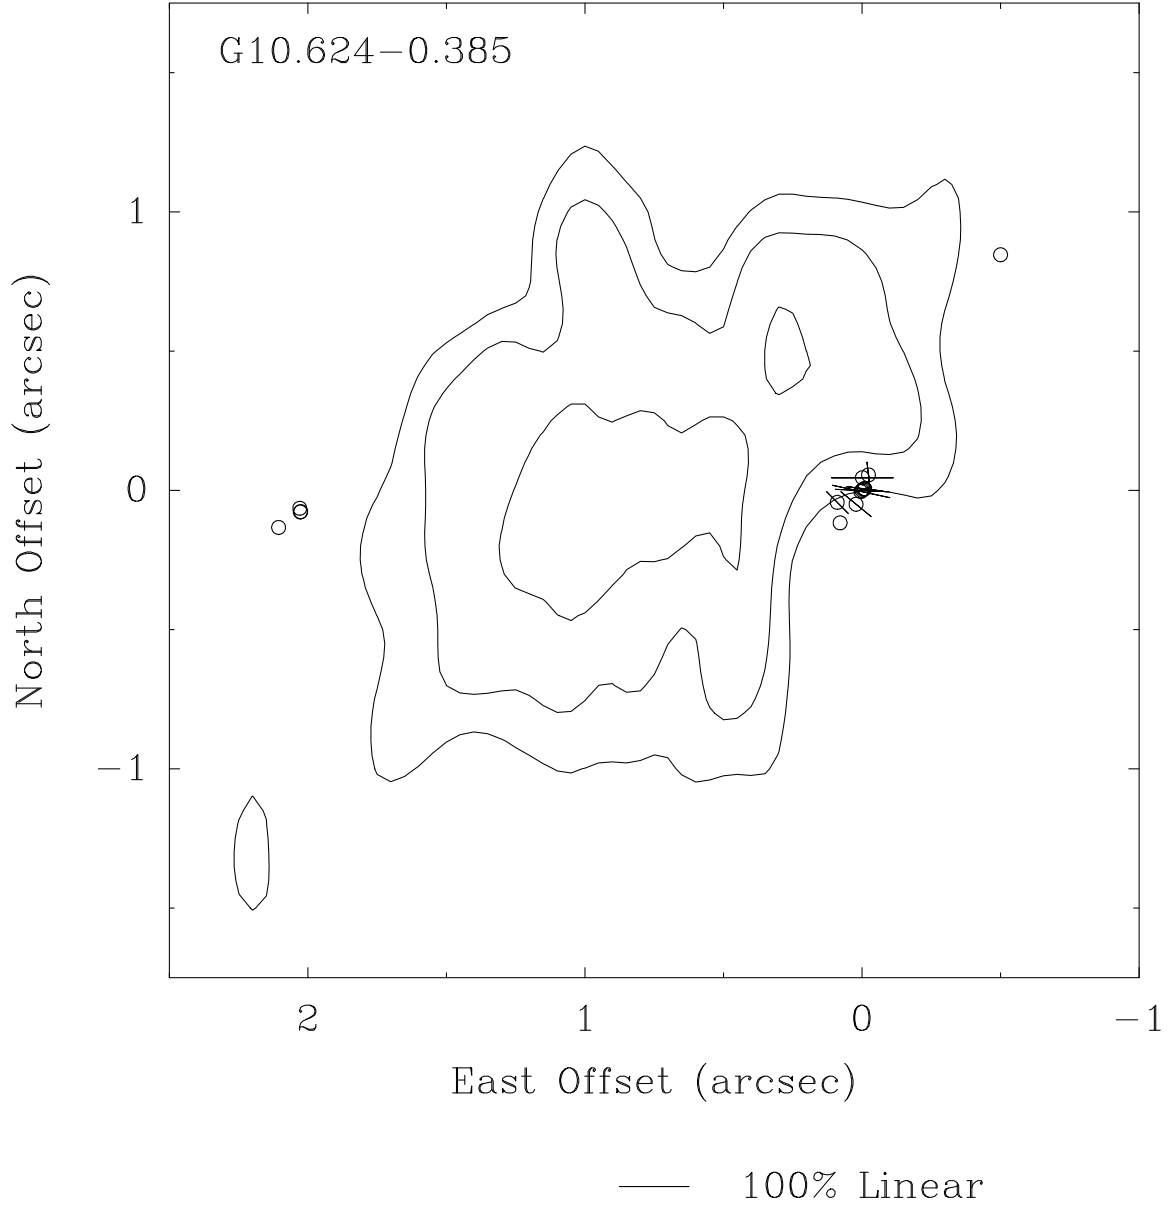


Fig. 8.— Polarization map of G10.624-0.385. Symbols are as in Figure 2.

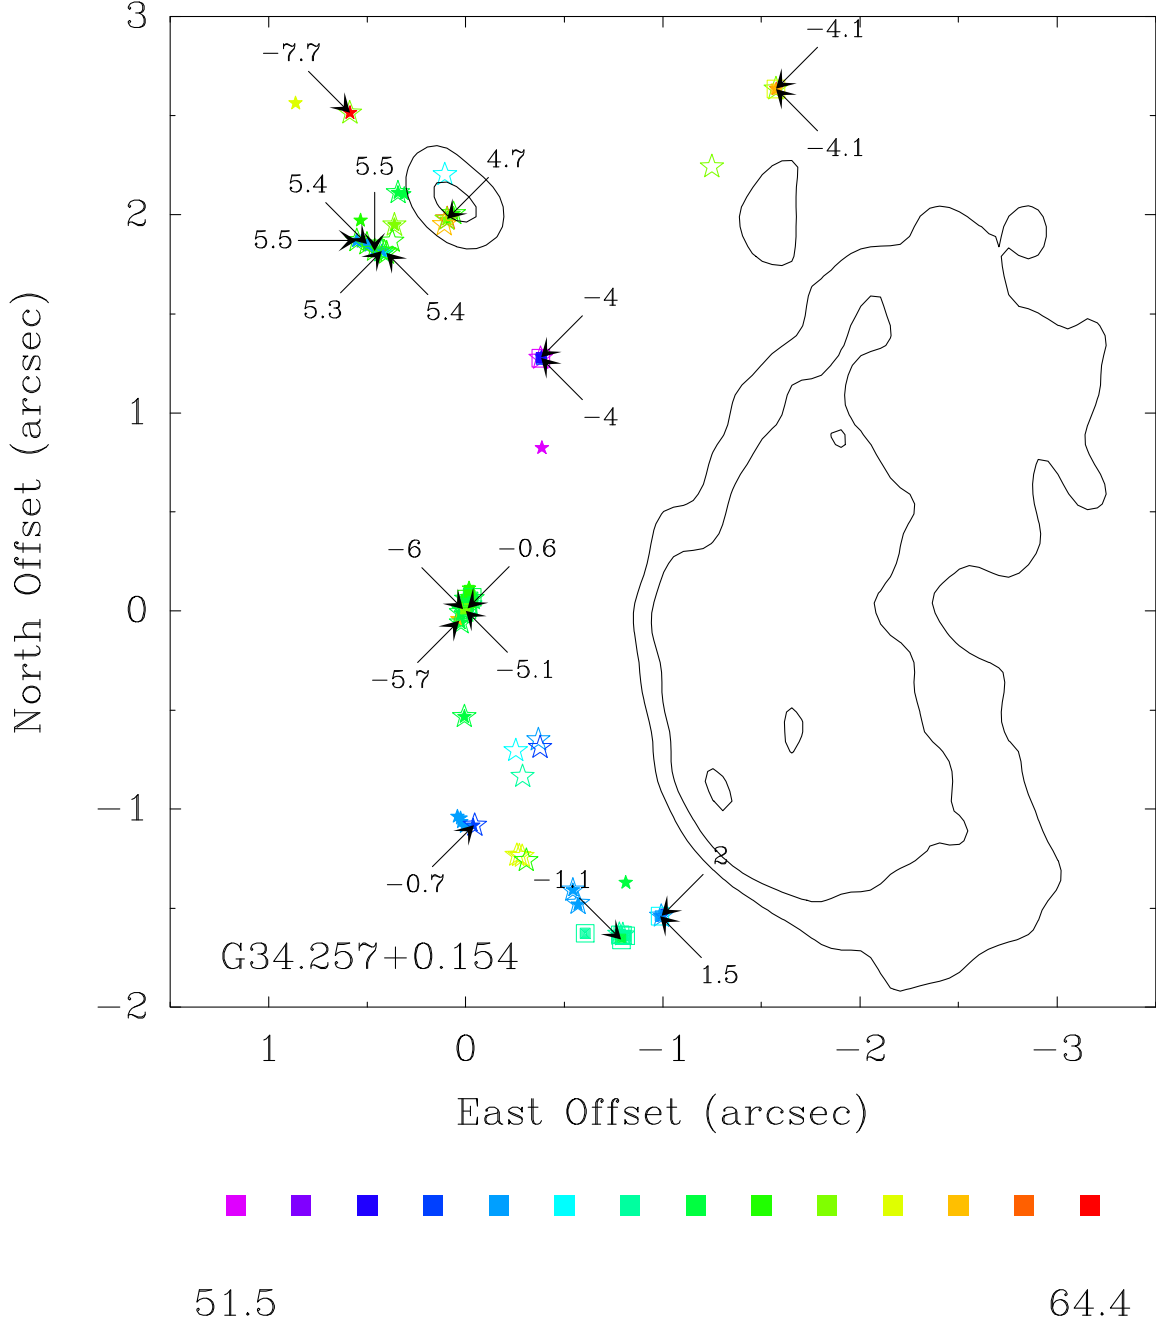


Fig. 9.— Plot of maser spots in G34.257+0.154. Symbols are as in Figure 1.

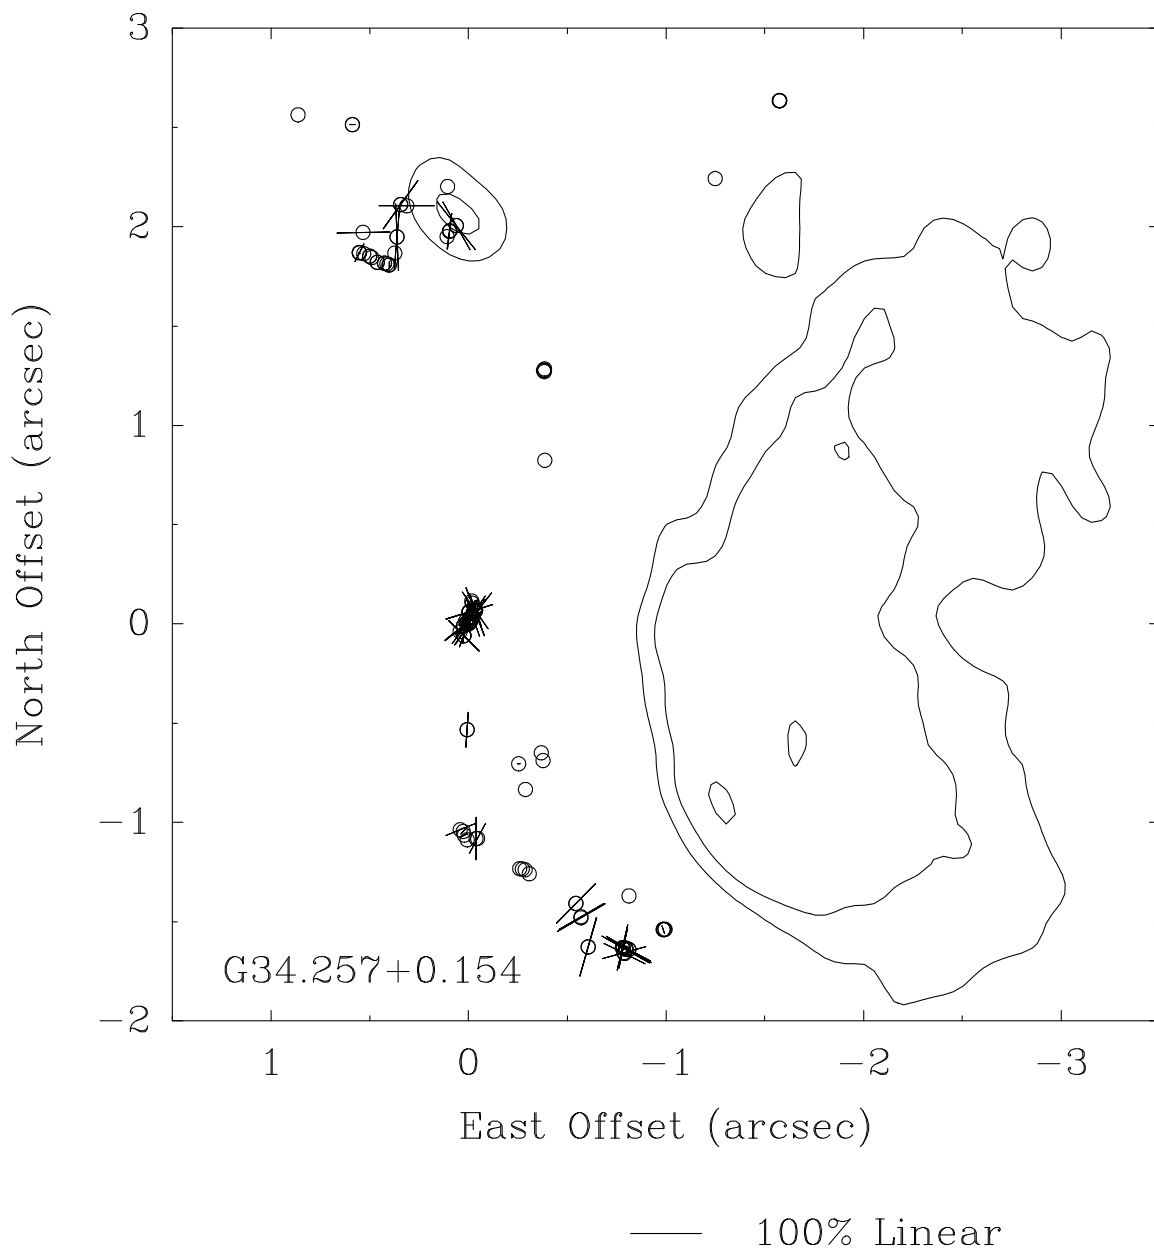


Fig. 10.— Polarization map of G34.257+0.154. Symbols are as in Figure 2.

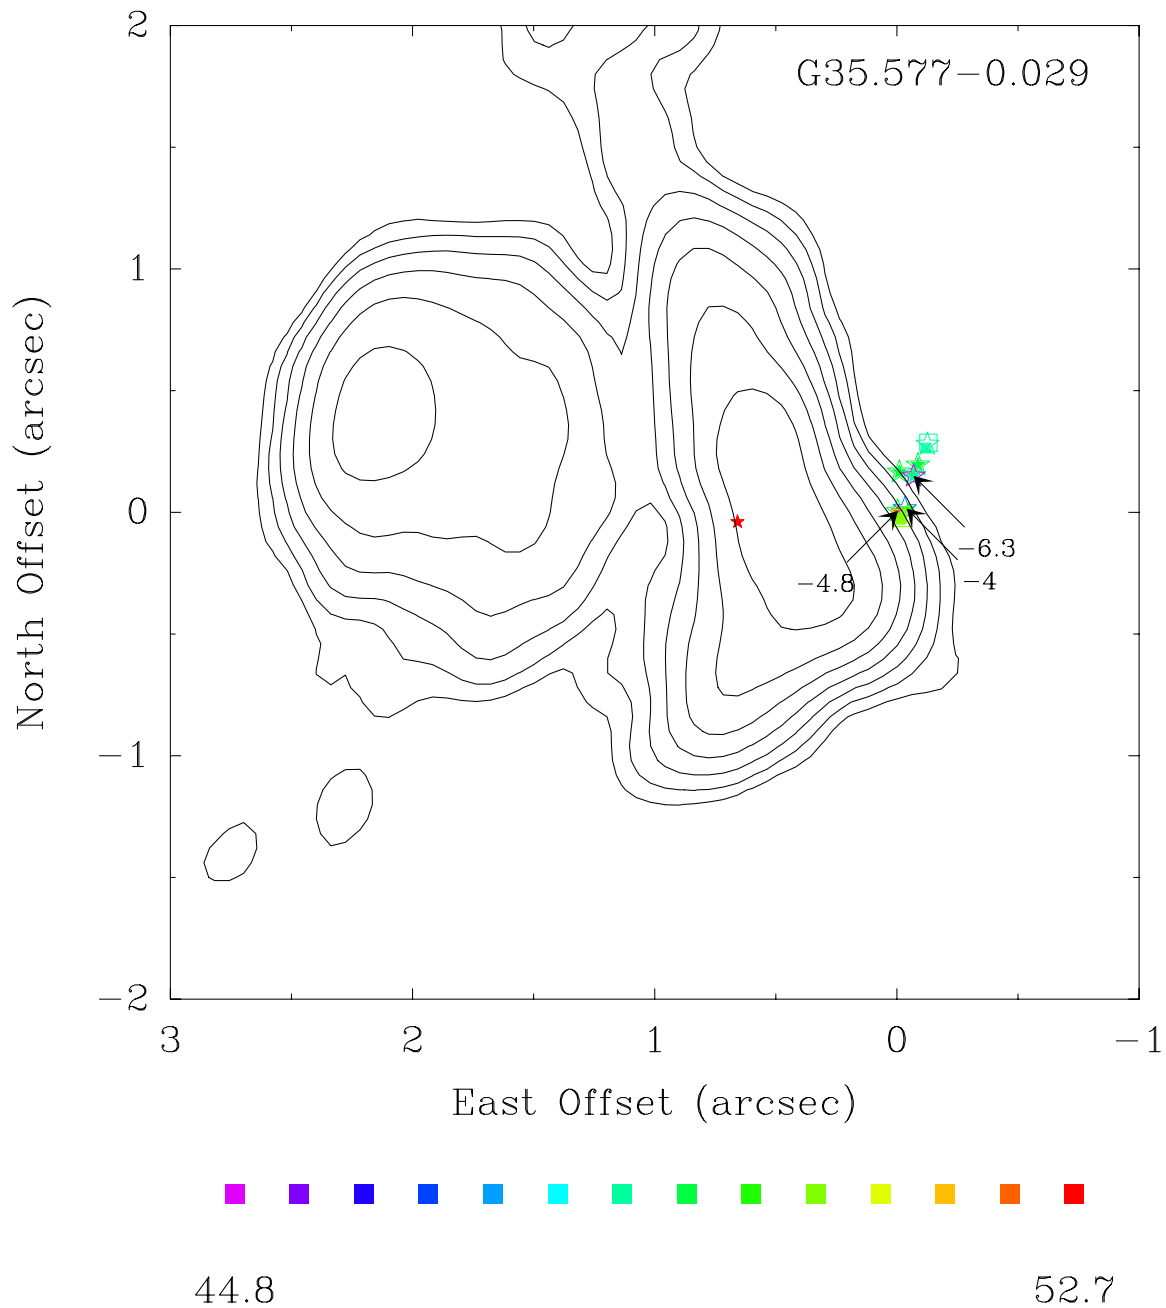


Fig. 11.— Plot of maser spots in G35.577-0.029. Symbols are as in Figure 1.

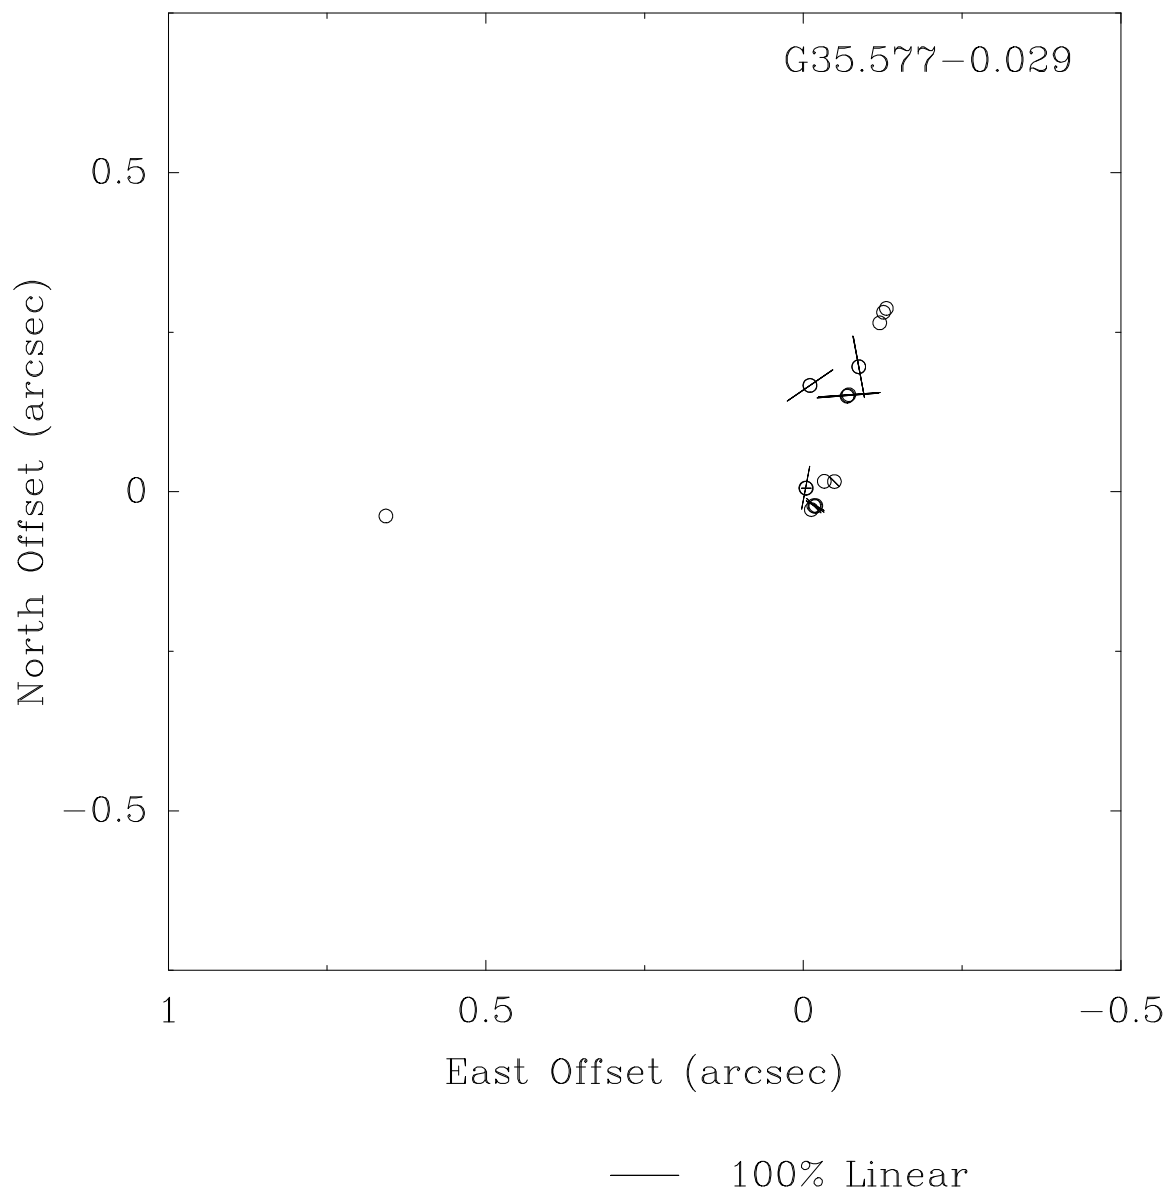


Fig. 12.— Polarization map of G35.577-0.029. Symbols are as in Figure 2. The continuum image is suppressed for clarity.

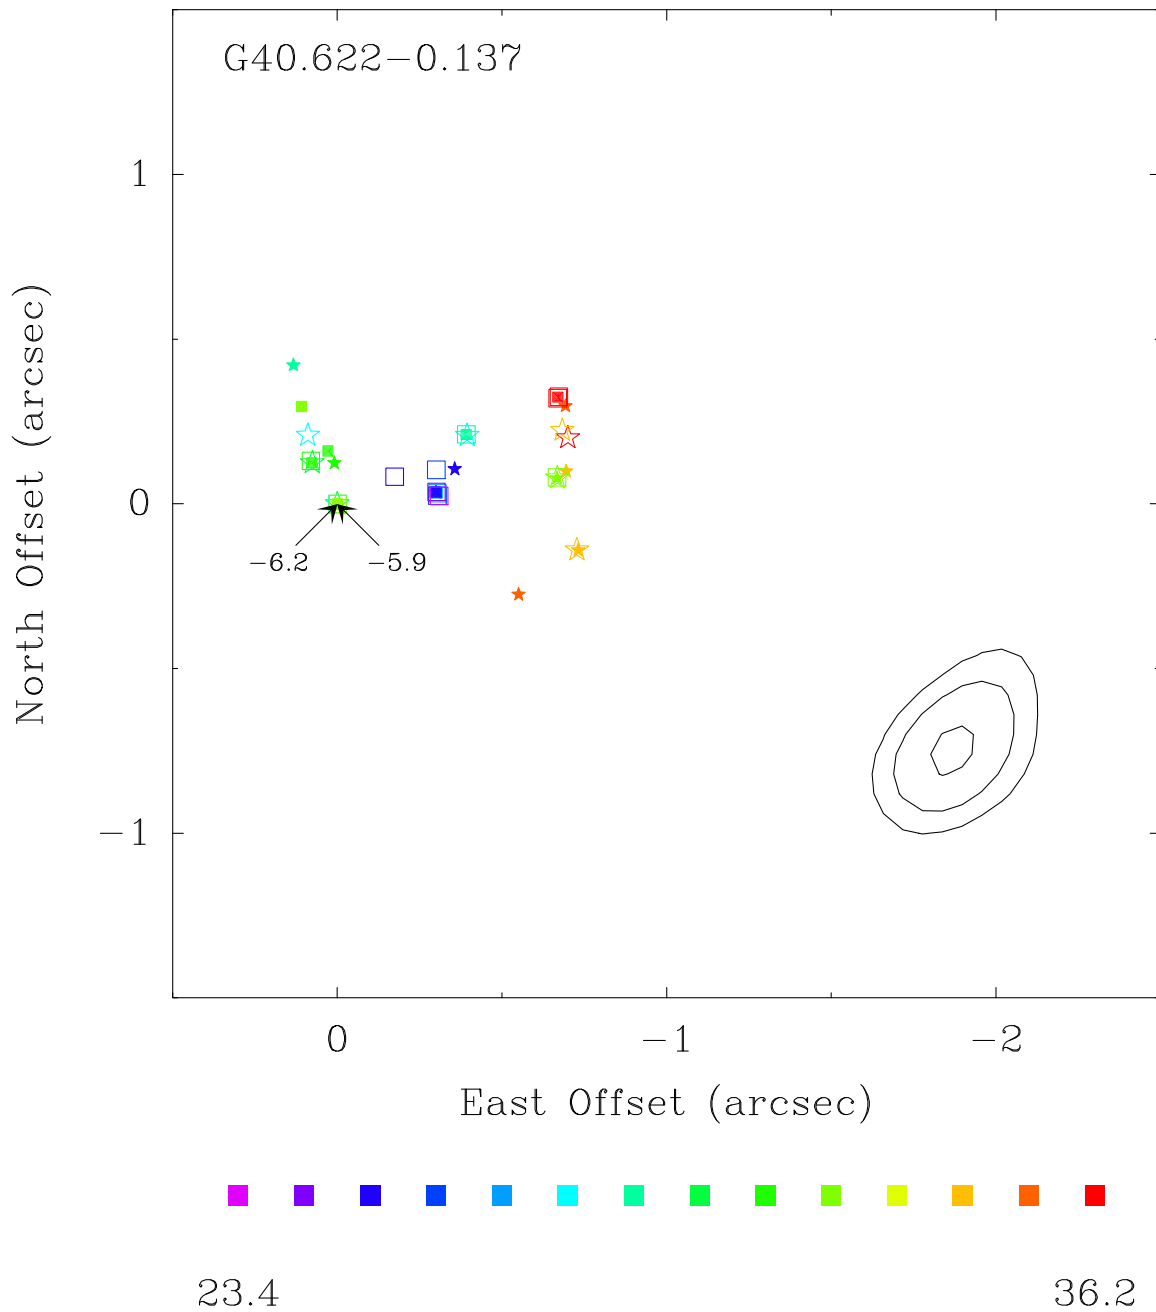


Fig. 13.— Plot of maser spots in G40.622-0.137. Symbols are as in Figure 1.

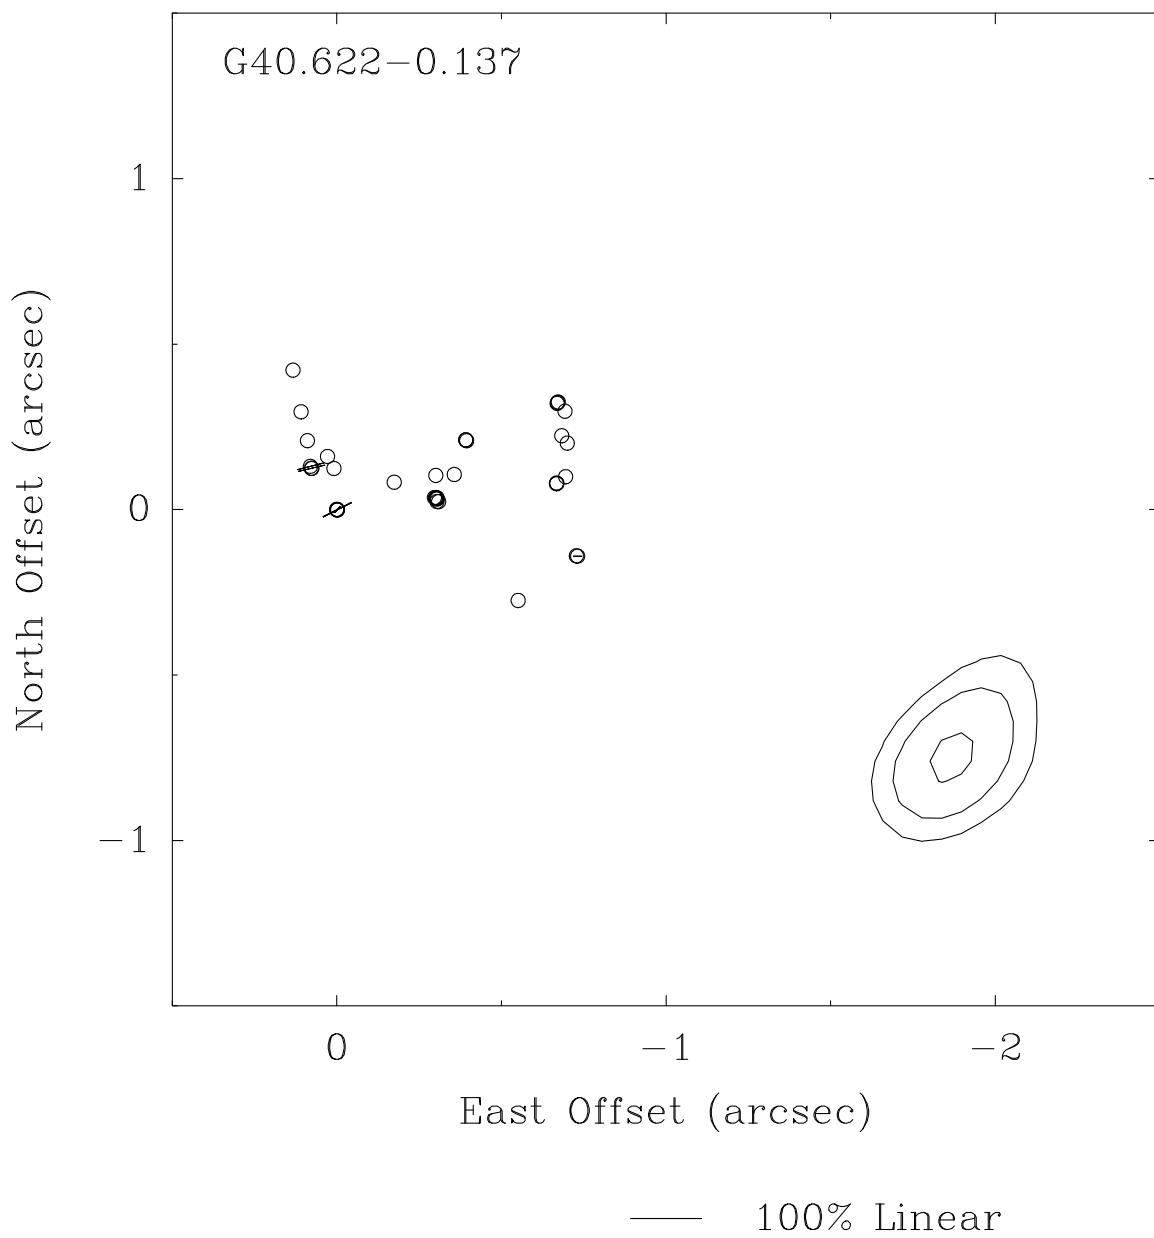


Fig. 14.— Polarization map of G40.622-0.137. Symbols are as in Figure 2.

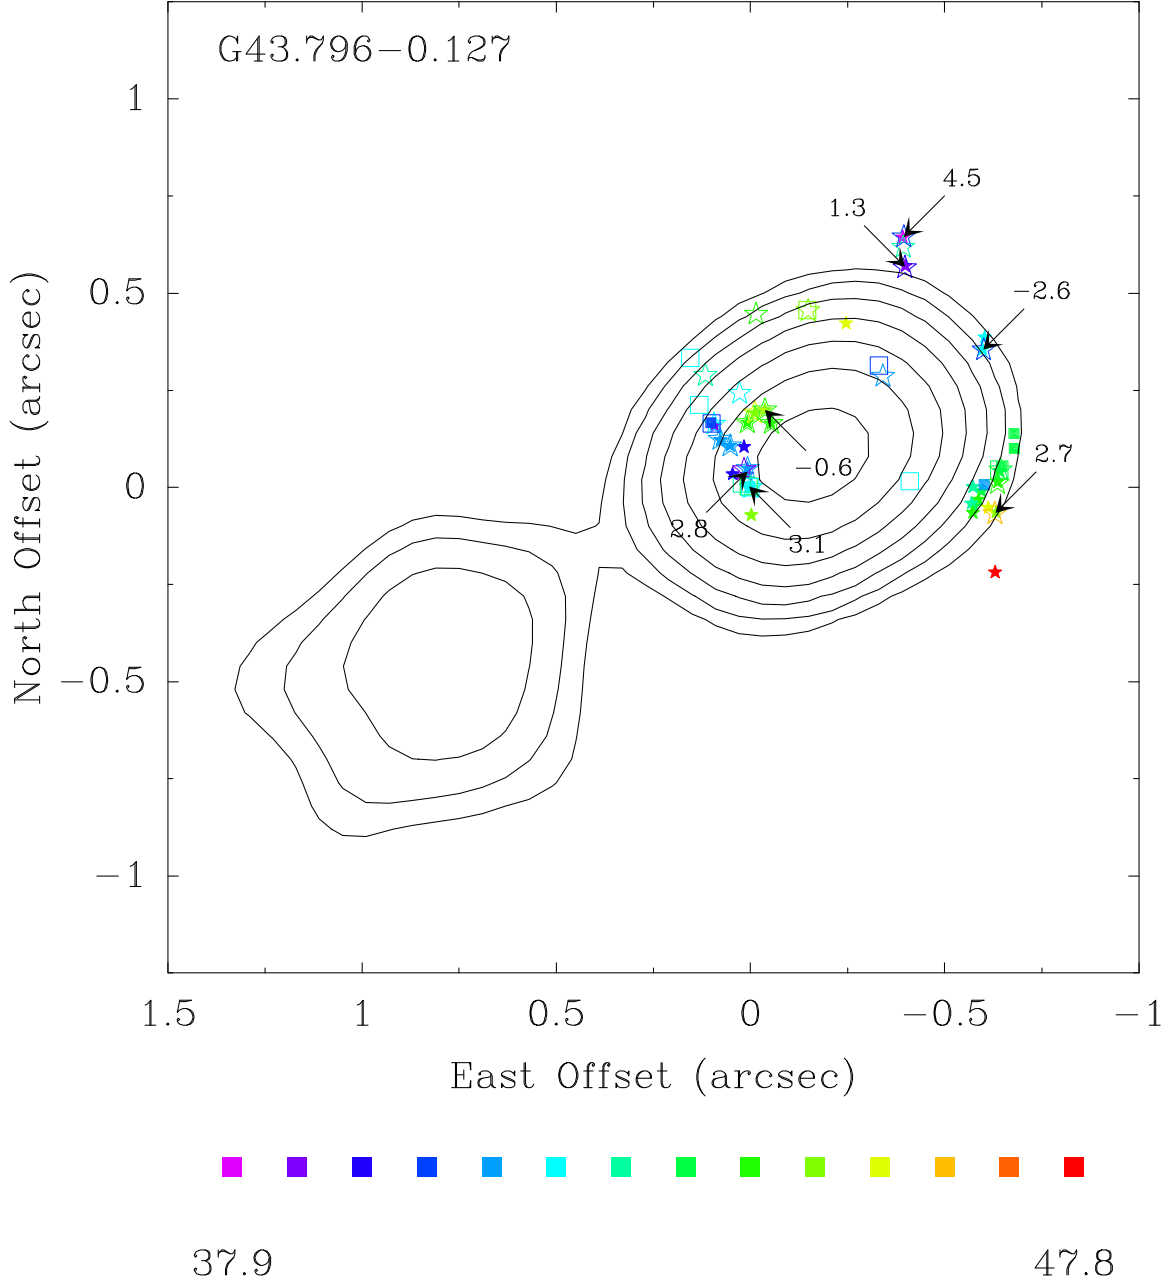


Fig. 15.— Plot of maser spots in G43.796-0.127. Symbols are as in Figure 1.

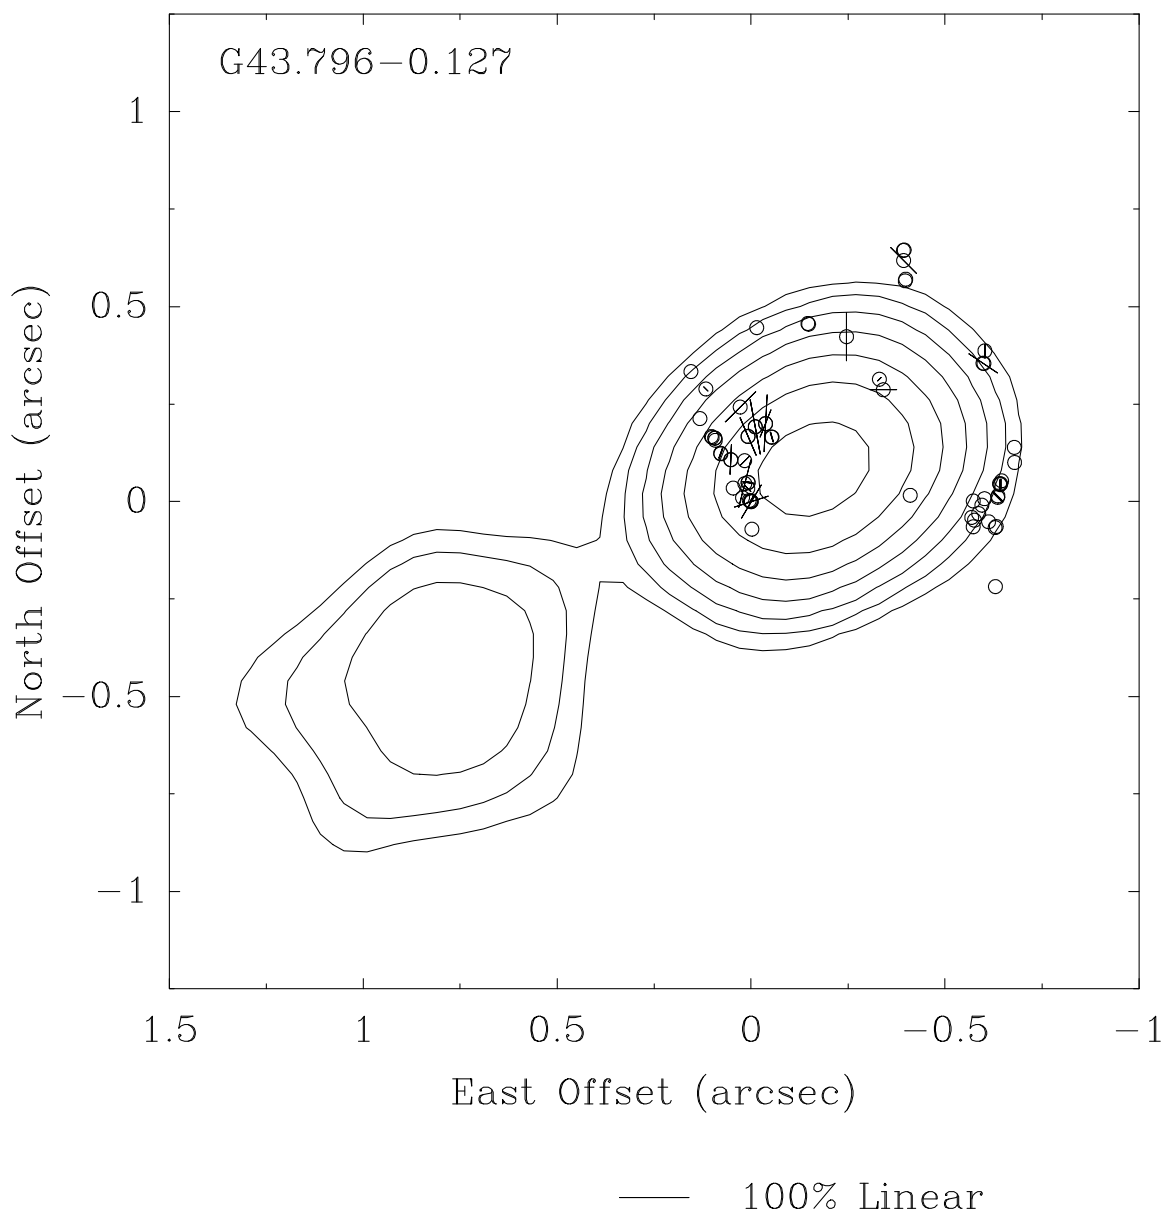


Fig. 16.— Polarization map of G43.796-0.127. Symbols are as in Figure 2.

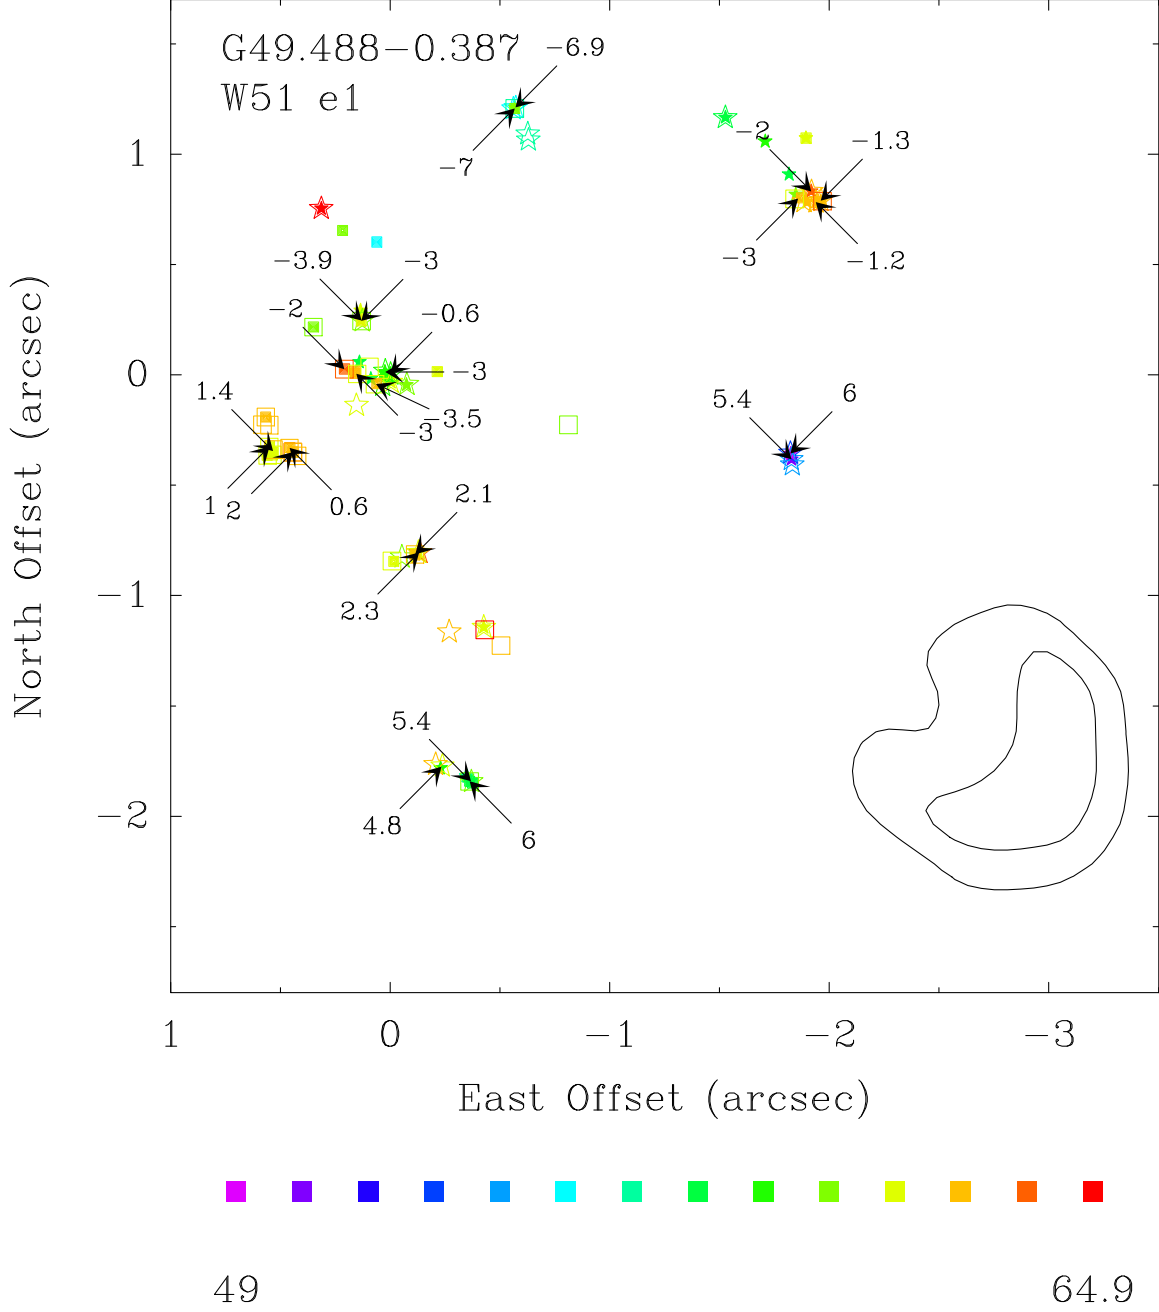


Fig. 17.— Plot of maser spots in W51 M/S e1. Symbols are as in Figure 1.

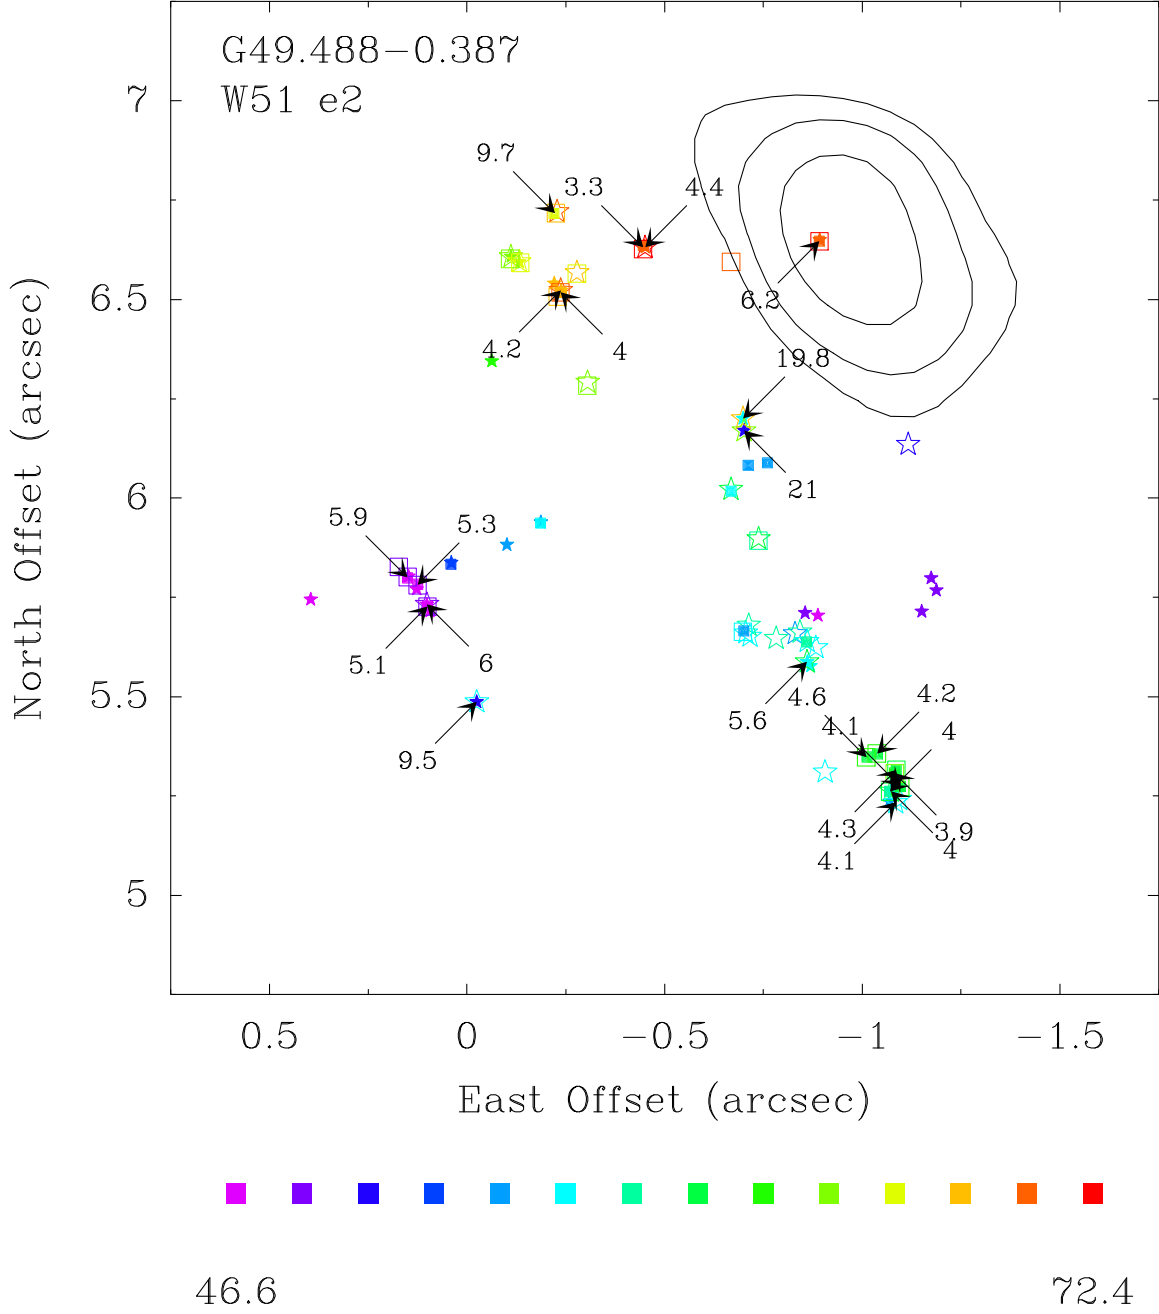


Fig. 18.— Plot of maser spots in W51 M/S e2. Symbols are as in Figure 1. Coordinates are offsets from the origin in Figure 17.

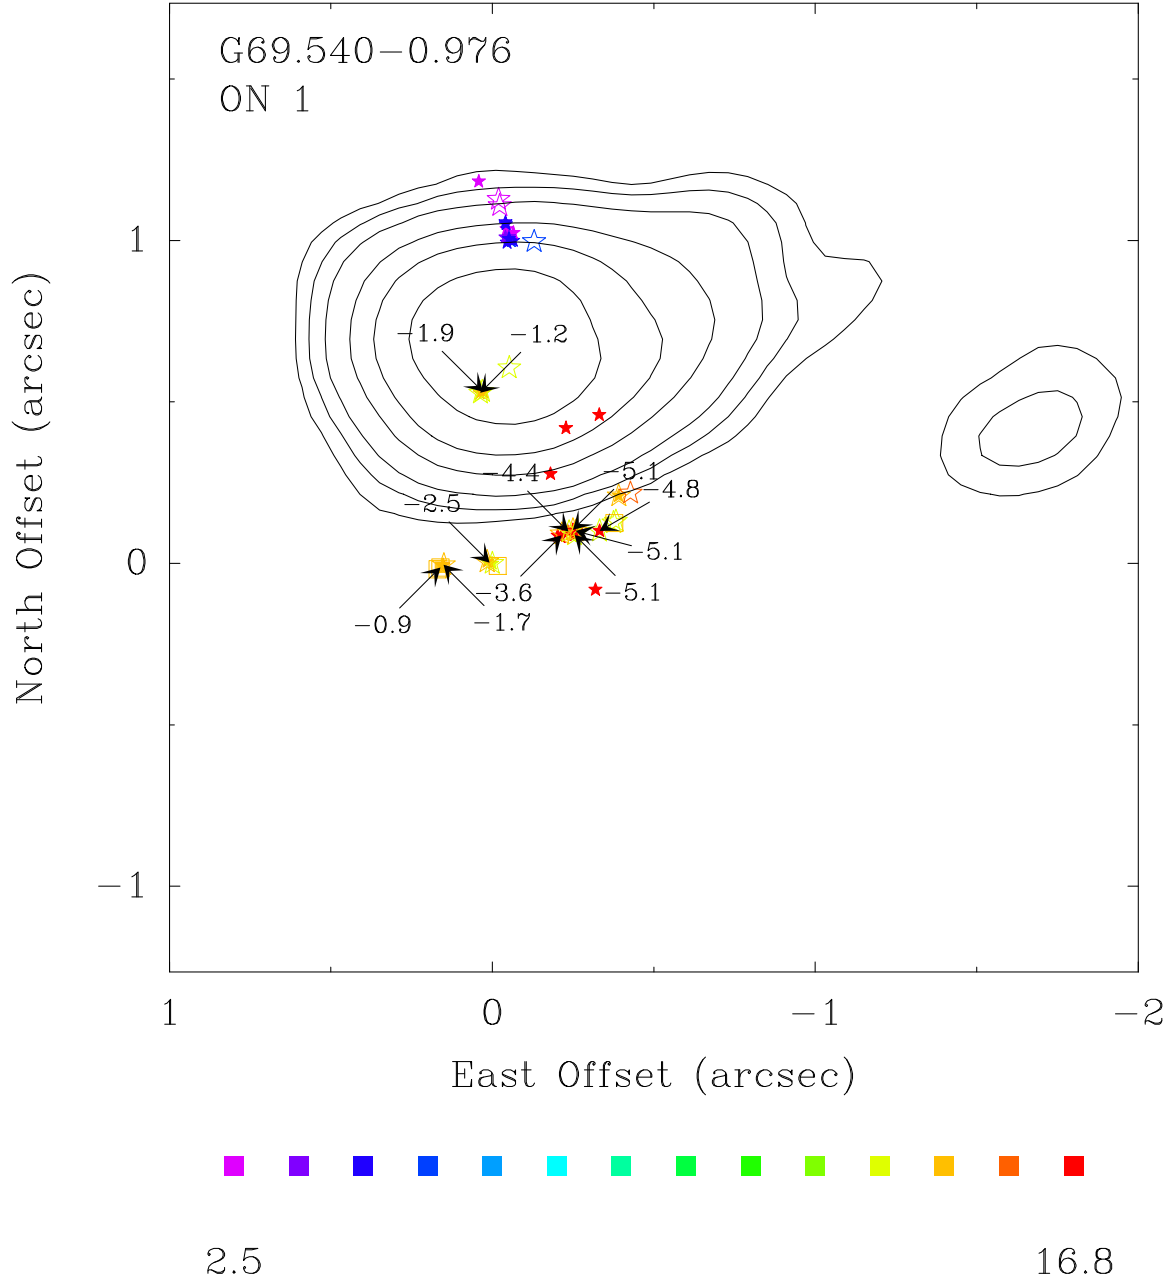


Fig. 19.— Plot of maser spots in ON 1. Symbols are as in Figure 1.

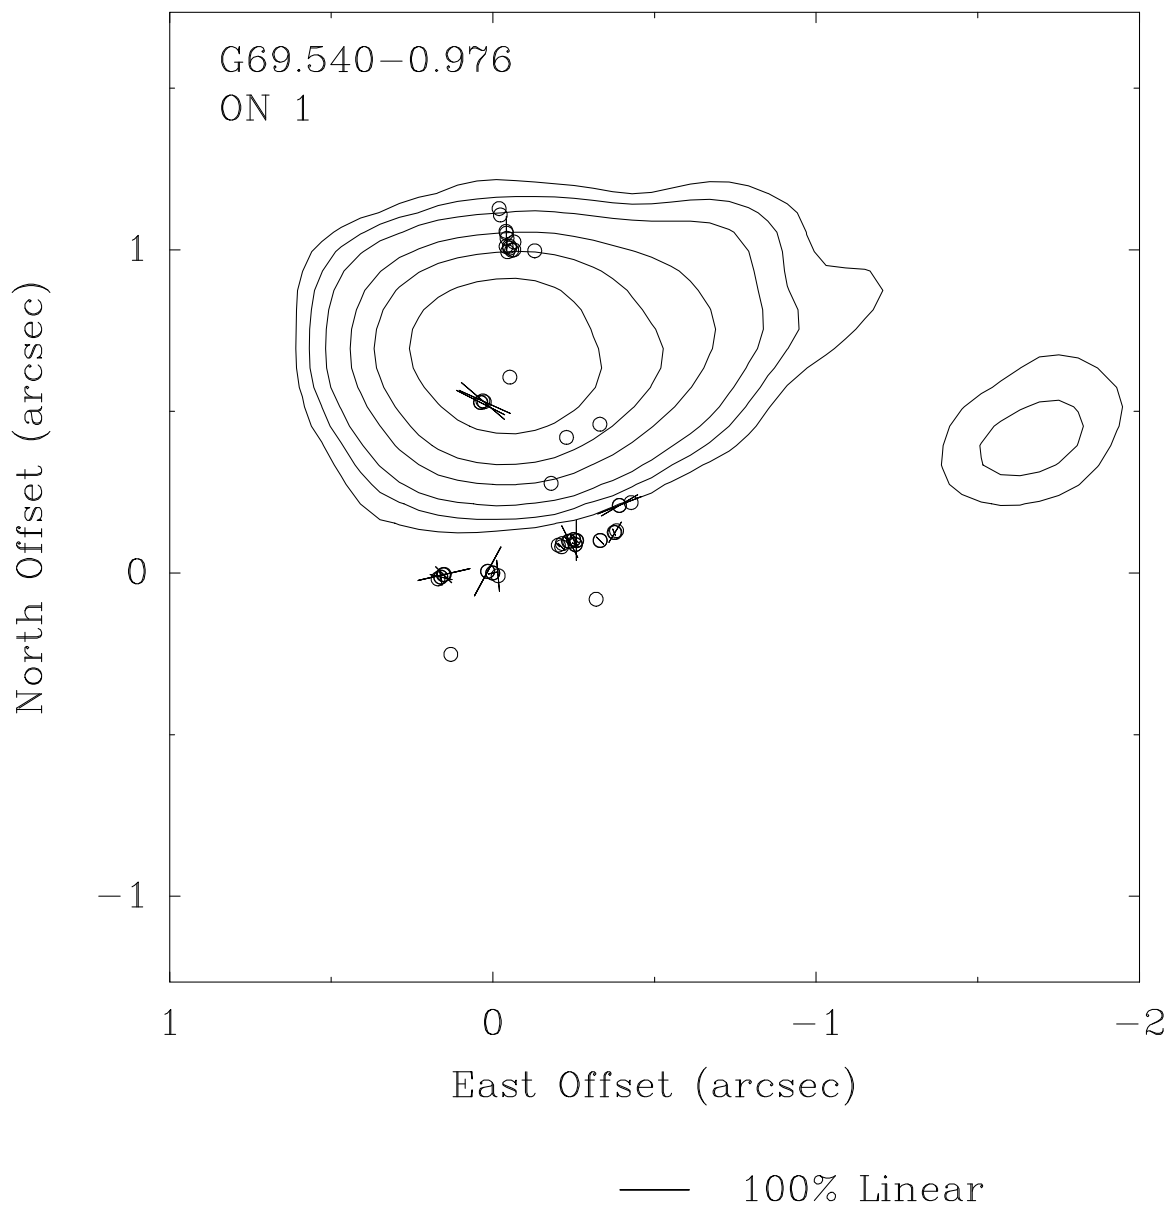


Fig. 20.— Polarization map of ON 1. Symbols are as in Figure 2.

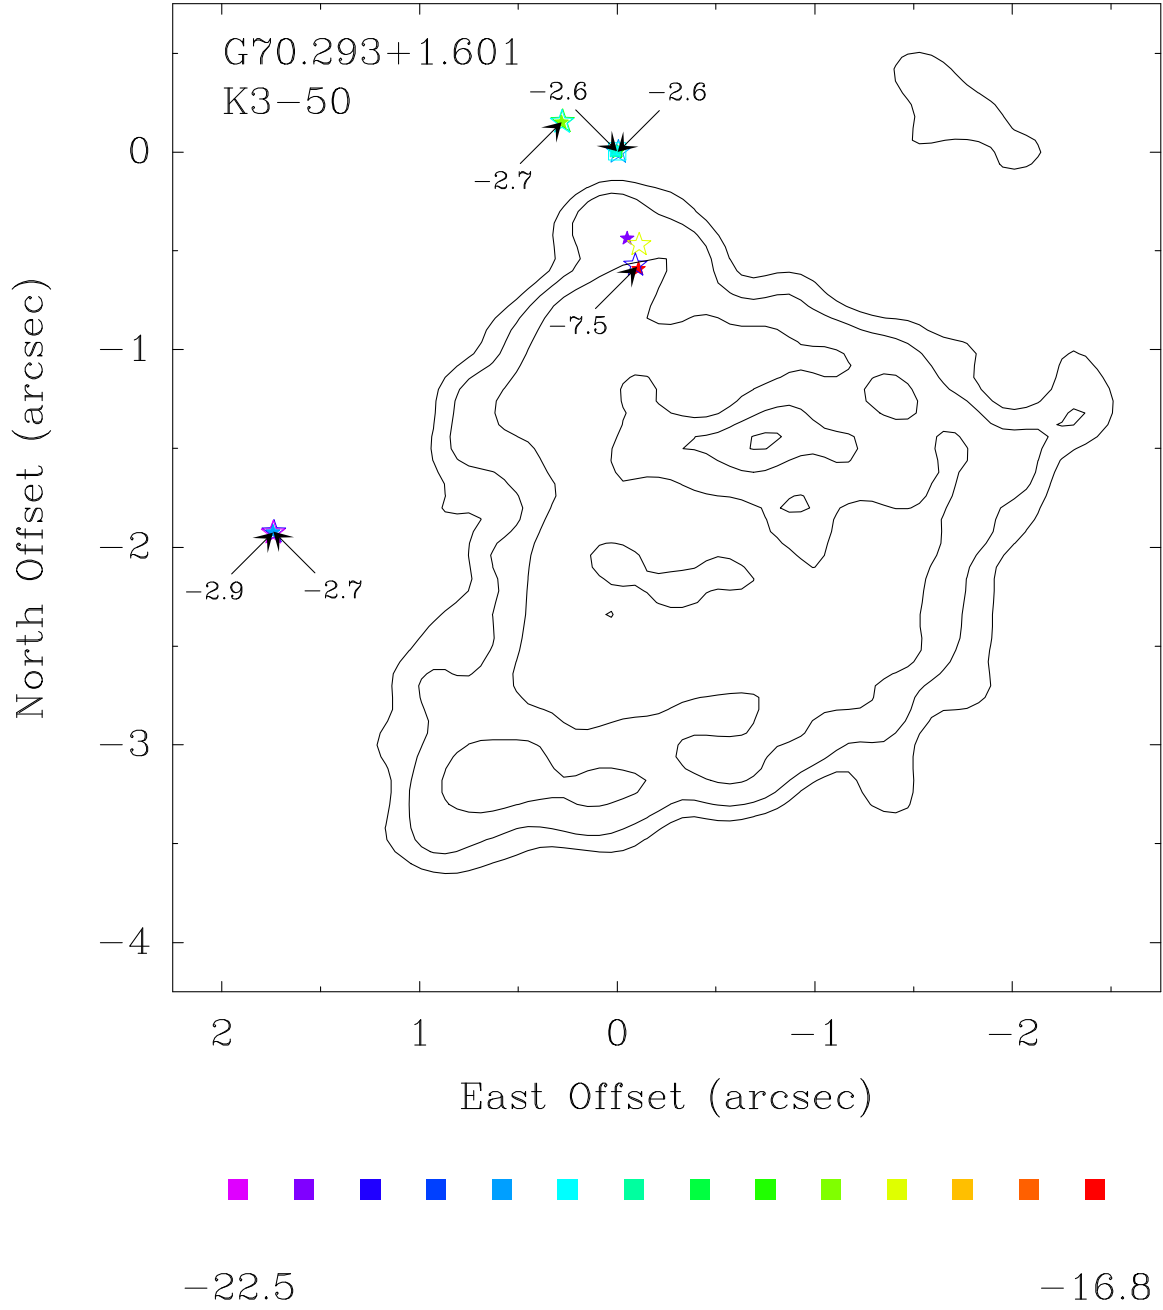


Fig. 21.— Plot of maser spots in K3-50. Symbols are as in Figure 1.

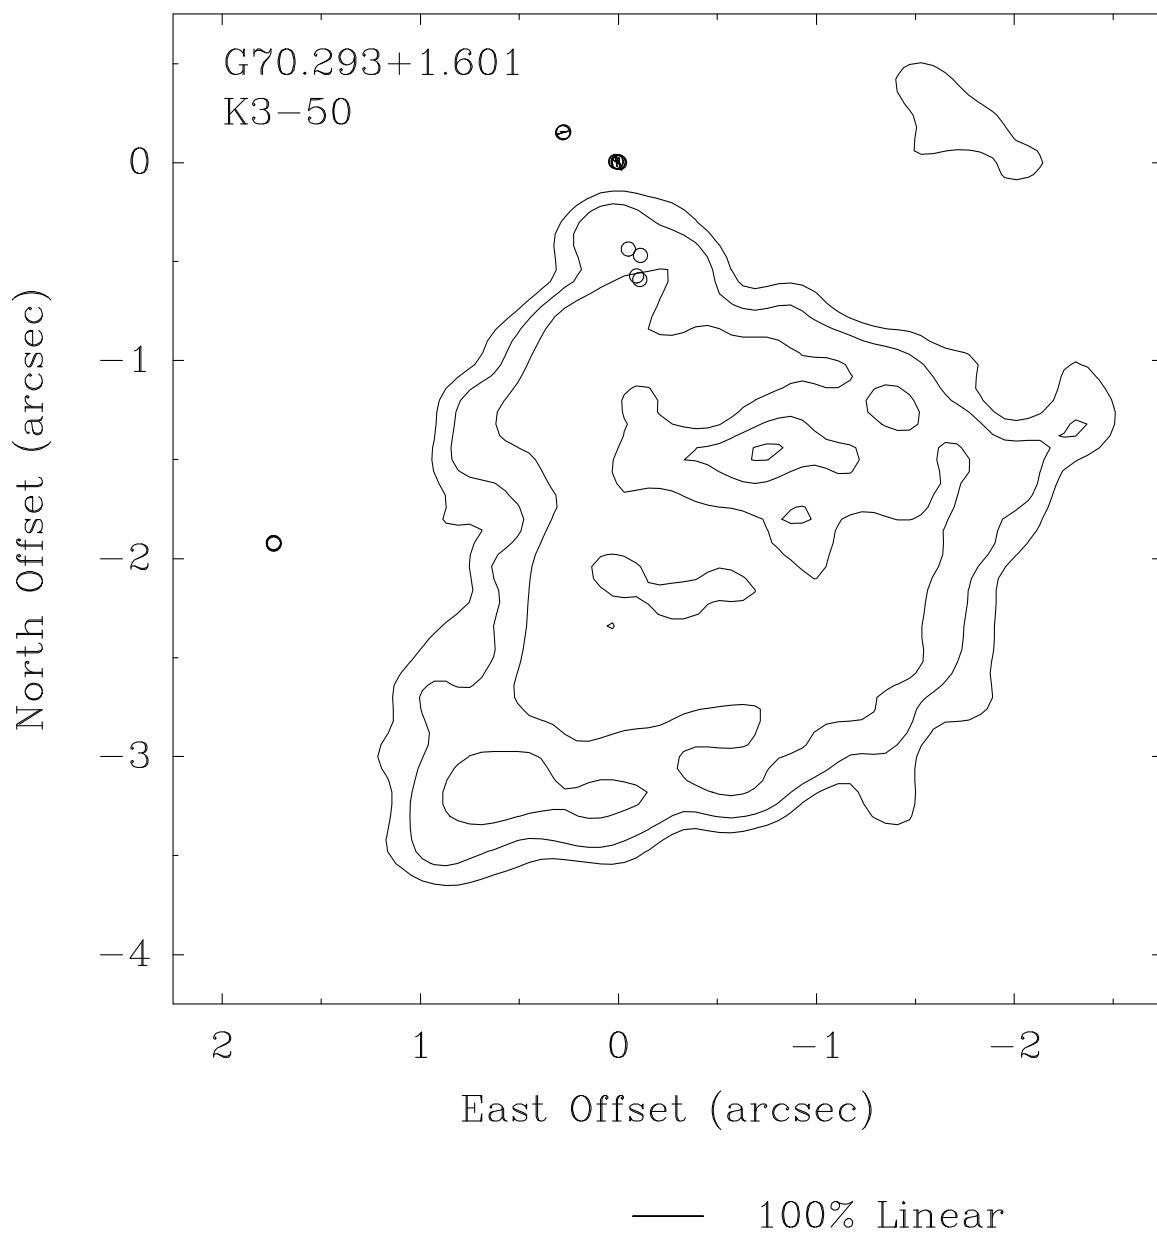


Fig. 22.— Polarization map of K3-50. Symbols are as in Figure 2.

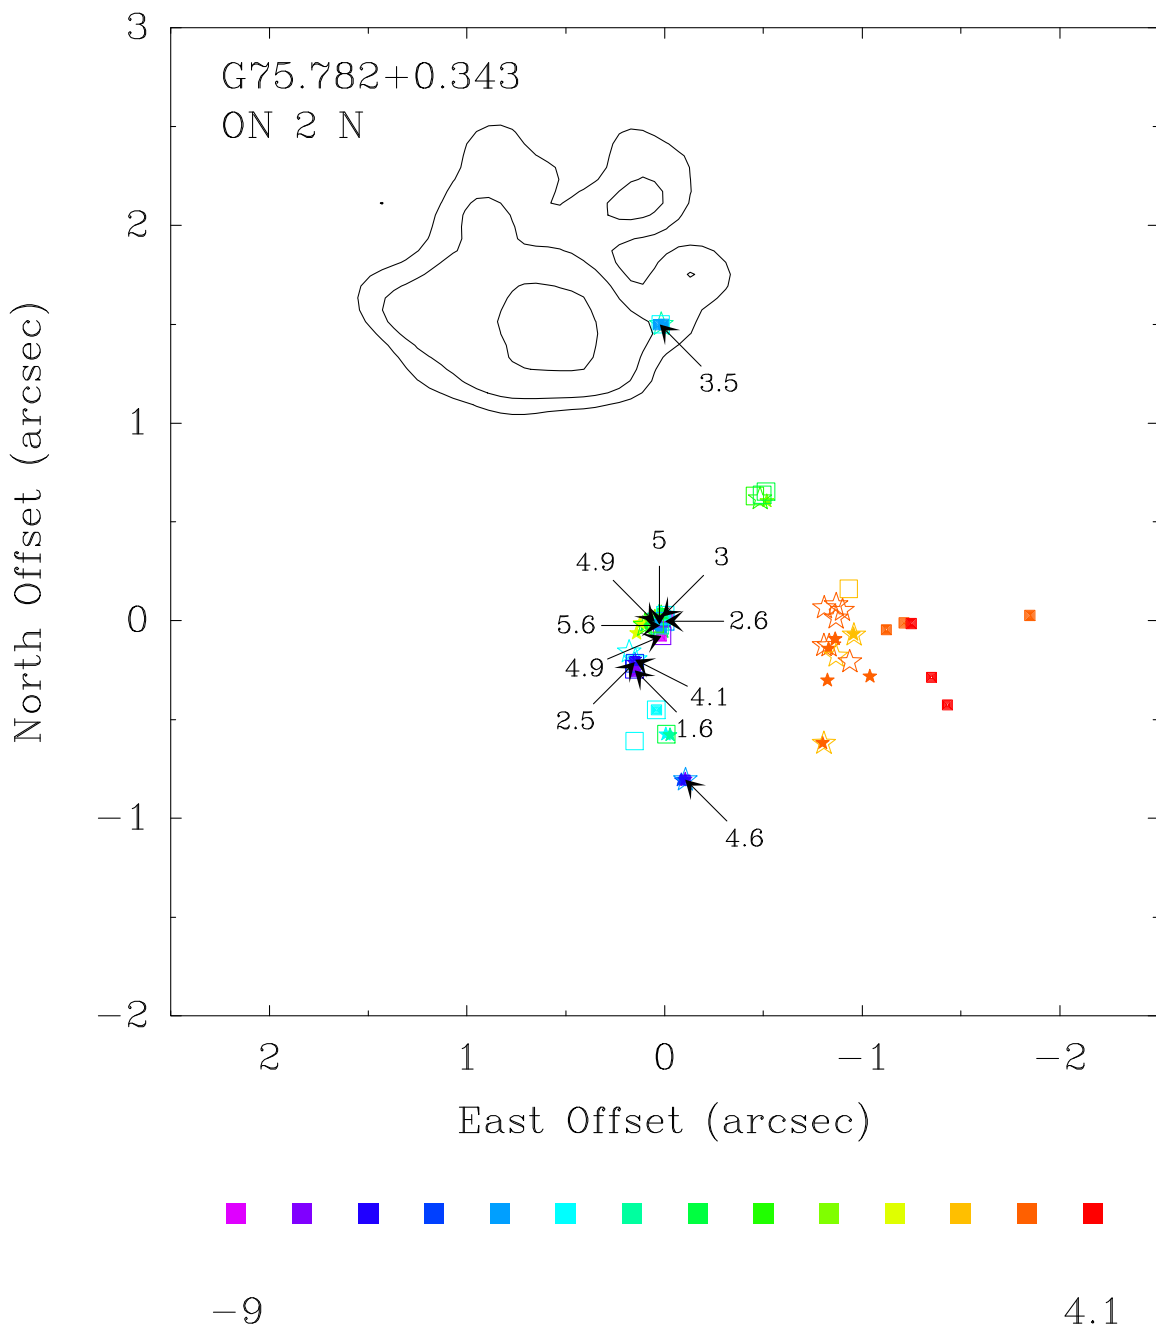


Fig. 23.— Plot of maser spots in ON 2 N. Symbols are as in Figure 1.

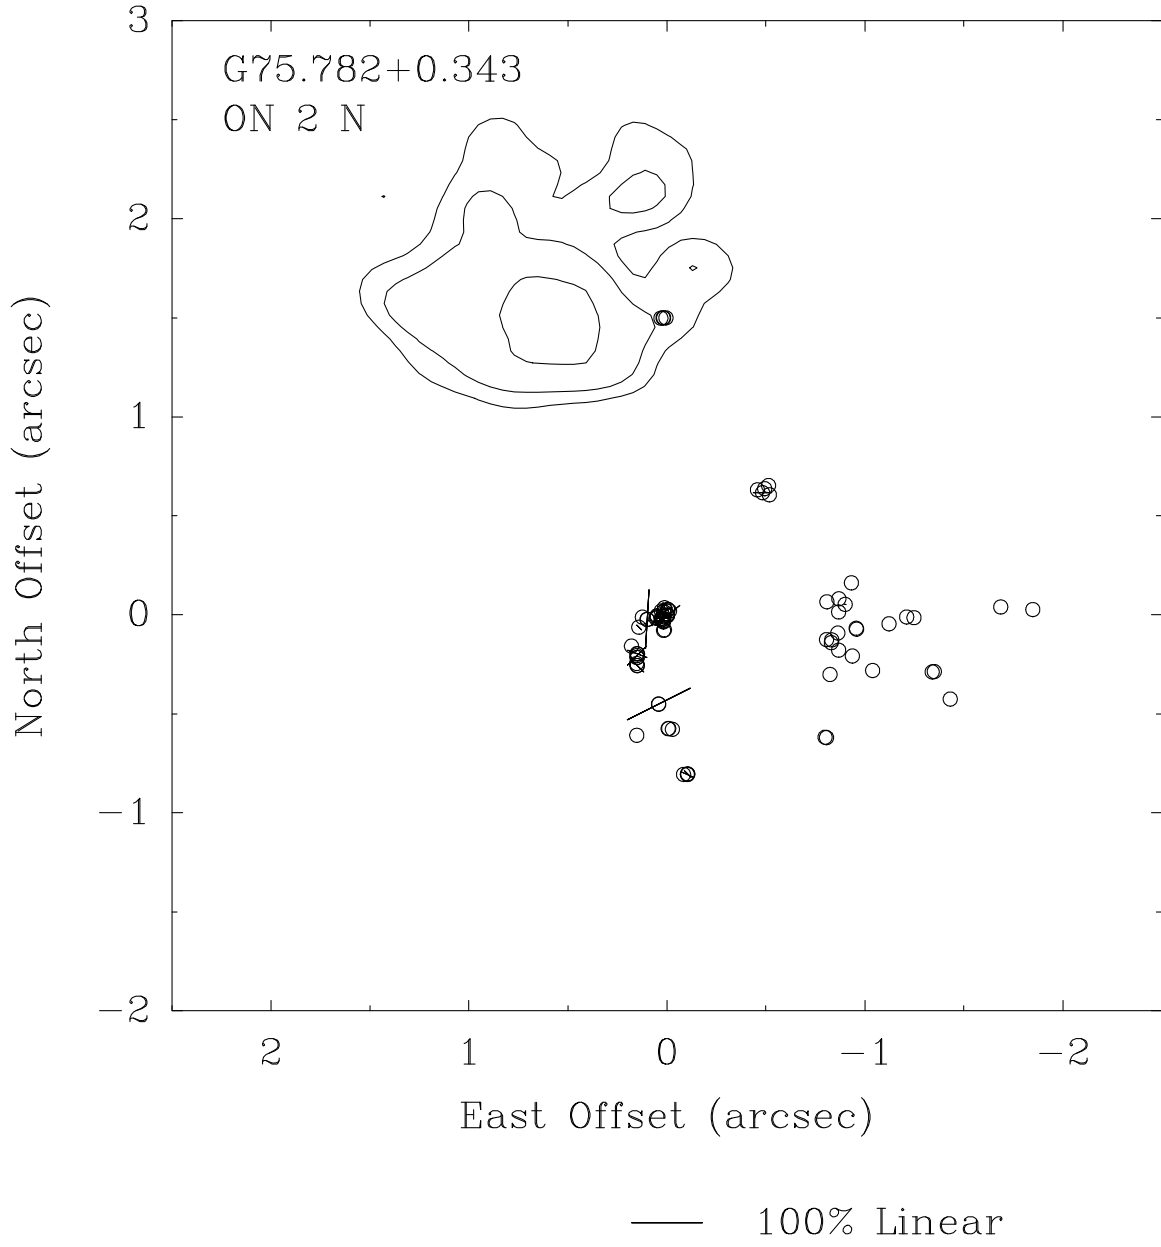


Fig. 24.— Polarization map of ON 2 N. Symbols are as in Figure 2.

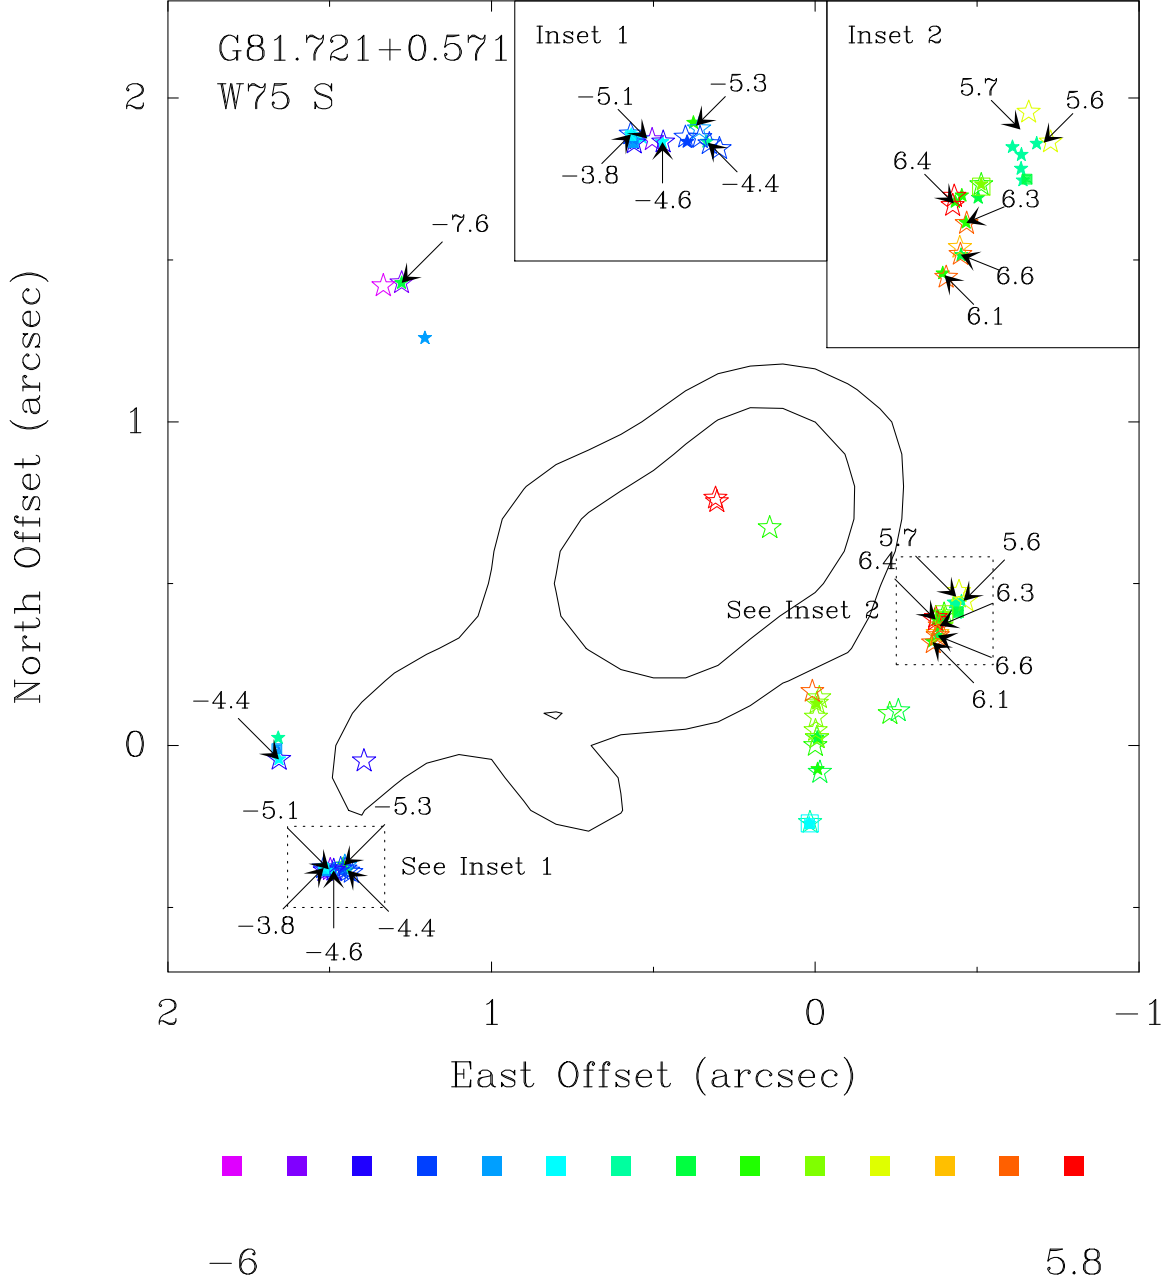


Fig. 25.— Plot of maser spots in W75 S. The masers are superposed on a U-band continuum map. Symbols are as in Figure 1.

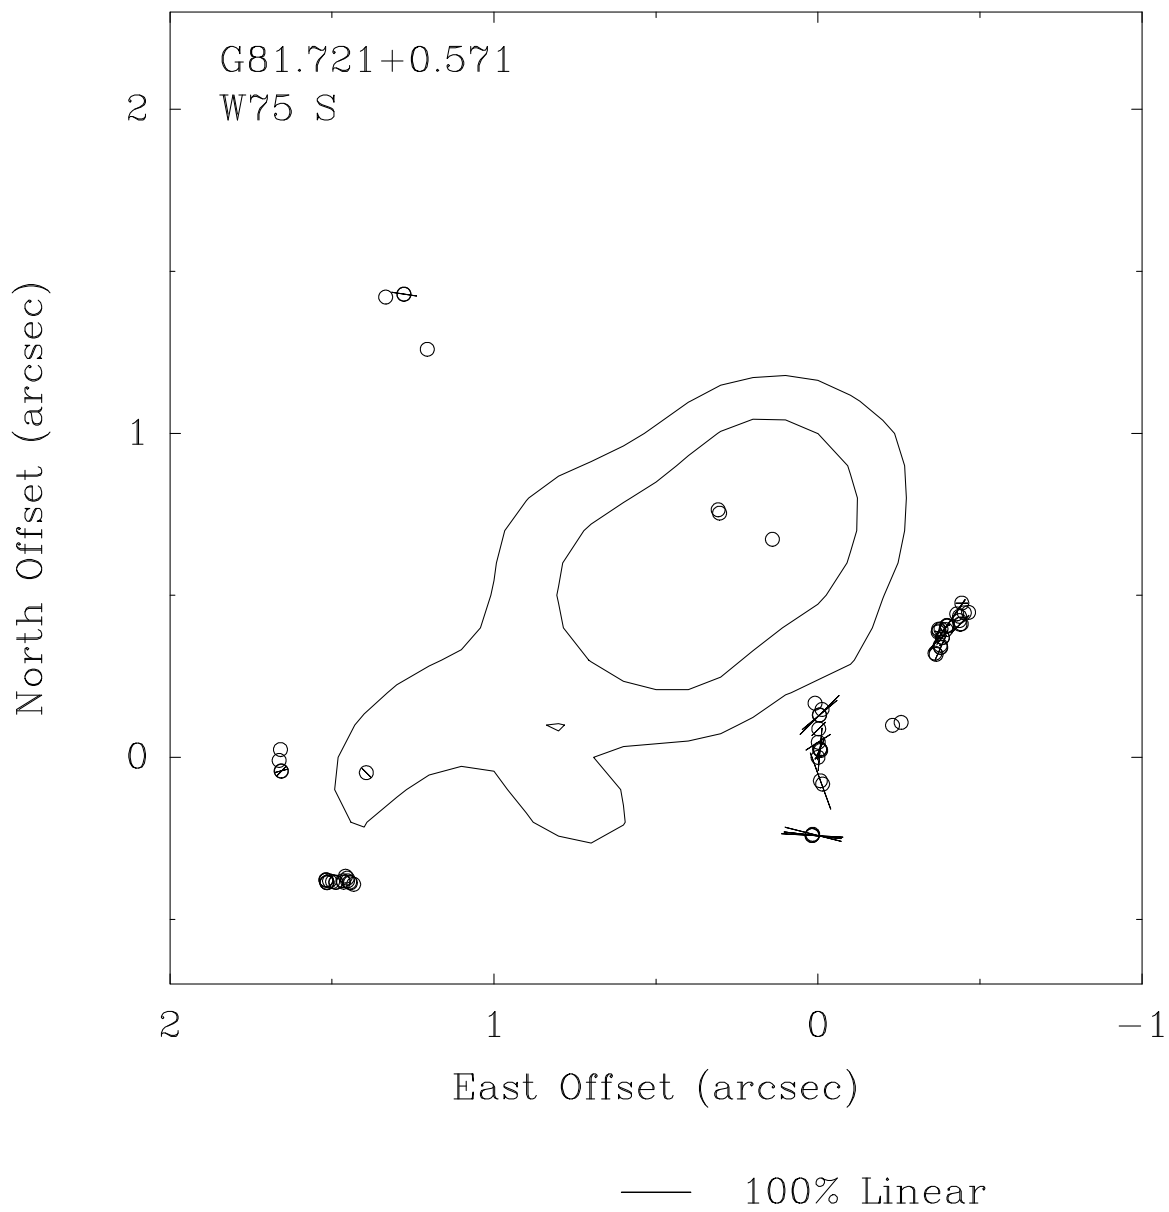


Fig. 26.— Polarization map of W75 S. The masers are superposed on a U-band continuum map. Symbols are as in Figure 2.

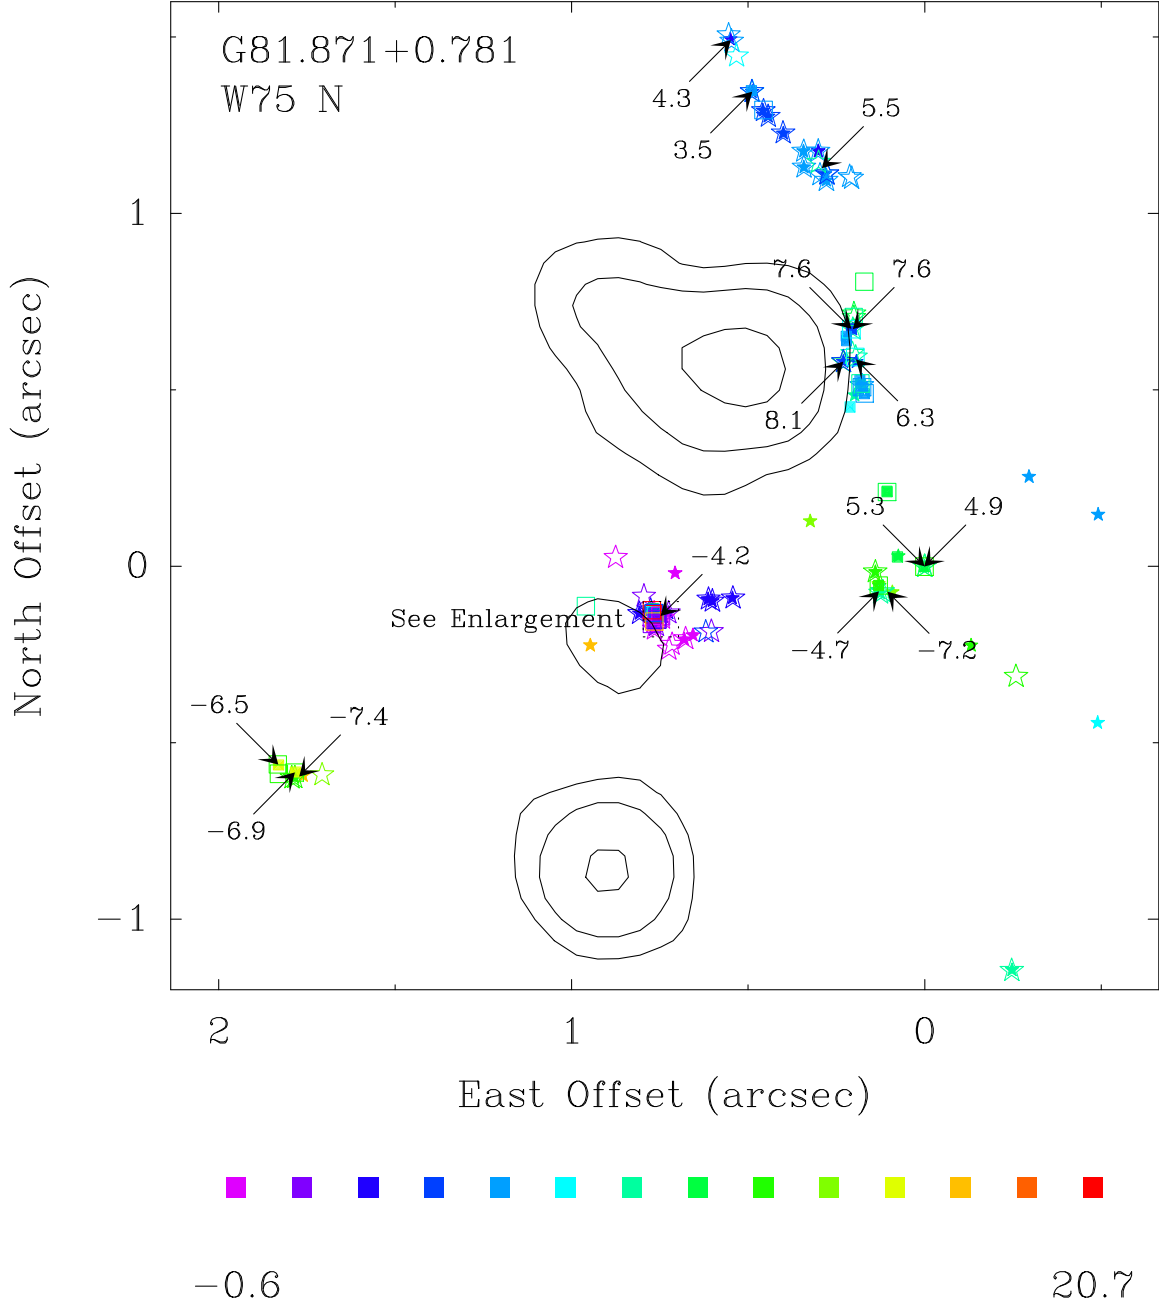


Fig. 27.— Plot of maser spots in W75 N. Symbols are as in Figure 1.

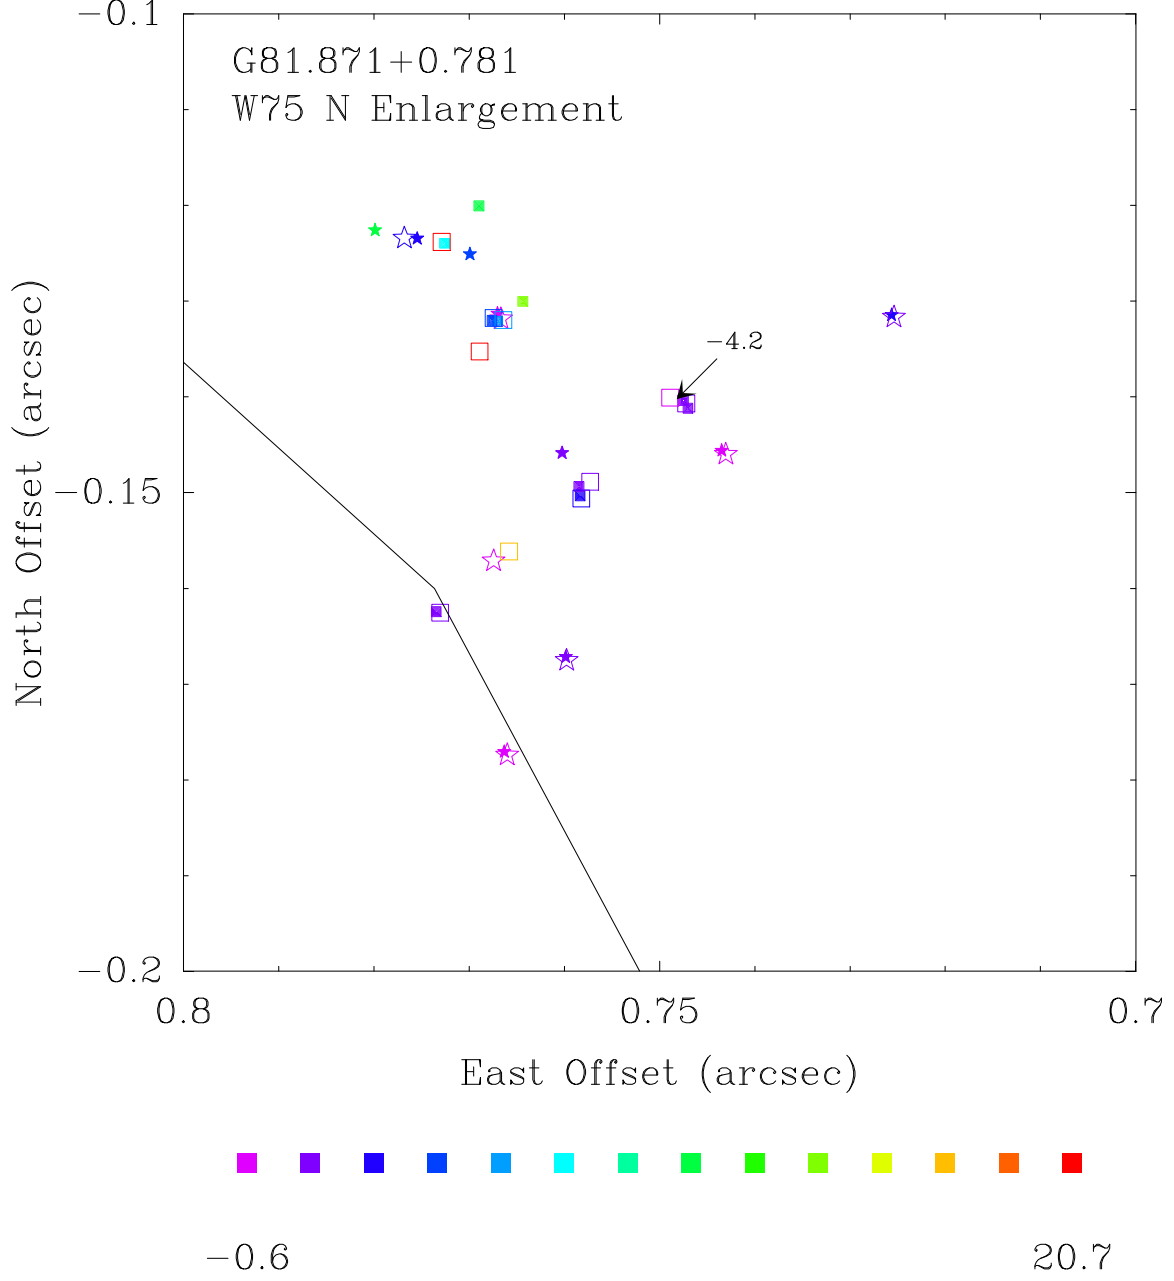


Fig. 28.— Enlargement of cluster of maser spots in W75 N in Figure 27. Symbols are as in Figure 1.

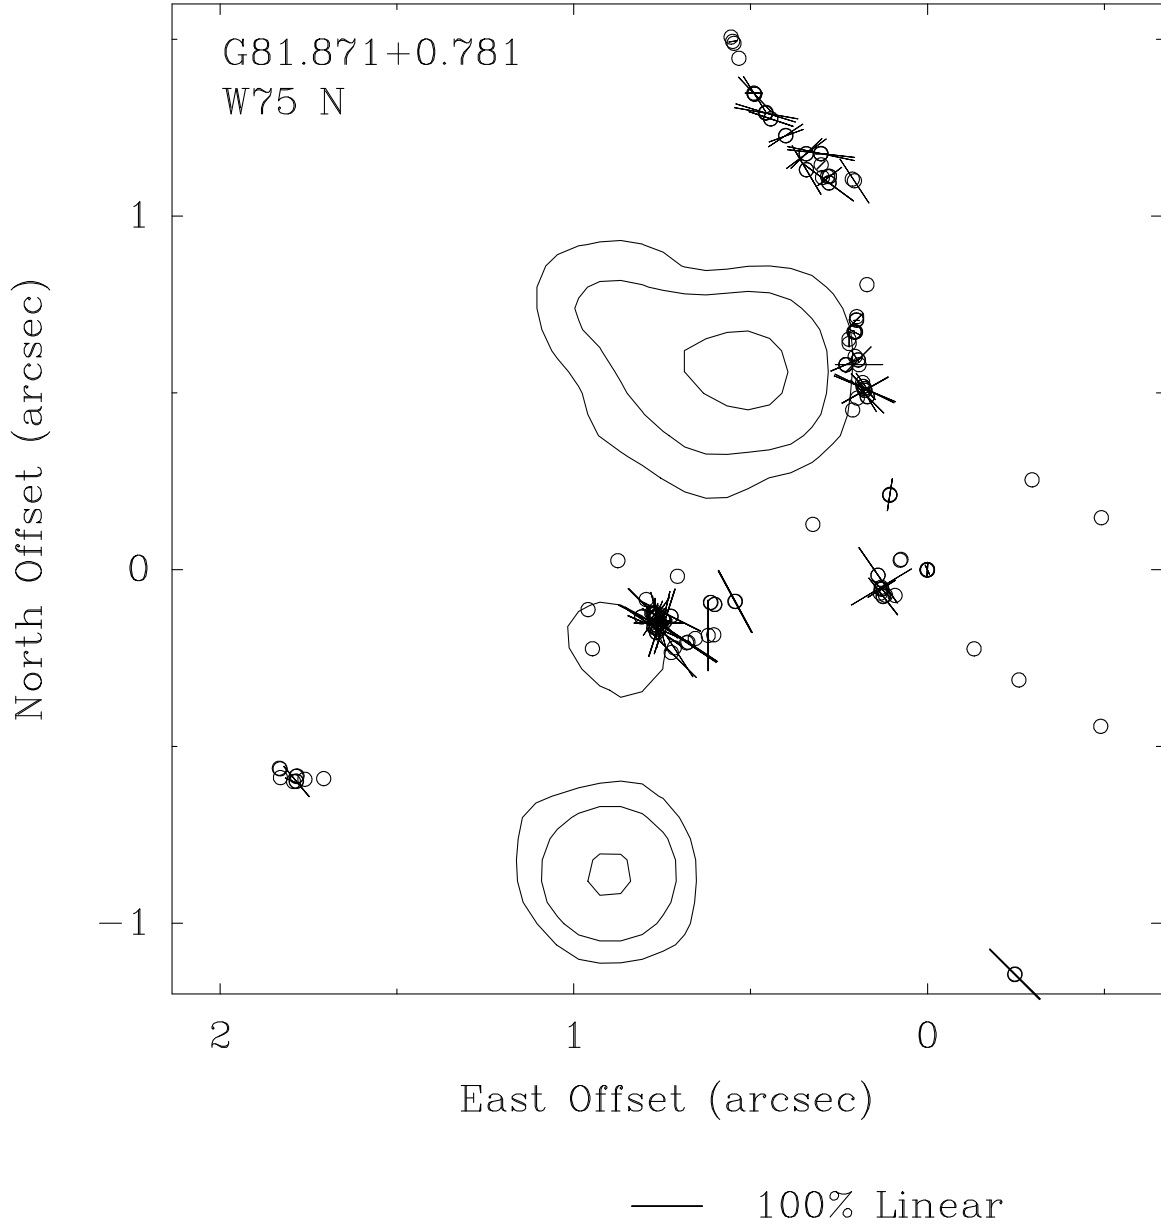


Fig. 29.— Polarization map of W75 N. Symbols are as in Figure 2.

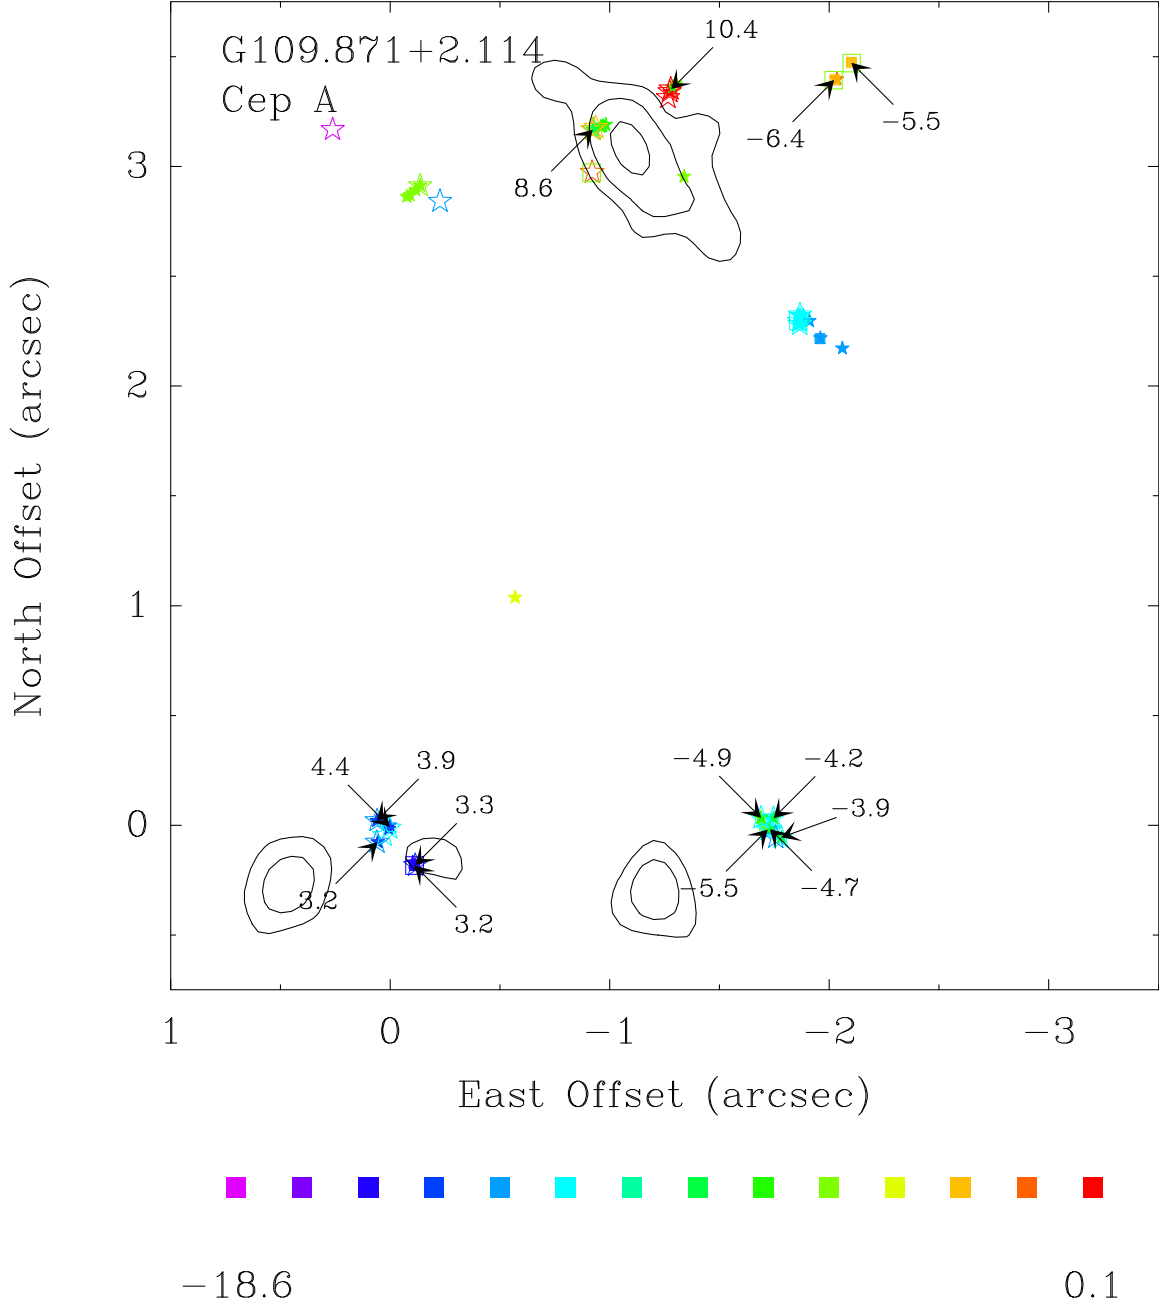


Fig. 30.— Plot of maser spots in Cep A. Symbols are as in Figure 1.

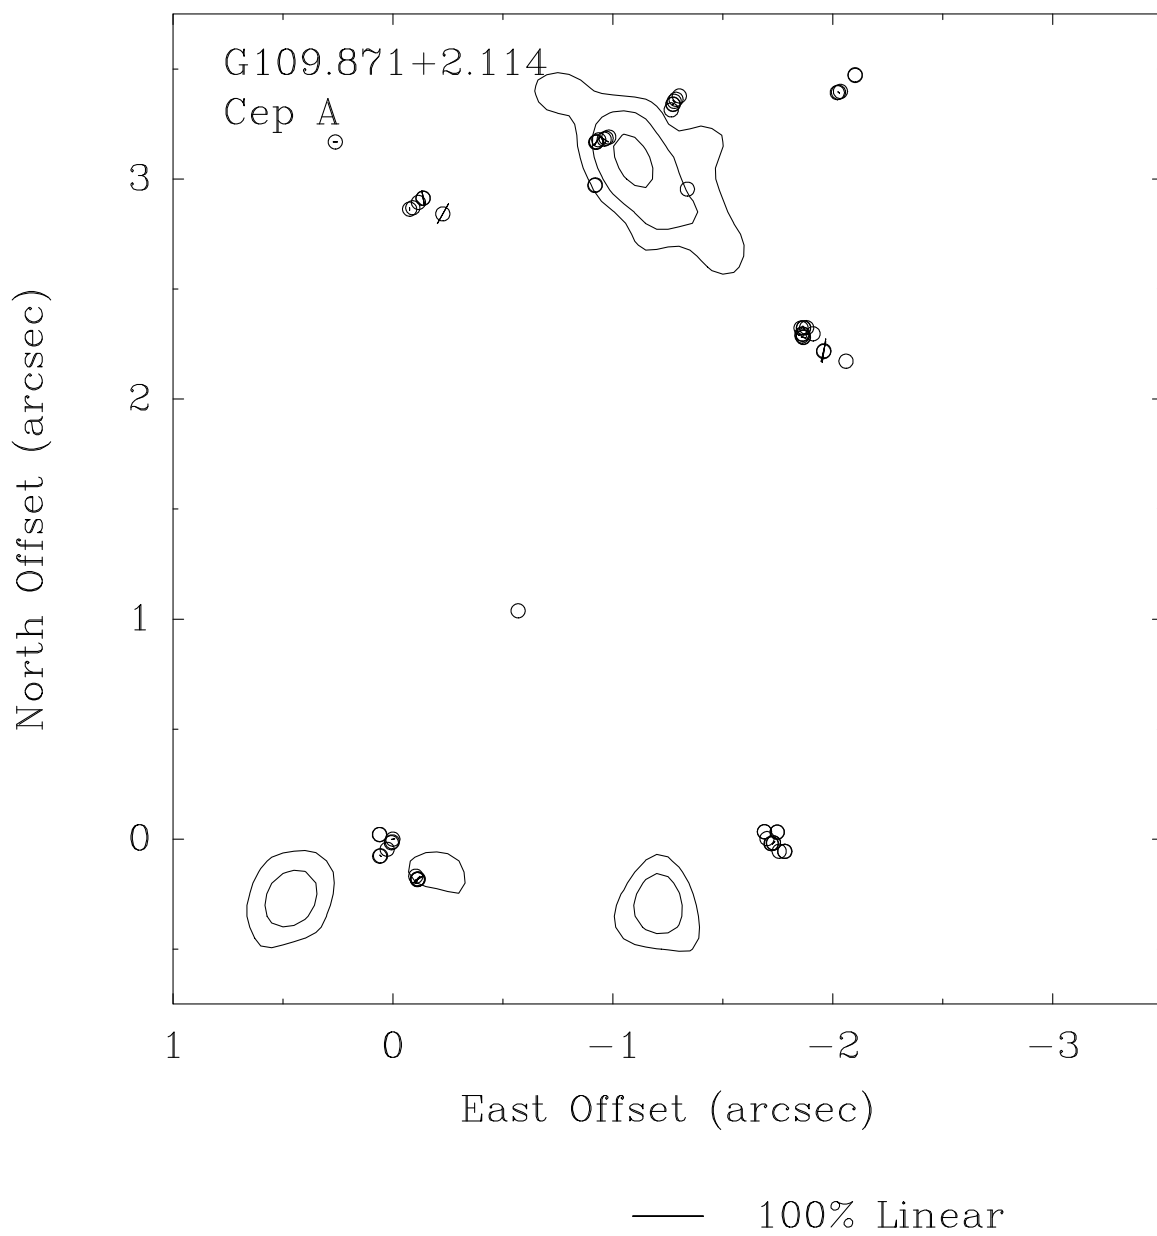


Fig. 31.— Polarization map of Cep A. Symbols are as in Figure 2.

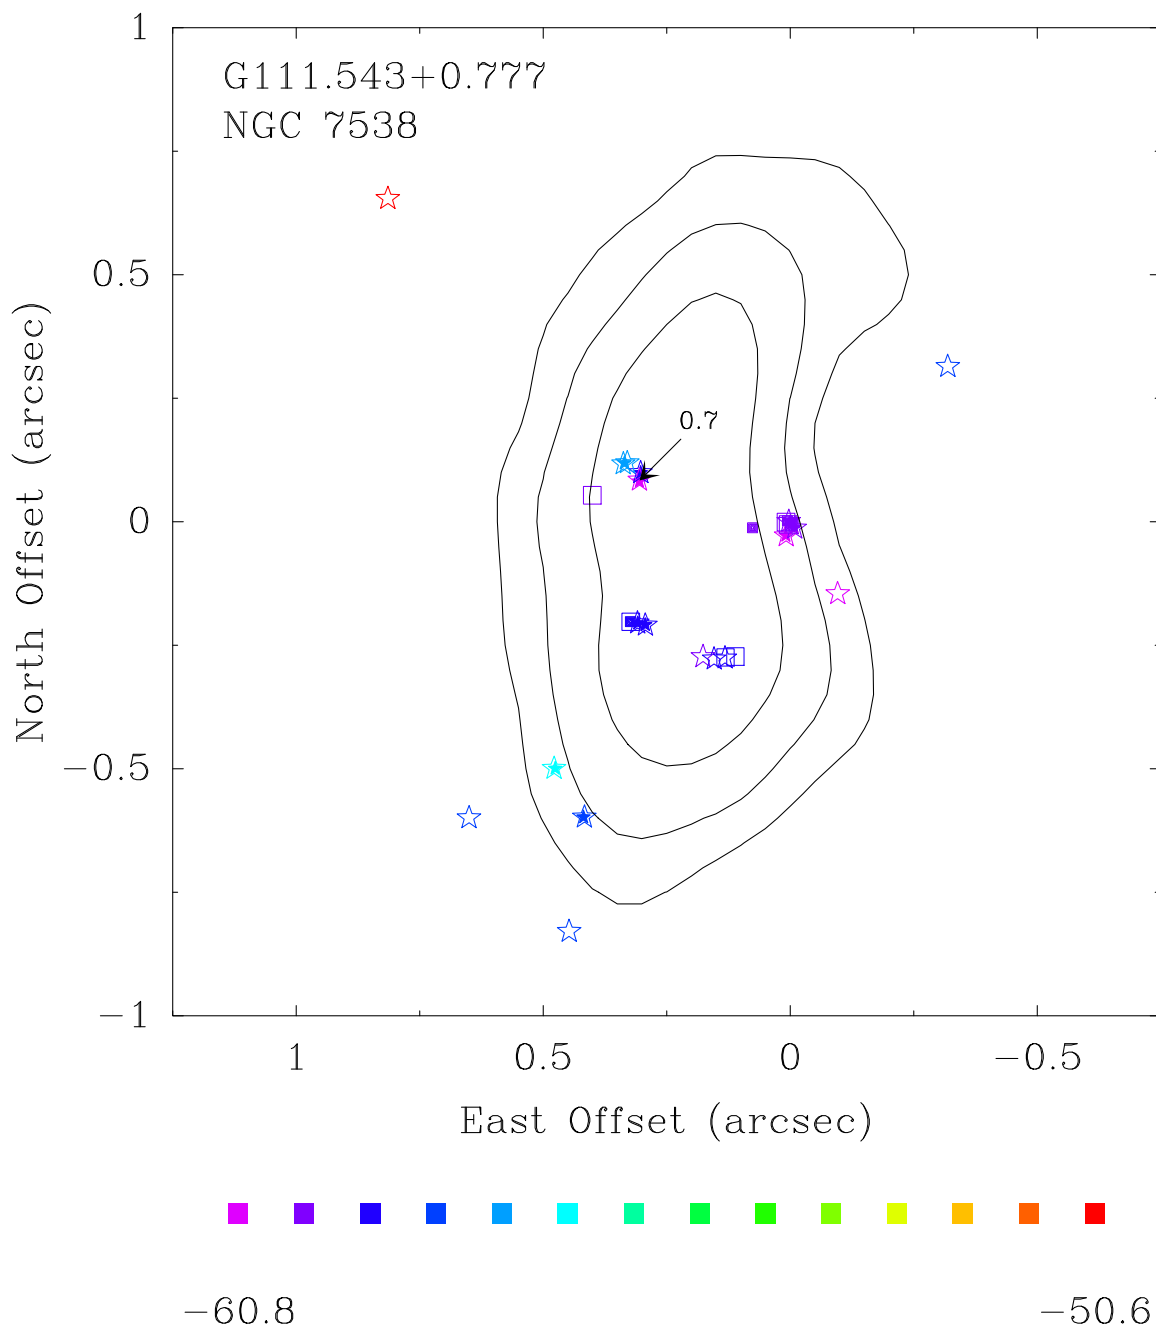


Fig. 32.— Plot of maser spots in NGC 7538. Symbols are as in Figure 1.

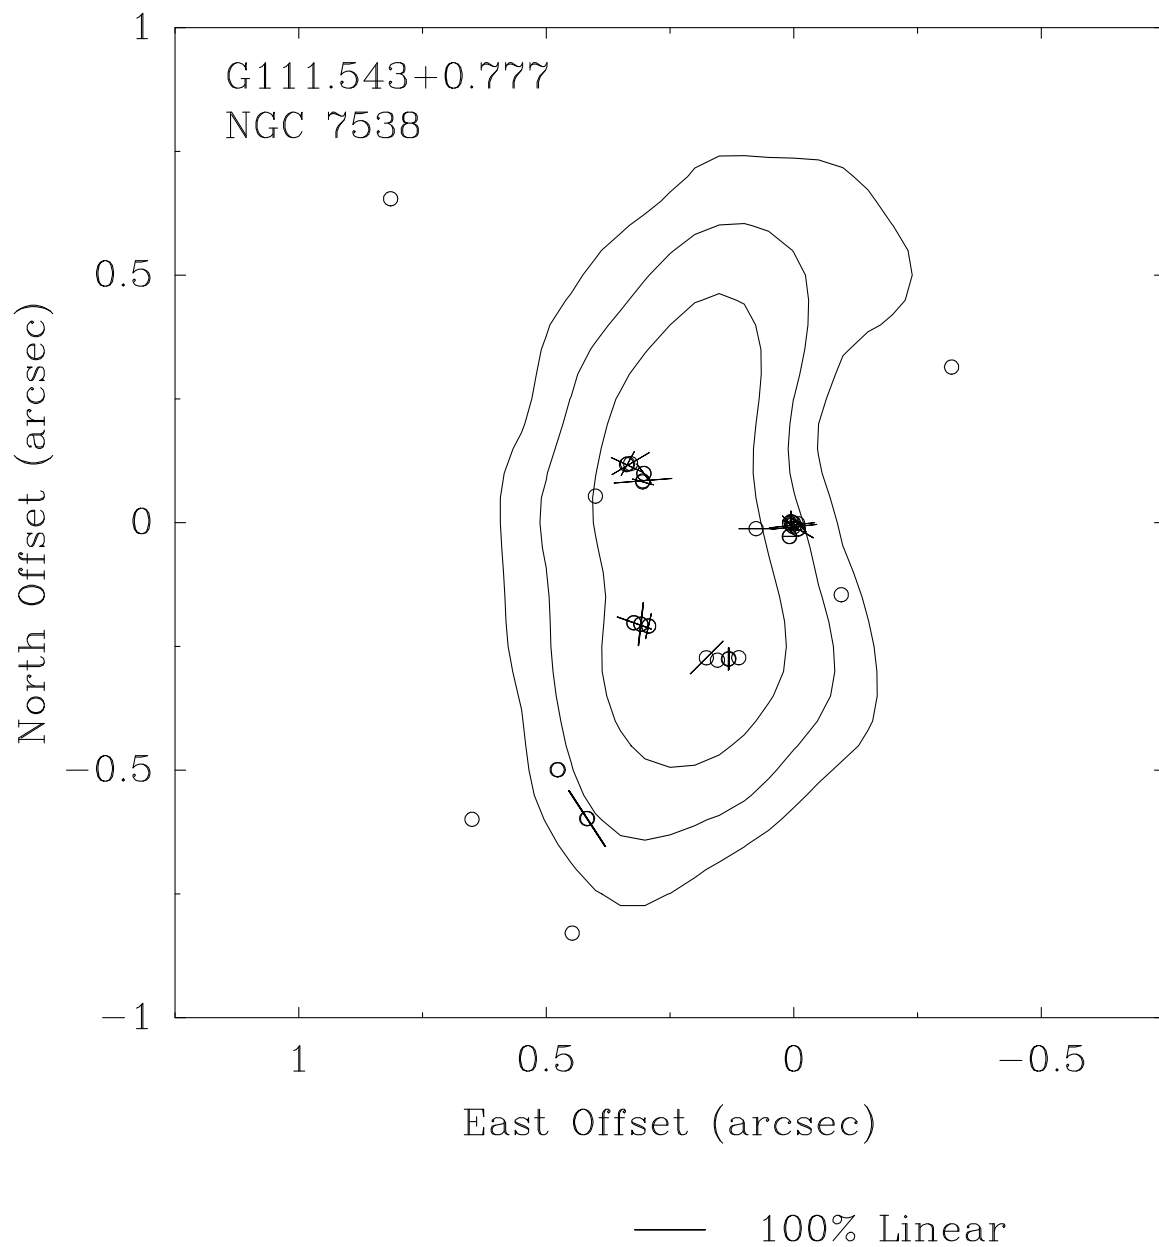


Fig. 33.— Polarization map of NGC 7538. Symbols are as in Figure 2.

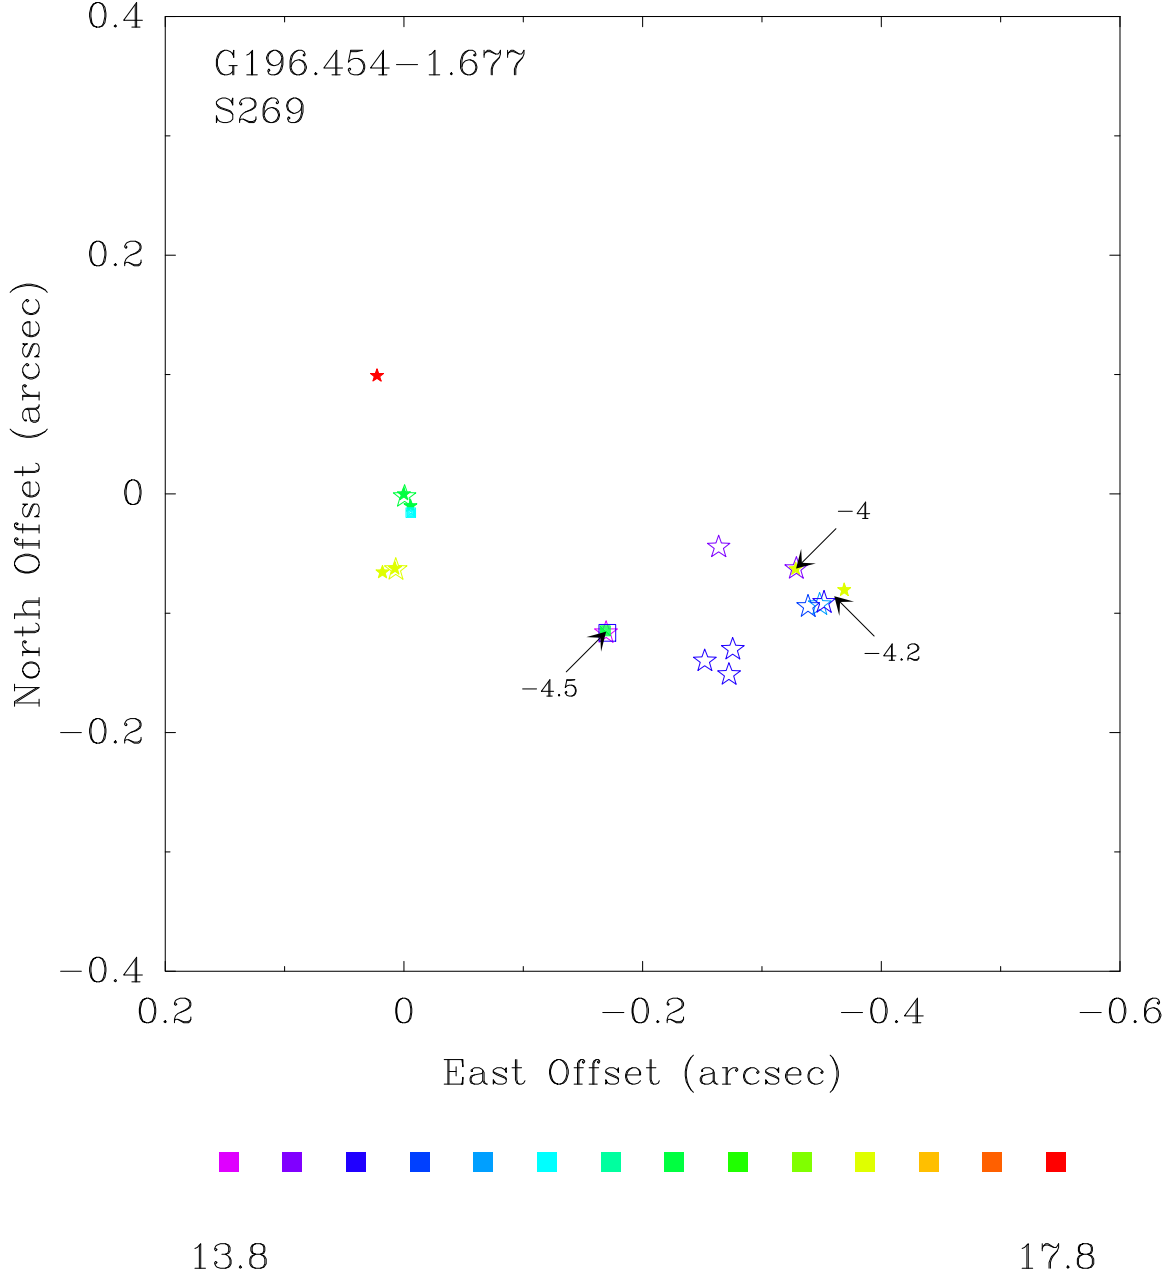


Fig. 34.— Plot of maser spots in S269. There is no detectable continuum emission in the region. Symbols are as in Figure 1.

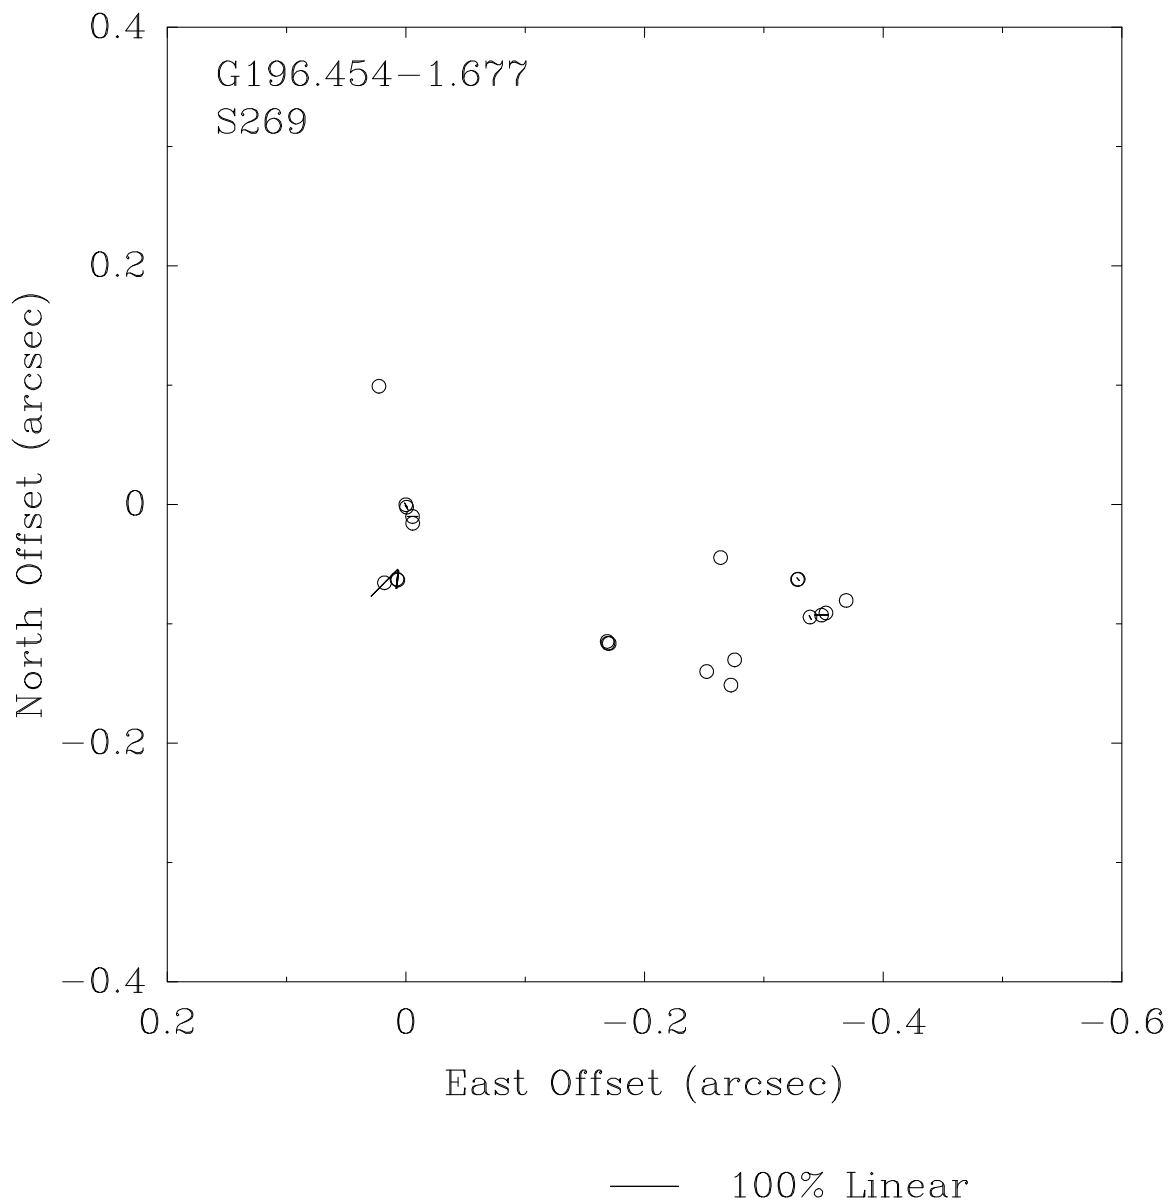


Fig. 35.— Polarization map of S269. There is no detectable continuum emission in the region. Symbols are as in Figure 2.

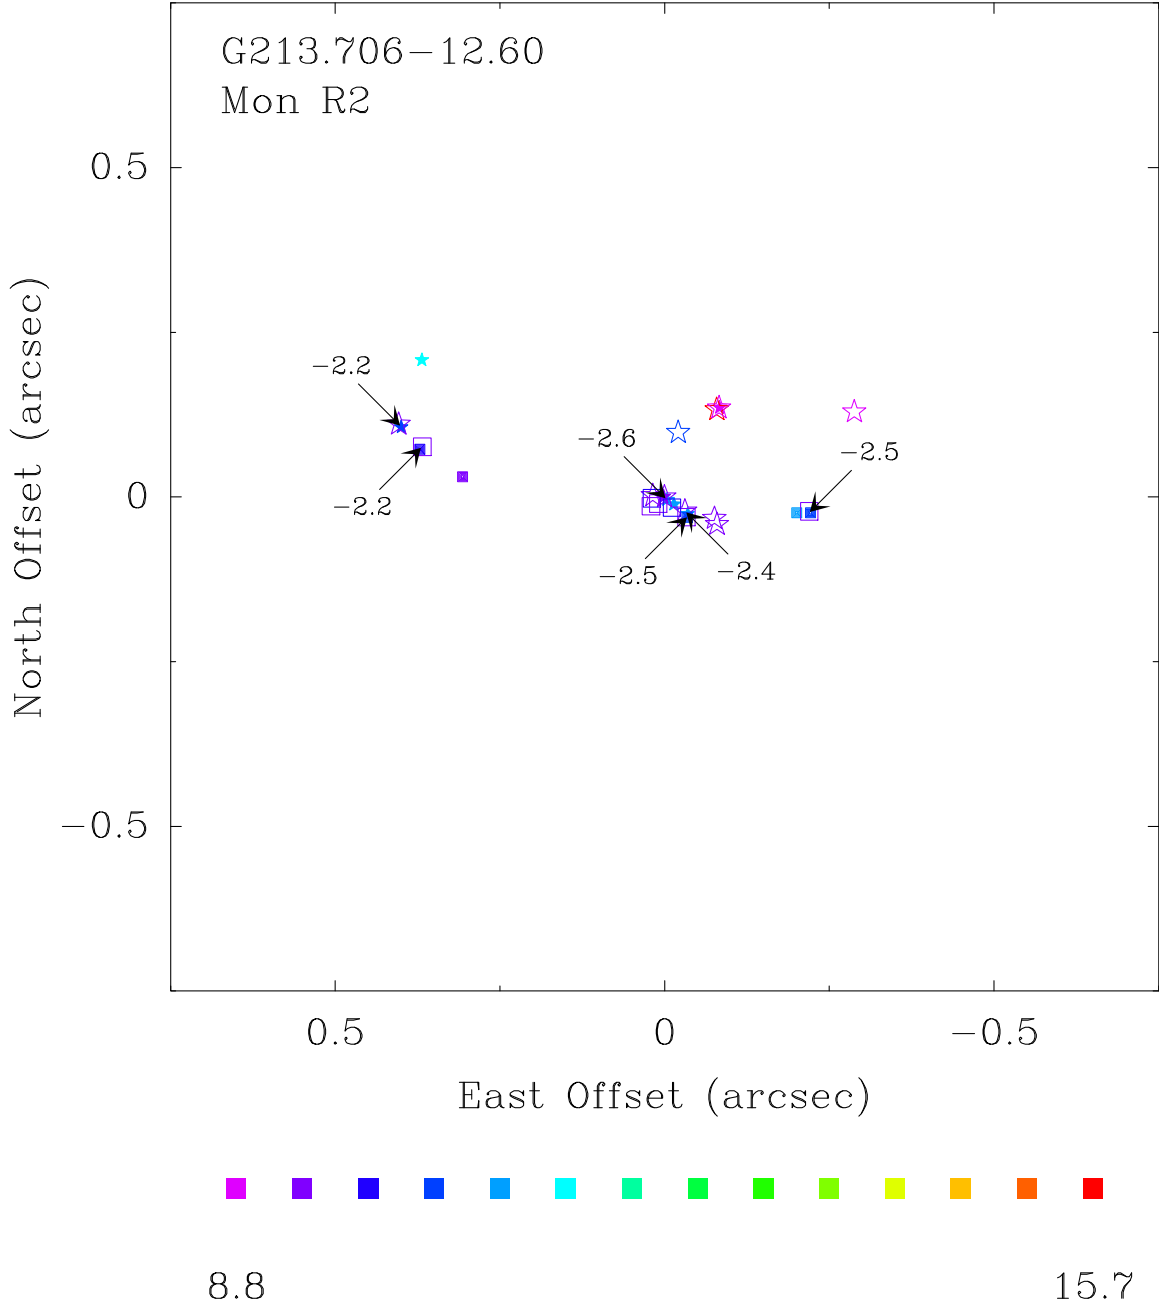


Fig. 36.— Plot of maser spots in Mon R2. There is no detectable continuum emission in the region. Symbols are as in Figure 1.

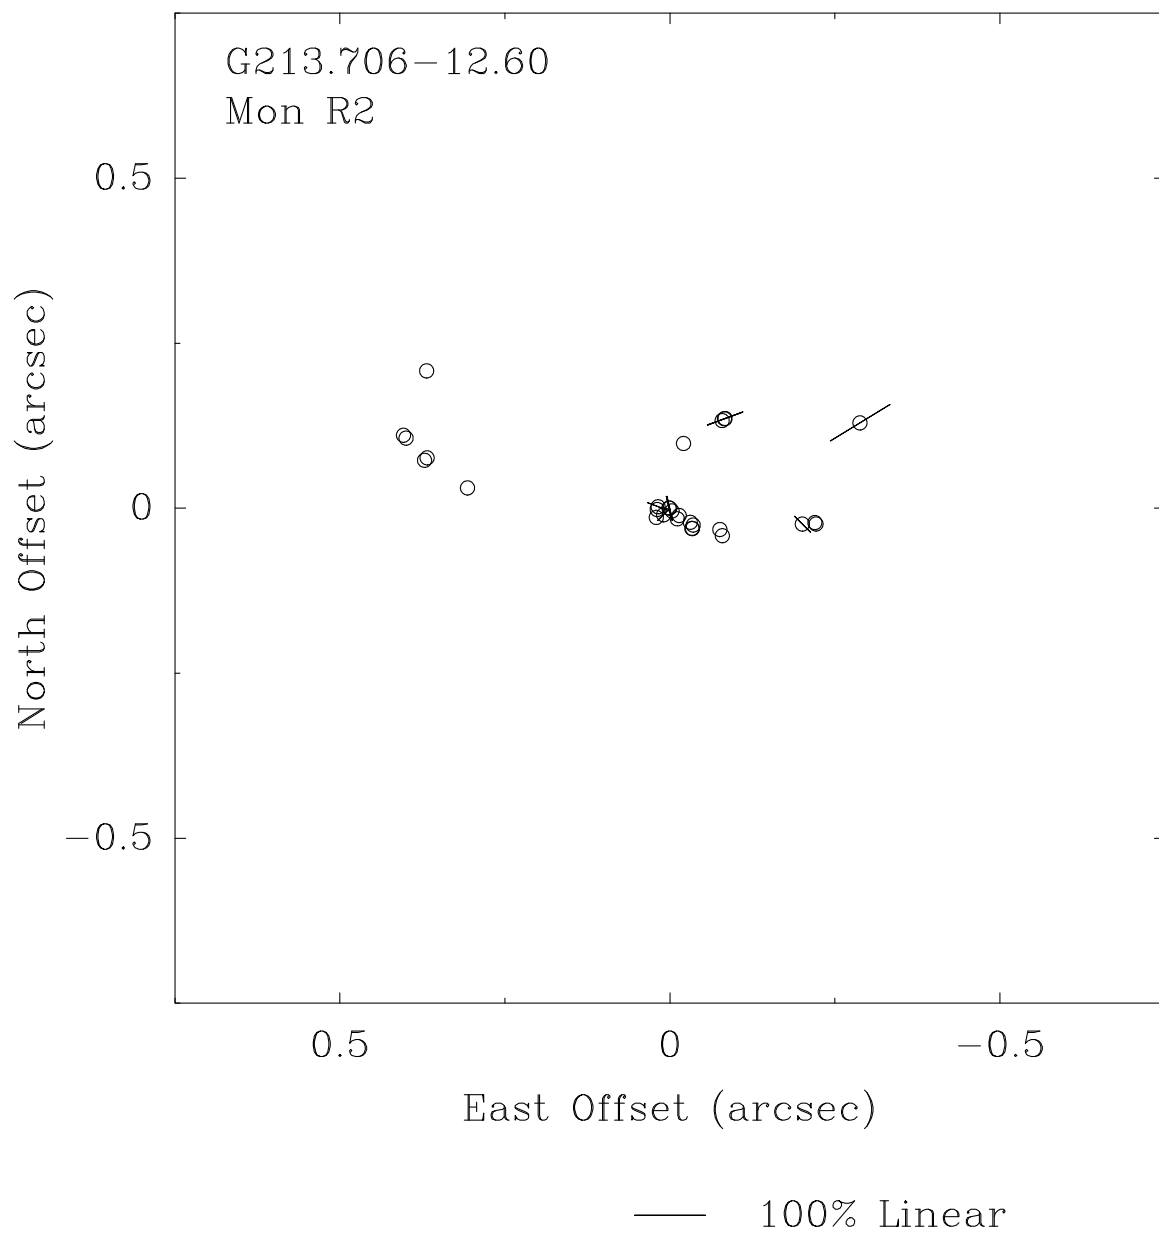


Fig. 37.— Polarization map of Mon R2. There is no detectable continuum emission in the region. Symbols are as in Figure 2.

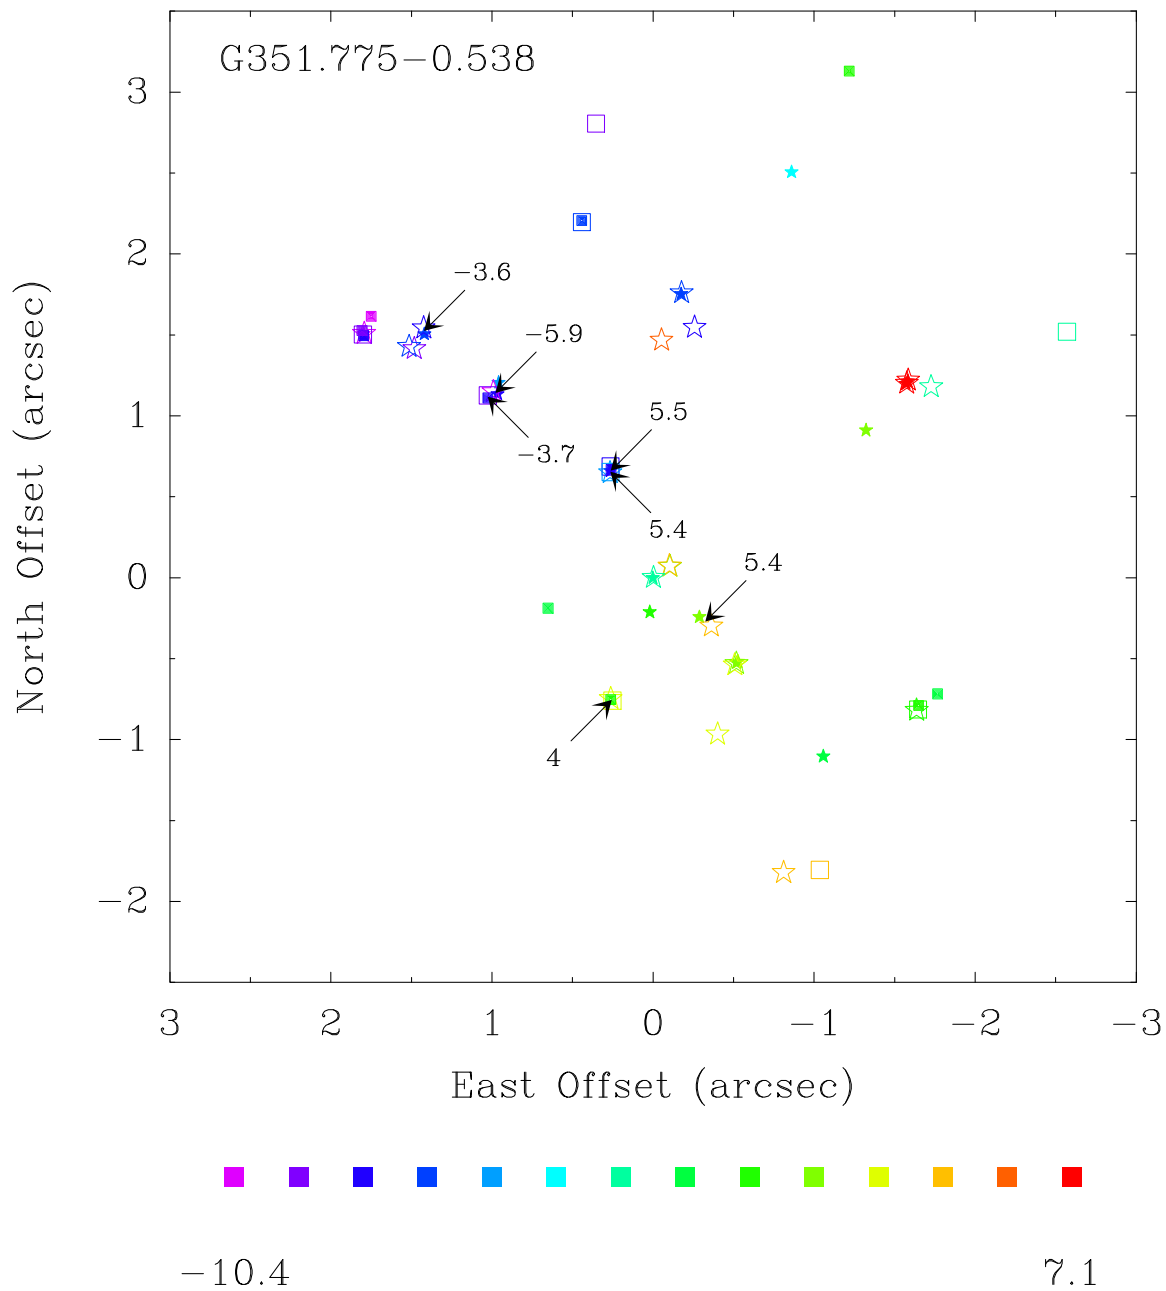


Fig. 38.— Plot of maser spots in G351.775-0.538. Symbols are as in Figure 1. A continuum source to the east is not shown.

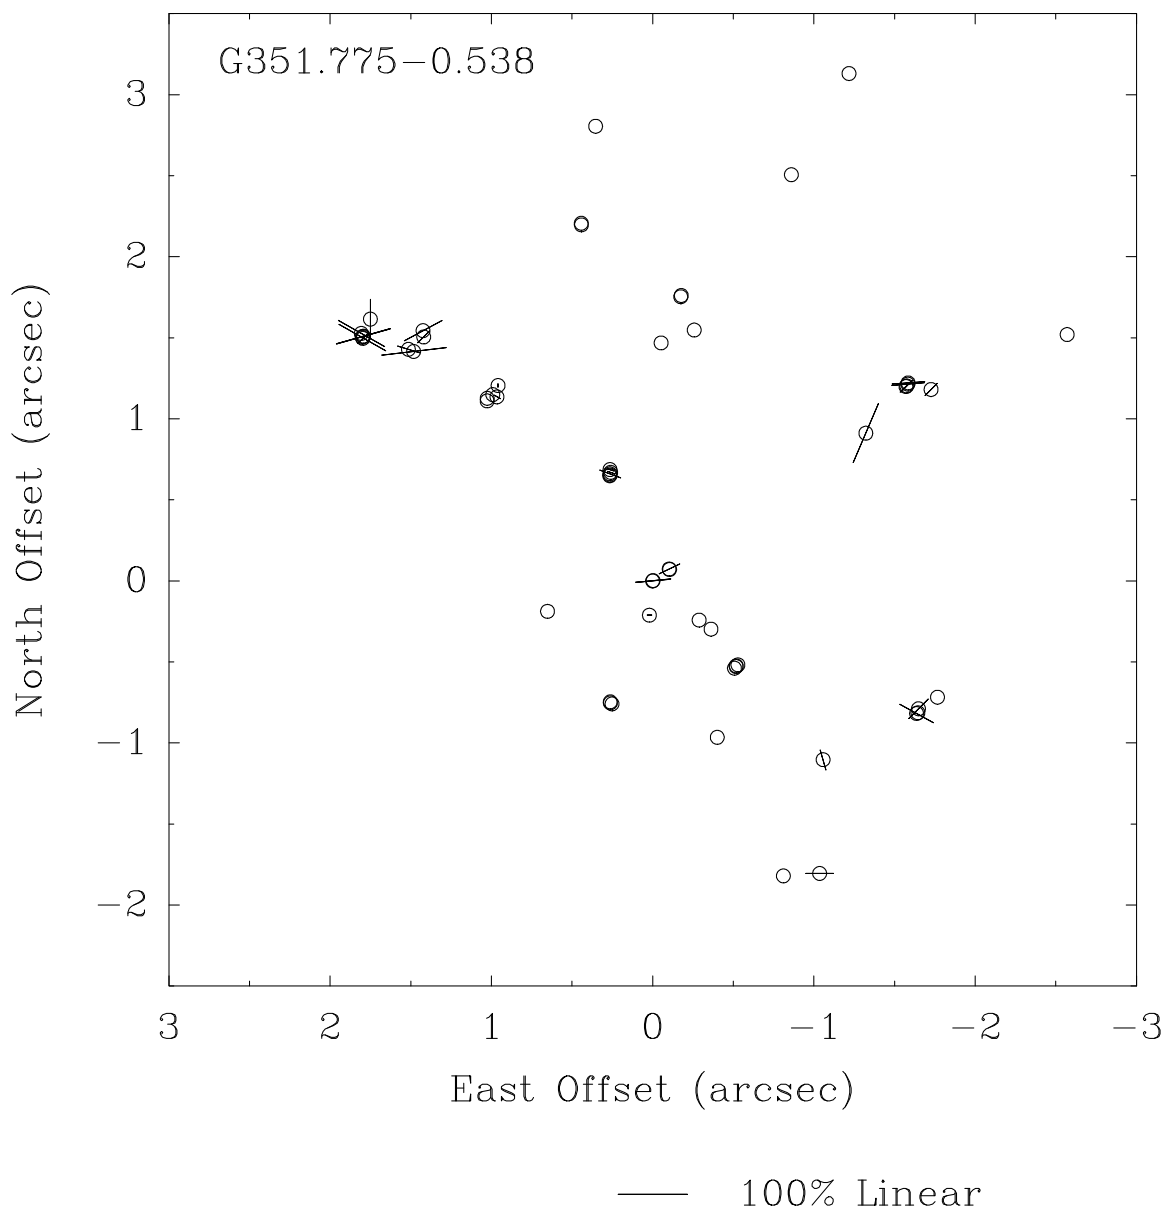


Fig. 39.— Polarization map of G351.775–0.538. Symbols are as in Figure 2. A continuum source to the east is not shown.

Table 2. G5.886–0.393

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 32.32 × 12.77 mas, PA 13°												
-4223.71	-278.37	11.45	0.78		0.25		0.	...	40.28	16.13	9	0.2
-4219.57	-116.11	8.54	0.35		0.58		0.	...	33.82	18.09	15	0.6
-4198.76	-107.11	7.25	0.41		0.35		0.	...	37.21	15.01	15	0.4
-4101.75	-168.22	2.68	...	0.22			0.	...	35.74	15.28	15	0.3
-3973.05	-53.22	3.74	...	0.65			0.	...	33.83	18.49	16	0.7
-3972.31	-54.21	3.71	0.30		0.70		0.	...	37.60	16.04	11	0.7
-3970.74	-333.66	5.67	...		0.28		0.	...	47.06	14.08	14	0.3
-3967.34	-307.14	10.79	0.39		0.65		0.	...	45.52	25.81	23	0.4
-3935.02	-79.50	2.64	0.54	1.49			0.	...	35.24	19.57	9	1.4
-3934.46	-79.67	2.63	0.53		1.72		0.	...	35.16	20.74	15	1.5
-3924.28	-68.48	4.09	...	0.26			0.	...	40.06	17.80	5	0.2
-3909.61	-310.65	2.68	...		0.42		0.	...	40.29	16.70	7	0.4
-3903.97	-440.64	6.97	0.65		0.55		0.	...	35.71	16.98	13	0.6
-3901.46	-289.64	11.21	0.45		0.85		0.	...	35.57	18.84	16	0.8
-3890.06	-326.85	2.86	...	0.63			0.	...	33.98	18.70	6	0.6
-3887.11	-739.10	14.78	0.42	1.96			0.54	12	37.60	24.80	3	1.3
-3887.02	-737.08	14.75	0.36		0.96				37.58	18.26	15	0.9
-3887.01	-734.50	14.81	0.28			0.55			37.33	16.11	16	0.5
-3875.61	-436.36	6.73	...		0.57		0.	...	40.87	18.11	17	0.5
-3864.28	-660.81	13.98	0.48		1.54		0.	...	47.88	24.97	2	0.8
-3852.55	-725.13	14.50	0.58		0.73		0.36	162	47.43	21.65	18	0.5
-3818.78	-724.87	14.29	...	0.75			0.76	0	39.06	24.91	10	0.5
-3810.50	-720.64	14.20	0.41			0.44			35.87	20.02	14	0.4
-3807.42	-723.68	14.17	0.45		0.97		0.73	27	39.10	18.43	16	0.9
-3788.01	-543.00	12.70	...	0.36			0.	...	41.45	18.89	15	0.3
-3787.36	-541.27	13.58	...		2.75		0.	...	41.18	23.94	32	1.8
-3783.05	-535.67	13.41	...		2.59		0.	...	44.14	23.50	40	1.6
-3773.48	-530.53	12.38	0.64	0.74			0.	...	36.45	28.30	11	0.5
-3765.89	-533.58	13.40	0.48		3.15		0.	...	34.42	17.18	17	3.4
-3756.53	-652.25	3.39	...	0.22			0.	...	38.79	18.36	7	0.2
-3751.13	-650.52	5.14	...		0.45		0.	...	34.85	24.25	23	0.3
-3684.98	-715.60	5.79	0.41		0.75		0.45	0	36.88	18.78	14	0.7
-3685.93	-714.00	5.85	...			0.17			40.81	16.04	10	0.2
-3649.63	-489.62	7.61	...		0.26		0.	...	45.13	17.66	21	0.2
-3540.85	-612.20	12.64	0.47		0.78		0.	...	37.81	22.73	24	0.6
-3538.93	-599.75	12.61	0.52	0.89			0.	...	49.09	19.95	14	0.6

Table 2—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. Density (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-3537.24	-620.07	14.46	...		0.46		0.	...	48.62	21.00	176	0.3
-3521.74	-653.90	14.62	0.60		0.70		0.	...	63.61	24.50	5	0.3
-2988.25	-473.77	6.47	0.51	0.46			0.	...	50.21	17.87	16	0.3
-2704.79	9.07	6.55	...		0.22		0.	...	43.24	15.86	6	0.2
-2703.76	13.02	7.25	0.42	2.37			0.	...	37.05	23.75	3	1.7
-474.36	-1166.64	11.82	...		0.56		0.	...	37.83	17.32	11	0.5
-472.17	-1167.17	10.42	...	1.00			0.	...	36.54	19.55	17	0.9
-438.18	-1162.23	10.24	...	0.69			0.	...	41.17	15.62	9	0.7
-103.12	1235.35	12.00	...		0.29		0.	...	33.33	22.04	20	0.3
0.20	0.05	10.93	0.29		5.27		0.79	37	34.18	15.98	16	6.1
-0.16	0.05	10.91	0.28			2.83			35.11	16.01	14	3.2
-0.63	-0.02	10.91	0.28	1.61					34.27	15.54	16	1.9
14.79	1246.79	8.31	...		0.85		0.	...	43.50	22.46	1	0.6
18.17	1236.27	9.19	...	1.03			0.	...	54.85	24.42	159	0.5
25.54	1217.21	8.13	0.29		1.40		0.	...	46.90	24.80	172	0.8
63.93	1221.82	8.66	...		0.86		0.	...	40.77	23.79	0	0.6
64.59	1231.39	9.71	...	0.44			0.	...	43.80	23.80	177	0.3
114.16	1303.90	10.44	0.26	1.94			0.	...	38.89	27.42	178	1.2
114.44	1302.80	9.52	0.30		3.17		0.	...	36.01	27.44	13	2.0
115.14	1238.17	10.42	...	0.50			0.	...	37.98	14.94	9	0.6
117.46	1235.15	9.54	...		1.24		0.	...	60.05	20.51	6	0.6
125.15	1200.44	10.27	0.44	0.34			0.	...	36.31	16.97	17	0.4
1667 MHz — Beam: 32.40 × 12.83 mas, PA 13°												
-3967.82	-843.71	15.83	0.34		0.54		0.	...	34.36	24.15	30	0.4
-3964.68	-844.86	15.69	...	0.33			0.	...	38.37	19.00	13	0.3
-3964.37	-881.44	15.34	...		0.47		0.	...	39.12	17.35	8	0.4
-3962.75	-877.90	15.16	0.36	2.04			0.55	62	41.02	25.34	172	1.3
-3963.56	-874.39	15.14	0.30			0.78			47.08	24.82	178	0.4
-3937.52	-836.87	15.51	...	0.67			0.	...	38.71	33.43	16	0.3
-3887.23	-743.43	14.66	0.50		0.69		0.09	0	35.10	18.94	17	0.7
-3886.58	-739.53	14.66	0.55	3.44			0.08	0	41.56	18.53	9	2.8
-3855.15	-820.52	13.95	0.60		0.76		0.59	81	41.16	19.48	17	0.6
-3854.98	-822.41	13.74	0.61	0.96			0.72	90	37.70	17.04	14	0.9
-3852.98	-821.18	13.75	0.61			0.57			41.46	18.97	17	0.5
-3854.68	-887.97	15.34	...		0.37		0.	...	40.92	17.41	14	0.3
-3853.65	-735.83	15.34	...	0.26			0.	...	46.93	17.25	4	0.2
-3849.94	-664.98	13.97	0.44		1.43		0.	...	35.17	22.41	11	1.2

Table 2—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-3846.68	-728.11	14.49	0.38		1.33		0.53	157	38.03	17.00	12	1.3
-3830.86	-766.76	13.76	0.43		0.89		0.	...	38.17	16.73	13	0.9
-3827.32	-680.12	14.28	...	0.64			0.	...	40.54	22.84	19	0.4
-3825.83	-724.82	14.59	0.41	0.98			0.48	0	43.24	24.28	38	0.6
-3822.12	-718.02	14.81	...		0.64		0.	...	38.36	26.33	12	0.4
-3797.93	-657.66	14.28	...	0.44			0.	...	37.09	18.81	12	0.4
-3784.26	-560.01	13.18	0.63	0.36			0.	...	36.99	24.54	5	0.3
-3764.02	-696.28	11.40	0.53		0.59		0.86	73	37.92	19.24	23	0.5
-3765.71	-697.04	11.47	...			0.47			41.74	20.30	21	0.4
-3765.03	-698.71	11.47	0.36	0.38					35.36	17.22	22	0.4
-3759.89	-535.50	12.65	0.42	0.42			0.	...	33.62	19.02	11	0.4
-3759.55	-491.01	11.88	0.49	0.45			0.	...	36.84	19.58	4	0.4
-3758.15	-537.30	13.34	0.41		3.70		0.	...	38.00	20.45	23	3.0
-3738.60	-512.34	12.70	...	0.41			0.	...	52.65	15.59	11	0.3
-3734.20	-510.55	12.72	0.33		1.00		0.	...	40.58	17.91	13	0.9
-3727.16	-788.14	7.96	...	0.19			0.	...	38.22	15.91	10	0.2
-3718.83	-707.62	4.80	...	0.22			0.	...	38.25	17.91	10	0.2
-3704.87	-755.94	15.69	...		0.19		0.	...	38.16	14.87	20	0.2
-3695.20	-714.13	15.16	...	0.53			0.	...	50.94	18.00	9	0.4
-3681.47	-716.41	5.90	0.60		0.79		0.68	0	39.09	26.09	26	0.5
-3683.45	-714.97	5.85	...			0.28			36.20	19.34	15	0.3
-3641.92	-659.60	7.07	0.61	0.88			0.	...	42.02	23.16	3	0.6
-3621.97	-682.72	7.12	0.75	0.43			0.	...	45.55	22.23	10	0.3
-3514.76	-637.87	14.63	...		0.44		0.	...	41.72	20.50	26	0.3
-3359.09	-884.92	4.88	0.43		1.01		0.	...	39.80	24.37	23	0.7
-3346.47	-876.69	4.45	...	0.48			0.	...	44.14	31.11	31	0.2
-3338.45	-872.53	4.63	...	0.31			0.	...	54.35	19.95	30	0.2
-3336.61	-862.43	5.15	...		0.65		0.	...	36.58	21.06	21	0.5
2.51	-0.89	10.95	...		0.59		0.36	45	35.21	15.77	17	0.7
7.41	-0.68	10.95	...			0.11			42.09	12.45	14	0.1
31.76	1209.68	8.34	0.35		0.59		0.	...	42.05	21.43	171	0.4
38.43	1204.77	8.86	0.40	0.83			0.	...	63.83	26.91	158	0.3
68.45	1220.72	8.84	...		0.57		0.	...	50.48	20.74	0	0.3
74.69	1218.60	9.54	...	0.67			0.	...	58.49	22.78	164	0.3
125.79	1207.47	10.14	0.39	1.44			0.	...	53.39	21.70	170	0.8
127.95	1209.01	9.72	...		1.75		0.	...	58.47	23.01	172	0.8
129.29	1296.34	9.75	0.35		7.42		0.13	112	40.10	27.37	167	4.3
129.83	1301.42	9.72	...			0.27			40.47	16.56	11	0.3
131.02	1295.51	10.27	0.34	6.04			0.	...	39.49	26.27	172	3.7

Table 3. G9.622+0.195

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux Density	(Jy)	(°)		Maj. (mas)	Min. (mas)	PA (°)		
1665 MHz — Beam: 32.90 × 15.31 mas, PA 21°												
-3844.53	11998.26	1.81	0.40	9.56			0.80	114	35.23	23.84	20	7.2
-3844.27	11997.98	1.82	0.38			4.80			35.06	23.90	23	3.7
-3844.15	11998.37	1.83	0.38		2.41				34.15	23.60	23	1.9
-3839.97	12000.33	-1.09	0.52		1.94		0.14	0	35.82	21.77	23	1.6
-3832.74	12007.71	1.18	0.65	7.67			0.33	145	40.89	24.70	32	4.8
-3839.46	12000.60	1.35	0.67			1.29			37.34	22.81	26	0.9
-3819.46	12014.50	-2.52	0.46		0.91		0.	...	36.36	22.88	22	0.7
-3650.40	11915.68	-3.93	0.44		0.49		0.	...	36.41	22.32	21	0.4
-3636.45	12022.05	3.81	...		1.15		0.90	12	34.79	19.95	23	1.1
-3636.80	12021.80	3.81	...			0.86			34.57	22.72	20	0.7
-3636.46	12022.86	3.81	...	0.51					34.12	21.47	25	0.4
-3531.17	12016.92	1.00	...		0.33		0.	...	32.50	23.20	29	0.3
-3351.70	12171.91	2.05	...	0.57			0.	...	32.76	21.07	27	0.5
-3335.50	12176.78	1.41	0.32		7.36		0.71	80	35.68	21.70	24	6.0
-3335.99	12177.01	1.40	0.30			3.19			35.43	22.09	22	2.6
-3335.91	12176.54	1.38	0.28	1.47					36.67	20.40	17	1.2
-3182.87	10961.43	1.77	0.30		8.21		0.25	40	35.33	22.31	22	6.6
-3182.94	10960.77	1.70	...			0.92			35.66	19.71	19	0.8
-3182.04	10961.23	4.87	...	0.69			0.	...	37.56	20.43	12	0.6
-1981.40	6289.69	1.87	0.30		0.68		0.	...	38.38	17.00	18	0.7
-1746.27	6465.30	4.87	...	0.20			0.	...	32.83	17.75	31	0.2
-1604.69	6720.41	5.53	0.38		1.02		0.	...	34.82	19.57	24	1.0
-1574.05	6816.31	3.97	0.49		1.05		0.48	124	36.38	20.90	19	0.9
-1572.32	6816.90	3.83	0.46	1.64			0.59	117	35.90	25.60	16	1.1
-1504.08	6792.22	7.02	0.30		0.51		0.	...	36.69	23.01	36	0.4
-1495.84	6951.42	5.75	...		0.22		0.	...	36.94	16.25	21	0.2
-132.42	813.72	4.87	...	0.30			0.	...	35.68	17.42	16	0.3
-0.40	0.76	5.86	0.47	6.93			0.52	51	34.57	19.79	19	6.4
0.16	0.25	5.84	0.45			2.10			35.21	19.68	19	1.9
-0.23	-0.40	5.87	0.48		0.91				35.60	19.48	20	0.8
1667 MHz — Beam: 32.91 × 15.25 mas, PA 21°												
-3824.96	12000.75	0.55	0.48	2.61			0.23	0	35.08	23.80	21	2.0
-3823.58	12000.54	0.54	0.65			0.35			40.19	22.77	10	0.2
-3819.86	12001.15	-1.63	...		0.74		0.	...	35.62	23.15	30	0.6
-3537.17	11991.13	1.00	0.28	0.81			0.86	27	36.67	23.46	21	0.6
-3536.80	11992.25	0.99	0.36		0.78				35.97	22.94	18	0.6
-3536.07	11991.18	0.99	0.34			0.73			35.58	25.00	24	0.5

Table 3—Continued

$\Delta\theta_x$	$\Delta\theta_y$	Velocity	Δv	RCP	LCP	Lin.	m_L	PPA	Spot Fit Parameters			
									Maj.	Min.	PA	T_B
(mas)	(mas)	(km s ⁻¹)	(km s ⁻¹)	Flux	Density	(Jy)		(°)	(mas)	(mas)	(°)	(10 ⁹ K)
-3348.80	12159.82	2.09	0.38	1.26			0.	...	35.67	21.05	18	1.1
-3329.87	12159.39	1.51	0.43		12.63		0.51	80	35.95	24.39	21	9.2
-3330.73	12157.75	1.44	0.35			4.16			36.20	26.75	20	2.8
-3332.21	12155.84	1.47	0.48	2.45					35.81	27.14	21	1.6
-3178.01	10949.50	2.43	0.43		0.73		0.	...	35.25	26.86	11	0.5
-3081.97	10918.39	0.65	...		0.22		0.	...	36.05	22.59	35	0.2
-2161.16	6956.29	2.23	...	0.17			0.	...	35.72	19.37	18	0.2
-2082.37	6278.63	6.27	...		0.28		0.	...	35.54	19.73	24	0.3
-1932.20	6360.49	1.00	...		0.26		0.	...	36.62	19.21	20	0.2
-1647.25	6719.48	5.98	0.29		0.89		0.55	152	33.34	20.20	25	0.8
-1648.40	6718.58	5.92	...			0.32			41.01	19.75	15	0.2
-1575.25	6814.44	3.89	0.60	0.82			0.40	45	35.68	23.86	10	0.6
-1581.35	6816.18	3.83	0.40			0.27			41.17	20.66	20	0.2
-1574.90	6806.97	4.00	0.78		0.56		0.58	170	42.65	22.48	4	0.4
-1561.24	6803.55	4.31	0.43	2.83			0.40	164	34.84	22.63	17	2.3
-1559.43	6802.80	4.34	0.36			0.56			33.19	19.34	20	0.6
-1559.61	6803.67	4.78	0.40		1.10		0.54	122	34.98	20.61	18	1.0
-1499.69	6773.51	7.13	0.34		5.76		0.57	34	38.09	20.81	24	4.6
-1498.76	6774.74	7.14	0.36			2.06			38.94	20.38	21	1.6
-1498.46	6773.90	7.14	0.38	1.33					38.16	19.83	21	1.1
-1443.70	7017.45	5.21	...		0.19		0.	...	43.38	17.83	11	0.2
-1442.63	7027.35	4.95	0.38	0.54			0.	...	33.88	19.09	19	0.5

Table 4. G10.624–0.385

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux Density		(Jy)			Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 46.53 × 21.59 mas, PA 19 $^\circ$												
-500.59	846.57	3.22	...	0.19			0.	...	52.55	26.82	31	0.1
-23.83	56.22	-0.62	0.36		8.01		0.39	6	58.12	35.09	16	2.5
-23.03	57.05	-0.57	0.35			1.28			50.45	33.05	18	0.5
-4.63	4.55	0.03	0.36		3.04		0.26	103	49.52	31.76	29	1.2
-6.48	3.58	0.05	...			0.33			48.24	26.85	18	0.1
-1.82	46.15	0.38	0.34		0.77		0.89	90	49.22	28.12	19	0.4
0.74	49.35	0.41	...			0.47			49.59	28.00	23	0.2
-0.44	0.53	-2.33	0.37	35.39			0.85	78	50.95	36.18	23	12.2
3.15	-3.29	-2.30	0.35			18.33			51.15	33.18	27	6.9
3.52	-3.61	-2.28	0.34		11.09				51.55	32.35	29	4.2
78.56	-116.06	0.20	0.46		0.26		0.	...	49.38	25.27	13	0.1
88.78	-42.34	-1.35	...	0.59			0.45	45	50.64	35.35	25	0.2
2028.74	-63.68	2.69	...		0.28		0.	...	55.19	25.87	11	0.1
1667 MHz — Beam: 46.48 × 21.57 mas, PA 19 $^\circ$												
-9.59	6.80	-0.57	0.36		25.76		0.13	107	49.88	33.44	25	9.8
-7.78	4.52	-0.56	0.35			1.62			48.25	32.18	24	0.7
-9.42	6.29	-1.97	0.30	26.13			0.54	83	49.73	33.33	25	10.0
-9.32	5.88	-1.96	0.29			7.02			49.90	33.42	25	2.7
-9.52	5.73	-1.96	0.35		2.01				48.22	32.53	24	0.8
21.01	-49.12	-0.81	0.29		3.47		0.56	51	49.18	31.43	30	1.4
20.90	-51.37	-0.78	0.27			1.02			50.28	29.28	35	0.4
2025.07	-75.82	0.05	...	0.41			0.	...	58.09	27.35	14	0.2
2027.01	-76.97	2.16	...		0.45		0.	...	49.18	28.26	22	0.2
2105.18	-132.53	0.23	...	0.52			0.	...	47.33	29.94	17	0.2

Table 5. G34.257+0.154

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux Density	Flux Density	(Jy)		(°)	Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 19.03 × 8.36 mas, PA 170°												
-1575.41	2635.68	62.72	0.29		0.81		0.	...	18.76	8.83	171	3.1
-1573.48	2635.98	60.29	...	0.23			0.	...	18.22	8.81	172	0.9
-1248.78	2243.07	60.64	...	0.19			0.	...	19.16	9.19	167	0.7
-995.45	-1538.10	54.66	...		0.08		0.66	167	15.68	10.47	179	0.3
-992.48	-1539.72	55.83	0.34	0.18			0.	...	17.83	8.88	171	0.7
-986.10	-1538.67	55.60	0.34		0.83		0.11	18	18.42	8.83	172	3.2
-984.95	-1538.90	55.54	...			0.05			19.29	10.07	171	0.1
-812.38	-1369.99	58.00	...		0.09		0.	...	18.13	8.50	167	0.4
-797.22	-1633.78	57.30	0.27	0.56			0.62	59	19.51	15.87	179	1.2
-797.86	-1634.71	57.30	...			0.18			19.72	12.58	173	0.4
-796.28	-1633.46	57.30	...		0.12				17.59	14.00	3	0.3
-780.27	-1633.18	57.47	...	0.33			0.66	167	20.06	16.86	156	0.6
-779.14	-1631.57	57.30	...		0.17				22.96	13.86	172	0.3
-781.31	-1631.46	57.30	...			0.13			17.77	12.04	159	0.4
-569.55	-1480.43	55.71	...		0.24		0.79	120	22.49	13.86	13	0.5
-571.38	-1478.87	55.71	...			0.17			25.50	14.08	9	0.3
-569.63	-1475.28	55.89	...	0.13					20.66	14.01	10	0.3
-544.18	-1407.60	55.54	...		0.16		0.78	135	20.22	9.60	171	0.5
-543.55	-1408.38	55.54	...	0.16					20.11	10.02	170	0.5
-543.21	-1407.74	55.54	...			0.12			19.54	9.73	169	0.4
-386.20	823.92	51.85	...		0.12		0.	...	18.57	9.38	171	0.4
-385.44	1284.18	53.96	...		0.30		0.	...	19.88	9.31	169	1.0
-380.10	1276.71	51.58	0.38	0.43			0.	...	18.94	8.76	169	1.6
-377.38	-688.46	54.31	...	0.07			0.	...	17.02	8.96	170	0.3
-368.69	-649.49	55.74	0.46	0.42			0.	...	20.58	10.33	173	1.2
-307.53	-1258.79	59.76	...	0.13			0.	...	18.78	9.06	173	0.5
-288.55	-833.96	57.47	...	0.27			0.	...	20.20	16.90	160	0.5
-287.03	-1238.50	60.87	0.41	0.18			0.	...	19.18	10.78	171	0.5
-272.47	-1234.43	60.96	0.31	0.22			0.	...	18.69	9.24	173	0.8
-259.21	-1232.69	60.84	0.40	0.35			0.	...	19.65	10.48	171	1.1
-253.97	-704.65	56.50	0.29	2.23			0.04	90	19.61	10.51	177	6.9
-253.16	-702.63	56.59	...			0.05			17.47	9.36	177	0.2
-46.06	-1080.46	54.31	0.32	0.35			0.48	152	18.50	10.55	169	1.1
-46.23	-1080.47	54.29	0.32			0.09			16.67	10.23	169	0.4
-37.90	-1081.48	54.75	0.44		0.17		0.60	0	18.27	11.75	170	0.5
-38.10	-1081.56	54.66	...			0.05			15.24	10.23	173	0.2
-33.62	63.00	58.03	0.40	1.65			0.73	21	22.38	9.84	168	4.8
-33.54	63.67	58.01	0.40		1.29				24.34	10.22	172	3.3
-33.94	64.27	58.00	0.39			0.95			21.16	9.51	165	3.1

Table 5—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-23.26	31.40	57.73	0.35	0.53			0.56	20	21.22	9.34	165	1.7
-17.27	28.69	58.03	0.30		1.85		0.91	142	23.26	9.97	165	5.1
-17.27	28.84	58.00	...			1.19			21.57	9.29	167	3.9
-16.77	115.34	59.41	...		0.20		0.	...	23.60	8.61	167	0.6
-2.78	3.42	61.16	0.40		1.87		0.39	9	21.09	8.91	165	6.3
-2.77	2.76	61.16	0.45			0.41			21.06	8.78	166	1.4
-2.77	60.14	58.39	0.25	12.79			0.70	107	24.57	8.84	167	37.4
-2.97	61.02	58.39	0.25			5.17			23.48	8.78	167	16.0
-2.82	60.58	58.38	0.25		2.52				24.04	8.88	167	7.5
0.45	0.00	58.17	0.29	35.59			0.70	159	20.45	9.26	170	119.5
0.71	-0.53	58.16	0.28			14.77			19.86	8.85	169	53.5
0.49	0.08	58.15	0.27		10.15				20.60	9.09	169	34.5
6.37	-1087.55	55.19	...		0.15		0.	...	18.34	13.96	10	0.4
6.92	-532.86	58.18	0.28	3.42			0.49	176	25.07	9.52	166	9.1
6.76	-532.88	58.19	0.35		0.85				23.10	10.33	168	2.3
11.21	2.75	58.00	...	9.26			0.58	169	27.25	9.79	160	22.1
10.67	3.84	58.00	...			3.23			28.12	10.88	150	6.9
13.89	15.49	61.52	...		1.71		0.38	174	27.62	10.24	163	3.8
12.08	10.20	61.41	0.57			0.46			26.32	13.87	165	0.8
21.74	-1064.03	55.89	...		1.40		0.10	112	19.16	9.51	174	4.9
23.95	-60.09	58.26	0.45	28.00			0.61	45	23.22	10.99	165	69.7
23.14	-60.87	58.23	0.29			8.09			24.54	9.09	164	23.1
22.79	-59.15	58.19	0.33		3.16				24.28	9.72	163	8.5
24.37	-7.77	58.31	0.23	11.61			0.67	128	36.54	8.83	165	22.9
24.49	-7.66	58.31	0.24			4.05			32.66	9.45	161	8.6
24.77	-10.02	58.35	...		1.57				35.31	8.85	166	3.2
26.73	-1045.46	55.71	0.32		2.03		0.10	135	18.70	10.08	172	6.8
26.41	-1047.48	55.71	0.37			0.15			20.06	10.09	175	0.5
41.55	-1036.85	55.94	0.54		0.76		0.46	112	33.79	15.02	1	1.0
42.65	-39.24	61.64	0.26		0.97		0.15	135	20.45	10.50	173	2.9
43.19	-38.58	61.69	...			0.05			15.65	9.77	178	0.2
61.65	2006.56	58.96	0.36		2.79		0.78	30	19.02	9.00	172	10.3
61.25	2006.37	59.00	0.36			1.66			18.92	8.96	172	6.2
61.17	2006.14	59.04	0.38	1.28					18.80	8.53	171	5.1
93.63	1980.47	62.75	...	0.05			0.	...	14.05	8.84	174	0.2
95.65	1977.55	59.95	0.29		1.09		0.51	173	18.85	8.85	170	4.2
96.36	1977.48	59.95	0.27			0.27			18.41	8.71	171	1.2
96.31	1977.66	59.93	...	0.14					20.24	8.29	173	0.5
105.63	2203.06	56.51	0.36	0.36			0.	...	17.82	8.82	173	1.5
108.42	1950.39	62.39	...	0.05			0.	...	20.60	10.25	13	0.2

Table 5—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin. Flux Density (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
312.13	2105.68	58.18	...		0.40		0.78	90	23.08	16.14	32	0.7
308.97	2102.58	58.35	...			0.30			18.80	16.11	16	0.6
343.19	2112.15	58.50	0.34		8.33		0.84	144	18.97	9.73	173	28.7
343.44	2112.07	58.48	0.34	6.66					18.74	9.53	173	23.7
343.39	2112.14	58.50	0.34			6.05			18.93	9.26	171	21.9
361.73	1948.72	60.58	0.27	0.84			0.95	3	19.11	8.65	171	3.2
361.66	1948.87	60.56	0.28			0.71			18.95	8.79	171	2.7
361.71	1949.10	60.54	0.29		0.70				18.90	8.77	172	2.7
372.92	1867.64	59.58	...	0.20			0.	...	17.41	10.71	171	0.7
401.35	1807.51	59.59	0.37	6.10			0.09	0	19.02	10.30	171	19.8
401.09	1807.04	59.63	0.39			0.27			18.77	10.14	173	0.9
402.61	1808.54	56.42	0.53		0.15		0.	...	18.62	10.48	174	0.5
412.84	1813.46	59.23	...	0.20			0.	...	17.87	9.28	171	0.8
424.97	1816.90	55.54	...		0.36		0.	...	18.52	8.43	170	1.5
425.30	1816.93	58.67	0.27	0.59			0.	...	18.53	8.25	169	2.5
461.83	1821.28	59.21	0.32	0.75			0.	...	18.91	9.36	172	2.7
462.01	1821.36	55.95	0.33		3.95		0.	...	19.04	10.17	174	13.0
489.56	1845.01	55.54	...		0.24		0.	...	17.57	9.72	174	0.9
499.32	1851.51	55.71	...		0.96		0.	...	17.93	9.37	177	3.6
500.83	1852.41	58.88	...	0.43			0.	...	18.11	11.45	178	1.3
530.28	1864.74	55.71	...		0.53		0.70	36	17.19	10.14	168	1.9
533.83	1971.95	59.25	0.27		2.01		0.76	91	18.75	8.86	172	7.7
552.07	1870.03	59.20	0.45	9.36			0.28	153	18.68	9.09	171	35.0
551.95	1869.99	59.22	0.44			1.35			18.96	9.12	170	4.9
552.31	1869.93	59.23	0.45		0.24				18.84	9.89	171	0.8
552.32	1869.66	55.94	0.35		27.99		0.03	36	18.84	9.00	171	104.9
552.14	1869.00	55.93	0.36			0.46			18.92	8.71	170	1.8
587.38	2514.75	64.40	0.54		0.20		0.	...	18.39	8.14	173	0.9
587.57	2514.56	59.83	0.40	0.85			0.08	90	18.52	8.36	171	3.5
862.78	2563.98	61.16	...		0.11		0.	...	18.06	8.52	173	0.5
1667 MHz — Beam: 19.02 × 8.32 mas, PA 170°												
-1575.04	2635.08	62.30	0.31		0.77		0.	...	18.66	9.01	171	2.9
-1574.17	2634.87	60.84	0.36	0.27			0.	...	18.75	8.83	169	1.0
-986.12	-1538.70	55.89	...		0.13		0.	...	18.81	8.95	171	0.5
-986.11	-1540.31	56.42	...	0.05			0.	...	15.04	9.38	0	0.2
-811.48	-1639.46	57.47	0.29	6.69			0.75	60	22.47	10.30	172	18.4
-811.77	-1640.11	57.56	0.27		5.23				21.50	10.32	173	15.0
-811.57	-1639.63	57.52	0.28			4.12			21.06	10.24	169	12.2

Table 5—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP LCP		Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux	Density				Maj. (mas)	Min. (mas)	PA (°)	
-796.05	-1636.16	57.36	0.28	2.79			0.65	62	21.92	11.81	178	6.8
-795.29	-1638.95	57.44	0.27		2.07				23.79	13.27	2	4.2
-794.22	-1637.63	57.40	0.31			1.35			22.17	11.49	162	3.5
-790.53	-1660.57	57.65	...	0.54			0.64	64	27.07	16.18	170	0.8
-786.54	-1656.13	58.04	0.37		0.82		0.64	106	20.38	13.51	169	1.9
-789.18	-1656.29	57.99	0.31			0.35			20.49	10.99	174	1.2
-783.71	-1633.67	57.42	0.28	3.49			0.57	168	20.65	16.09	175	6.7
-782.70	-1633.95	57.42	0.31		2.06				24.20	14.92	7	3.6
-783.72	-1632.65	57.42	0.28			1.05			19.57	11.92	160	2.9
-605.75	-1626.90	57.82	...		0.49		0.86	164	23.84	13.45	160	1.0
-606.21	-1627.13	57.82	...	0.35					22.39	13.40	153	0.7
-384.01	1270.65	54.34	0.33		0.12		0.	...	17.50	9.52	174	0.5
-383.22	1278.99	53.46	0.46		0.19		0.	...	21.50	9.20	161	0.6
-381.62	1275.84	52.04	0.42	0.28			0.	...	20.37	8.51	170	1.0
-36.41	69.74	58.56	0.30		14.25		0.48	20	21.88	8.96	170	46.2
-33.13	69.72	58.41	0.32	14.16					29.57	12.50	177	24.4
-35.51	66.96	58.47	0.30			5.43			25.64	8.86	166	15.3
-19.01	104.21	59.18	0.35		2.06		0.21	122	27.43	9.43	171	5.1
-22.35	99.77	59.23	...			0.24			23.91	13.38	5	0.4
-14.01	36.22	58.67	0.38		24.71		0.71	145	26.64	10.06	171	58.6
-13.74	30.04	58.64	0.29			9.83			27.08	9.09	174	25.6
-12.34	18.15	58.52	0.30	39.83			0.30	135	35.20	9.79	162	73.5
-12.45	17.02	58.57	0.24			24.05			32.18	9.07	160	52.4
-8.20	8.80	58.72	0.36		85.18		0.77	146	20.81	8.77	169	296.7
-7.86	8.47	58.68	0.35			39.10			21.22	8.82	167	134.0
-6.82	7.97	58.69	0.30	24.78					20.36	9.28	167	83.4
-6.05	7.77	60.63	0.35		1.59		0.30	163	19.90	8.77	168	5.8
-3.91	59.65	58.94	0.25		40.53		0.21	163	23.10	8.76	169	127.3
-3.85	61.62	59.05	...			5.12			23.43	8.85	168	15.7
-3.67	60.97	59.05	...	1.08					24.29	8.70	168	3.2
4.74	11.67	60.46	...		0.27		0.53	135	23.41	10.26	168	0.7

Table 6. G35.577–0.029

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ^{−1})	Δv (km s ^{−1})	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			
									Maj. (mas)	Min. (mas)	PA (°)	T_B (10 ⁹ K)
1665 MHz — Beam: 17.00 × 10.32 mas, PA 177°												
-126.37	281.26	48.21	0.30	2.58			0.	...	24.21	17.02	173	4.0
-87.29	195.98	48.82	0.32		23.36		0.91	11	24.33	20.34	175	30.0
-87.13	195.96	48.77	0.32			15.49			25.28	19.62	172	19.9
-87.49	195.95	48.79	0.29	9.59					23.92	18.43	172	13.8
-69.96	150.71	48.59	...		3.74		0.92	94	23.95	18.31	174	5.4
-71.83	150.66	48.59	...			2.89			24.62	18.61	4	4.0
-71.75	152.12	48.59	...	1.86					21.68	15.99	174	3.4
-68.60	149.86	44.90	...	0.23			0.	...	21.63	12.83	2	0.5
-49.01	16.03	49.91	0.35		5.58		0.20	45	25.45	20.18	2	6.9
-48.23	16.84	49.87	0.29			0.41			23.79	15.83	4	0.7
-33.00	16.46	47.54	...	0.30			0.	...	32.17	12.54	14	0.5
-16.44	-21.74	50.77	0.33		9.53		0.30	45	25.13	19.56	179	12.3
-16.65	-21.42	50.76	0.32			1.25			23.01	18.07	173	1.9
-10.71	166.63	49.01	0.33		24.26		0.81	124	23.48	18.75	4	35.0
-10.34	166.70	49.02	0.34	21.39					23.65	16.89	177	34.0
-10.80	167.47	49.01	0.32			19.15			24.00	18.86	177	26.9
-3.86	5.86	49.04	0.25	27.11			0.65	169	23.07	17.68	1	42.3
-3.64	5.55	49.04	0.23			11.27			24.23	19.62	177	15.2
-2.76	5.84	51.87	0.27		4.26		0.14	90	25.39	21.96	6	4.9
657.37	-37.99	52.62	0.39		3.96		0.	...	25.29	21.27	177	4.7
1667 MHz — Beam: 16.98 × 10.27 mas, PA 176°												
-130.82	287.36	48.43	0.42	0.56			0.	...	24.53	14.13	11	1.0
-120.42	264.73	48.29	0.30		0.42		0.	...	20.39	16.13	173	0.8
-19.65	-21.67	50.29	0.32		11.87		0.27	60	22.99	18.22	173	18.0
-19.43	-21.82	50.27	0.34			1.69			22.67	17.51	168	2.7
-18.73	-23.07	50.26	0.41	0.33					27.16	15.24	145	0.5
-12.59	-27.90	50.35	...		3.16		0.	...	52.46	14.45	7	2.6

Table 7. G40.622–0.137

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 23.38 × 15.76 mas, PA 41 $^\circ$												
-731.39	-140.54	34.18	0.37		2.02		0.12	90	31.28	25.61	63	1.6
-727.64	-139.62	34.04	0.31	3.53			0.	...	33.03	24.77	63	2.7
-704.36	198.78	34.72	...	0.68			0.	...	30.02	23.26	51	0.6
-700.09	200.94	35.76	0.29	1.56			0.	...	30.34	22.96	47	1.4
-695.11	99.43	34.37	...		1.06		0.	...	34.28	27.05	3	0.7
-693.14	297.48	34.54	...		0.75		0.	...	29.68	23.66	47	0.7
-683.32	223.20	34.37	...	0.35			0.	...	29.17	21.10	38	0.4
-668.53	79.32	32.22	0.67	2.45			0.	...	29.27	23.41	61	2.3
-667.51	78.19	32.26	...		1.00		0.	...	29.49	21.97	66	1.0
-550.89	-274.50	35.07	...		0.30		0.	...	30.86	21.32	52	0.3
-394.46	208.11	28.74	...	0.47			0.	...	29.80	22.44	44	0.4
-356.92	106.24	25.75	...		0.44		0.	...	31.16	23.43	32	0.4
-300.05	35.02	25.58	...		0.59		0.	...	30.31	26.18	3	0.5
-0.76	-1.12	32.58	0.35		163.39		0.46	117	36.52	26.19	48	108.6
-0.66	0.09	32.64	0.41	63.72					33.86	25.30	50	47.3
-0.97	-0.78	32.62	0.36			36.00			29.52	21.80	44	35.7
0.03	0.93	29.09	...	2.09			0.	...	33.05	24.62	51	1.6
8.49	124.30	31.55	0.36		0.99		0.	...	32.99	24.07	49	0.8
75.53	124.80	30.09	0.31	1.53			0.	...	32.75	23.61	51	1.3
89.23	208.54	28.74	0.50	0.85			0.	...	32.80	22.11	42	0.7
132.94	421.53	29.70	0.68		4.77		0.	...	36.01	26.88	56	3.1
1667 MHz — Beam: 23.37 × 15.74 mas, PA 41 $^\circ$												
-672.97	325.08	36.12	...	0.68			0.	...	30.65	24.66	59	0.6
-669.22	321.13	35.42	...	0.50			0.	...	30.24	24.07	53	0.4
-670.13	323.94	35.57	0.28		0.99		0.	...	34.73	26.37	19	0.7
-667.39	80.31	31.66	0.44	1.63			0.	...	30.16	25.03	63	1.4
-392.00	210.98	28.92	...	1.04			0.	...	32.06	23.64	59	0.9
-391.35	210.65	29.27	...		0.76		0.	...	32.42	23.91	77	0.6
-309.43	24.37	23.48	...	0.33			0.	...	30.46	20.13	67	0.3
-304.82	32.37	27.46	0.40	4.43			0.	...	31.40	25.90	56	3.5
-304.65	35.24	28.04	0.42		1.45		0.	...	33.39	27.17	29	1.0
-304.25	24.59	26.82	0.37	1.42			0.	...	35.77	23.90	55	1.1
-301.54	36.47	24.88	...	0.32			0.	...	30.68	20.54	43	0.3
-300.78	103.36	26.64	...	0.38			0.	...	25.74	21.16	35	0.4

Table 7—Continued

Spot Fit Parameters												
$\Delta\theta_x$	$\Delta\theta_y$	Velocity	Δv	RCP	LCP	Lin.	m_L	PPA	Maj.	Min.	PA	T_B
(mas)	(mas)	(km s ⁻¹)	(km s ⁻¹)	Flux Density (Jy)				(°)	(mas)	(mas)	(°)	(10 ⁹ K)
-300.67	36.05	25.38	0.51		4.14		0.	...	32.76	25.30	57	3.2
-296.49	36.43	27.00	0.40		3.81		0.	...	34.00	26.44	62	2.7
-174.46	82.74	25.93	...	0.22			0.	...	26.55	19.18	24	0.3
-0.90	-0.58	29.80	...	0.64			0.	...	31.14	22.23	40	0.6
-0.69	0.04	31.98	0.33		18.54		0.12	135	35.22	24.85	53	13.5
-0.49	-0.68	31.96	0.28			1.10			33.23	25.11	49	0.8
-2.49	-0.46	31.90	...	0.26					33.24	23.23	70	0.2
28.27	160.64	31.55	...		0.27		0.	...	31.17	19.60	44	0.3
80.16	130.76	30.78	0.35	2.15			0.39	104	38.64	24.72	44	1.4
77.44	124.55	30.91	0.31		2.09				34.81	22.62	54	1.7
75.68	125.43	30.86	0.35			0.68			30.73	23.62	44	0.6
108.47	295.69	32.26	...		1.61		0.	...	30.21	22.44	58	1.5

Table 8. G43.796–0.127

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA ($^\circ$)	Spot Fit Parameters			
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	T_B (10 ⁹ K)
1665 MHz — Beam: 17.51 × 15.09 mas, PA 11 $^\circ$												
-641.80	43.53	43.41	...		0.56		0.14	0	25.56	17.06	173	0.8
-643.78	45.22	43.43	0.29	0.41					23.76	15.76	167	0.7
-636.52	14.21	43.68	0.35		1.72		0.20	45	22.91	16.60	15	2.9
-635.81	10.71	43.73	0.31	1.03					20.17	17.32	173	1.9
-635.71	11.52	43.78	0.24			0.21			18.36	15.50	14	0.5
-632.17	-64.08	44.46	...		0.21		0.	...	20.54	16.64	23	0.4
-630.07	-218.08	47.80	...		0.16		0.	...	18.47	16.34	59	0.3
-629.25	-66.83	46.04	...	0.29			0.	...	19.80	15.27	177	0.6
-612.35	-51.84	45.34	...		0.15		0.	...	16.22	15.54	102	0.4
-609.00	272.86	41.65	...	0.64			0.	...	17.90	17.19	137	1.3
-602.76	386.45	41.99	0.28		4.75		0.20	0	20.03	16.91	19	8.9
-598.31	354.84	40.17	0.29	1.78			0.	...	19.30	16.49	5	3.6
-597.94	354.79	41.70	0.35		6.11		0.51	56	18.41	16.29	28	13.0
-598.50	354.62	41.68	0.31			1.41			18.94	16.15	13	2.9
-595.04	-9.36	43.45	0.36		1.74		0.	...	21.23	17.70	12	2.9
-586.70	-30.87	43.70	0.37		0.96		0.	...	19.94	16.96	6	1.8
-572.92	1.55	42.18	...		0.23		0.	...	17.98	16.10	34	0.5
-572.62	-64.84	43.93	...		0.19		0.	...	19.87	17.69	171	0.4
-568.76	-40.74	42.62	0.57		1.06		0.	...	25.54	16.16	5	1.6
-398.80	570.36	39.01	...		0.12		0.	...	19.58	16.67	6	0.2
-397.34	566.10	39.76	0.69	0.16			0.	...	18.53	15.00	20	0.4
-394.79	645.12	40.59	...	0.19			0.	...	17.80	15.08	17	0.4
-393.31	618.26	42.51	0.38	0.35			0.52	45	18.23	15.73	0	0.8
-392.82	644.02	37.96	...		0.10		0.	...	18.14	16.78	14	0.2
-340.94	286.77	40.88	0.34	2.40			0.39	90	22.70	18.95	34	3.5
-338.44	286.14	40.95	...			0.35			20.64	15.73	31	0.7
-246.25	422.90	45.35	0.29		0.39		0.70	0	20.87	17.10	178	0.7
-244.73	423.57	45.34	...			0.10			17.05	14.81	9	0.2
-148.23	454.98	44.64	...	0.25			0.	...	17.71	15.87	21	0.6
-54.04	165.29	43.76	0.36	3.28			0.15	17	28.88	19.06	80	3.8
-52.89	165.14	43.82	0.35		2.86				28.40	19.98	72	3.2
-50.96	165.83	43.76	...			0.33			23.53	17.96	87	0.5
-37.45	199.71	44.48	0.36		2.15		0.43	158	19.41	16.92	18	4.2
-37.82	199.68	44.32	0.31			0.90			18.41	16.57	4	1.9
-36.35	272.77	41.47	...	1.03			0.73	90	20.84	15.80	38	2.0
-35.30	196.36	44.11	...	1.17			0.83	177	26.02	16.97	140	1.7

Table 8—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-14.65	446.02	43.93	...	0.21			0.	...	23.90	15.90	56	0.3
-10.75	191.58	44.93	0.39		1.99		0.79	11	19.42	17.00	21	3.8
-10.51	191.49	44.97	0.36			1.19			19.35	16.66	9	2.3
-11.00	192.08	45.03	0.40	1.03					19.77	16.26	6	2.0
-2.21	-70.86	44.29	...		0.16		0.	...	17.22	15.03	16	0.4
0.03	-0.26	41.53	0.33		71.45		0.52	108	19.70	17.19	24	134.1
-0.58	0.11	41.67	0.54	49.36					19.28	16.68	4	97.6
-0.15	-0.22	41.55	0.31			28.25			19.38	16.69	12	55.6
7.40	48.49	40.92	0.27	4.59			0.17	82	19.20	16.45	177	9.2
7.72	49.04	40.95	...		0.86				18.13	15.57	10	1.9
7.66	167.10	44.01	0.29	5.97			0.58	23	18.80	16.59	7	12.2
7.98	166.87	43.99	0.25			2.45			19.12	16.34	16	5.0
7.86	166.99	43.99	0.28		2.45				19.36	16.66	22	4.8
8.28	33.43	39.28	0.35		3.29		0.13	45	24.46	17.18	25	5.0
7.12	31.88	39.36	...			0.10			15.25	12.72	124	0.3
16.13	45.93	39.33	0.39	0.41			0.71	166	19.71	15.56	16	0.8
17.68	47.02	39.34	0.28			0.10			16.62	14.82	5	0.2
16.42	104.83	39.89	...		0.21		0.19	135	17.60	15.42	14	0.5
27.98	242.37	41.61	0.58	2.66			0.63	135	36.82	16.57	123	2.8
45.98	34.62	39.54	...		0.12		0.	...	16.69	13.31	17	0.4
52.20	107.14	41.30	...	5.44			0.43	177	18.38	16.09	11	11.7
52.02	107.54	41.30	...		2.40				19.29	15.81	28	5.0
51.96	107.25	41.30	...			1.70			18.31	16.12	21	3.7
78.45	123.81	41.30	...	7.33			0.16	159	20.53	15.71	179	14.4
77.76	122.36	41.30	...		2.09				20.87	16.36	22	3.9
78.56	124.19	41.30	...			0.64			17.84	15.51	2	1.5
91.99	157.09	38.70	0.40		0.35		0.	...	20.19	17.74	41	0.6
93.31	162.91	41.62	0.30	12.05			0.	...	18.54	15.85	177	26.1
93.44	162.49	41.64	0.31		11.06				18.78	16.68	7	22.4
116.31	288.66	42.85	0.58	2.91			0.09	36	20.47	16.50	4	5.5
114.70	290.42	42.74	0.31			0.20			20.40	15.55	6	0.4
180.36	362.97	41.50	0.50		0.74		0.	...	24.98	15.84	39	1.2
188.72	363.31	41.65	...	0.73			0.	...	20.46	17.00	29	1.3

1667 MHz — Beam: 17.50 × 15.07 mas, PA 11°

-679.43	100.17	43.47	0.38		0.46		0.	...	19.79	16.78	6	0.9
-678.64	138.95	43.05	...		0.15		0.	...	18.76	15.23	4	0.3
-645.90	53.34	43.39	0.35		0.27		0.	...	22.76	16.95	160	0.4
-640.64	46.07	43.40	...	0.37			0.	...	19.49	18.53	173	0.6

Table 8—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-601.80	7.27	41.08	0.36		1.05		0.	...	19.04	16.84	23	2.1
-410.36	16.04	41.82	...	0.12			0.	...	16.86	14.92	9	0.3
-330.91	313.71	40.16	0.29	1.47			0.07	135	20.44	17.57	22	2.6
-146.44	456.91	44.98	...	0.19			0.	...	19.71	17.36	112	0.4
1.27	1.76	41.92	1.38		3.03		0.22	157	19.19	17.04	28	5.9
0.23	0.60	41.89	0.34	0.95					19.29	16.48	34	1.9
0.22	0.53	41.84	0.24			0.45			19.37	16.93	34	0.8
4.58	2.82	43.03	0.55	1.07			0.	...	20.81	17.13	36	1.9
22.00	9.91	42.53	...	0.51			0.	...	20.53	17.95	74	0.9
100.04	164.68	40.24	...	0.20			0.	...	18.64	14.54	6	0.5
102.28	166.84	40.42	...		0.32		0.	...	16.31	15.31	0	0.8
131.88	212.72	41.47	...	0.18			0.	...	18.46	15.36	24	0.4
155.02	333.31	41.95	0.29	0.30			0.	...	19.18	16.70	178	0.6

Table 9. G49.488–0.387 (W51 e1)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin.	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 16.13 $\times$ 9.41 mas, PA 170 $^\circ$												
-1962.45	790.06	61.76	...	0.12			0.	...	16.93	12.15	166	0.4
-1960.92	787.90	62.55	0.65		0.59		0.	...	18.15	13.08	175	1.6
-1939.01	784.02	62.45	0.55		0.47		0.	...	18.72	17.21	138	0.9
-1939.01	783.58	61.76	...	0.22			0.	...	24.81	15.33	126	0.4
-1918.67	831.44	62.34	0.73	0.29			0.	...	19.66	12.38	177	0.8
-1917.78	832.80	63.52	...		0.13		0.	...	17.49	12.91	179	0.4
-1898.82	783.43	61.85	0.79		0.41		0.	...	21.61	19.80	68	0.6
-1893.61	1074.31	60.70	...		1.99		0.	...	18.04	16.60	0	4.2
-1884.64	785.79	61.76	...	0.21			0.	...	22.04	14.20	167	0.4
-1847.71	818.02	60.35	...		0.13		0.	...	15.70	12.71	160	0.4
-1832.31	-406.73	54.02	...	0.31			0.	...	35.18	15.11	50	0.4
-1828.04	-382.21	50.86	0.57		0.22		0.	...	18.21	13.66	166	0.6
-1827.57	-382.77	54.02	...	0.22			0.	...	17.78	13.13	169	0.6
-1823.82	-356.92	49.07	0.66		0.20		0.	...	18.42	13.79	4	0.5
-1823.68	-354.45	52.62	...	0.10			0.	...	20.14	13.67	162	0.2
-1817.13	909.55	57.89	...		0.51		0.	...	23.43	18.75	6	0.7
-1708.04	1058.90	58.24	...		0.59		0.	...	31.75	15.11	148	0.8
-1527.02	1167.14	57.89	...		2.11		0.	...	19.39	12.23	173	5.6
-1526.45	1166.59	57.89	...	1.61				...	19.80	13.20	178	3.9
-629.96	1064.96	56.13	...	0.40			0.	...	19.81	12.50	166	1.0
-626.71	1092.61	56.48	...	0.80			0.	...	18.73	14.00	0	1.9
-571.98	1211.03	55.90	0.49	1.04			0.	...	17.50	11.18	169	3.4
-568.40	1212.03	60.00	...		0.29		0.	...	17.79	11.92	176	0.9
-561.16	1205.57	55.78	...	0.34			0.	...	19.16	12.46	160	0.9
-426.74	-1142.96	61.05	...		0.29		0.	...	20.40	12.10	0	0.7
-426.79	-1142.96	61.05	...	0.17				...	18.23	14.55	162	0.4
-370.32	-1842.75	60.35	...	0.40			0.	...	25.01	15.05	45	0.7
-365.22	-1840.03	57.19	...		1.20		0.	...	19.23	14.55	23	2.7
-351.08	-1819.46	57.57	0.67		0.82		0.	...	17.90	12.60	168	2.3
-345.83	-1817.65	56.48	...		0.86		0.	...	16.70	10.91	170	3.0
-269.55	-1163.65	62.16	0.48	1.54			0.	...	19.96	13.27	170	3.7
-238.12	-1771.26	61.44	0.55	0.39			0.	...	16.65	12.43	169	1.2
-229.60	-1781.19	58.59	...		1.52		0.	...	16.28	12.28	155	4.8
-207.31	-1764.73	62.11	...	0.25			0.	...	17.40	12.06	174	0.8
-135.48	-804.71	62.76	0.76	0.30			0.	...	20.18	14.92	138	0.6

Table 9—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP LCP Lin.			m_L	Spot Fit Parameters				T_B (10 ⁹ K)
				Flux	Density	(Jy)		PPA (°)	Maj. (mas)	Min. (mas)	PA (°)	
-129.52	-803.94	61.41	...		0.94		0.	...	18.89	13.47	161	2.3
-129.05	-803.74	61.41	...	0.84			0.	...	18.95	14.22	150	2.0
-76.56	-42.42	60.05	0.55	1.04			0.	...	20.12	14.75	0	2.2
-74.96	-44.55	60.00	...		0.95			...	18.19	12.04	177	2.8
-54.07	-824.50	60.00	...	0.96			0.	...	18.66	13.33	170	2.5
-4.61	-33.38	60.70	...		1.18		0.	...	17.49	12.32	173	3.5
-3.68	-33.34	60.70	...	0.63				...	20.20	12.71	2	1.6
-2.74	4.06	58.10	0.76	239.46			0.	...	29.80	16.53	156	309.0
-0.73	4.97	58.48	0.84		31.32		0.	...	27.53	13.45	176	53.8
21.43	17.42	58.24	...	8.58			0.02	45	19.87	12.51	161	22.0
23.83	14.82	58.24	...		2.75			...	23.08	10.37	167	7.3
21.69	-9.68	58.84	1.28		40.07		0.01	153	19.86	13.47	167	95.2
23.00	8.24	60.00	...		2.35		0.	...	16.48	11.99	158	7.6
33.90	-46.63	58.95	...	4.34			0.01	135	18.38	14.32	11	10.5
87.48	-16.63	57.54	...		0.79		0.	...	16.67	11.51	173	2.6
127.04	244.75	59.30	...	1.02			0.	...	16.82	13.97	179	2.8
132.25	247.30	61.59	0.53		3.49		0.	...	17.71	12.77	173	9.8
135.10	292.23	61.44	0.51		1.78		0.	...	19.00	11.66	170	5.1
139.90	58.52	57.89	...		3.42		0.	...	18.01	14.79	12	8.2
153.27	-137.59	61.41	...	0.33			0.	...	18.96	12.15	4	0.9
313.52	754.65	64.82	0.54	0.98			0.	...	17.63	12.21	166	2.9
313.38	754.81	64.82	0.54		0.71			...	17.47	12.24	163	2.1
1667 MHz — Beam: 16.13 × 9.41 mas, PA 170°												
-1969.23	786.92	62.81	...	0.26			0.	...	28.92	17.67	120	0.3
-1961.02	782.47	62.60	1.18		0.22			...	17.44	15.22	166	0.5
-1894.43	1073.08	60.70	...		0.35		0.	...	18.87	16.24	171	0.7
-1872.86	802.16	62.11	...		0.20		0.	...	16.35	13.32	155	0.6
-1842.51	797.63	61.05	...	0.10			0.	...	16.74	11.60	144	0.3
-811.68	-225.81	59.27	0.78	0.19			0.	...	19.02	13.66	170	0.5
-567.77	1207.51	59.30	...		0.18		0.	...	18.50	11.83	172	0.5
-567.62	1207.31	56.81	0.66	0.51			0.	...	17.87	11.77	170	1.5
-505.42	-1226.48	62.11	...	0.29			0.	...	19.58	13.27	7	0.7
-431.22	-1154.84	63.86	...	0.09			0.	...	13.05	12.05	15	0.4
-374.51	-1849.37	57.85	0.62		0.18		0.	...	19.20	11.19	170	0.5
-362.31	-1841.80	60.00	...	0.20			0.	...	17.14	13.92	165	0.5
-361.89	-1840.84	57.89	...		0.37		0.	...	18.11	14.63	5	0.9
-215.15	15.43	60.41	0.52		0.86		0.	...	17.57	12.15	174	2.6

Table 9—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux	Density	(Jy)			Maj.	Min.	PA	
(mas)	(mas)	(km s ⁻¹)	(km s ⁻¹)						(mas)	(mas)	(°)	
-116.01	-810.77	61.36	0.57		0.50		0.	...	21.22	15.02	142	1.0
-113.71	-813.89	62.11	...	0.48			0.	...	19.91	13.56	155	1.1
-113.47	-815.30	62.11	...		0.21				17.70	12.48	156	0.6
-16.32	-845.15	60.39	1.05		0.69		0.	...	26.09	18.10	152	0.9
-8.73	-843.46	60.58	1.17	0.22			0.	...	18.66	13.76	5	0.6
60.24	-38.84	61.98	0.46		1.75		0.	...	19.31	14.59	152	3.9
61.06	602.21	54.73	...		0.14		0.	...	22.90	12.96	10	0.3
68.68	-42.42	60.75	0.59	0.42			0.	...	17.52	15.18	166	1.0
93.56	36.32	61.05	...	0.12			0.	...	19.65	15.36	20	0.3
129.37	243.68	60.08	0.54	0.95			0.	...	20.08	15.37	8	2.0
131.84	245.03	61.15	0.57		1.74		0.	...	19.49	13.37	177	4.3
149.64	4.15	61.40	...	0.40			0.	...	28.07	21.01	40	0.4
159.13	7.25	62.46	...		0.43		0.	...	39.51	15.80	58	0.4
159.43	14.45	62.46	...		0.12		0.	...	15.73	13.92	164	0.3
207.47	27.15	63.51	...		0.19		0.	...	18.02	15.62	150	0.4
208.88	26.17	62.81	...	0.50			0.	...	22.55	17.84	162	0.8
216.04	654.78	59.98	0.52		0.69		0.	...	20.44	11.31	172	1.9
349.32	216.86	60.02	0.75		1.50		0.	...	19.17	17.26	82	2.9
348.78	216.38	59.97	0.85	1.28					17.55	17.02	48	2.7
424.16	-366.60	61.76	...	1.06			0.	...	45.79	16.23	8	0.9
442.32	-348.92	62.11	...		2.00		0.	...	18.66	14.95	173	4.6
442.70	-349.64	61.98	0.40	3.98			0.	...	18.01	15.21	170	9.2
443.26	-349.87	62.81	...	0.30			0.	...	18.34	14.83	153	0.7
456.98	-328.73	61.89	0.62		0.90		0.	...	21.17	15.40	174	1.8
458.49	-332.26	62.11	...	1.21			0.	...	23.65	13.77	175	2.4
530.83	-338.92	61.76	...	0.48			0.	...	25.41	22.45	119	0.5
534.12	-352.11	61.26	0.85		0.87		0.	...	31.75	20.71	177	0.8
536.09	-362.35	60.99	1.38	0.61			0.	...	25.26	20.22	60	0.8
536.80	-362.86	60.82	0.69		0.38		0.	...	17.14	14.83	172	0.9
549.60	-322.42	60.69	0.55		0.56		0.	...	27.95	14.51	7	0.9
549.69	-227.91	62.11	...	0.02			0.	...	6.53	5.27	155	0.4
550.13	-327.07	61.05	...	0.34			0.	...	31.44	17.64	8	0.4
560.86	-364.90	60.41	0.88		0.70		0.	...	23.94	18.65	100	1.0
558.20	-365.49	60.43	1.37	0.37					29.34	18.00	88	0.4
565.98	-190.60	61.76	...	0.32			0.	...	16.81	14.00	174	0.9
566.77	-191.22	61.76	...		0.28				18.97	14.29	173	0.7
581.63	-225.04	62.17	0.72	0.83			0.	...	27.60	17.57	11	1.1

Table 10. G49.488–0.387 (W51 e2)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin.	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 16.13 $\times$ 9.41 mas, PA 170 $^\circ$												
-1187.71	5768.25	49.28	0.59		0.41		0.	...	19.93	12.92	172	1.0
-1174.33	5798.76	48.45	0.45		0.64		0.	...	17.02	10.25	170	2.3
-1150.69	5714.90	50.16	...		0.15		0.	...	19.01	10.07	178	0.5
-1116.44	6135.30	50.55	0.49	1.12			0.	...	17.47	10.27	170	4.0
-1094.83	5241.30	56.08	0.89	0.26			0.	...	17.72	12.82	167	0.7
-1086.88	5235.83	54.55	0.70		0.65		0.	...	19.18	13.74	164	1.6
-1084.52	5233.29	56.95	0.68	0.68			0.	...	21.57	13.87	159	1.4
-1072.82	5262.07	59.97	0.95	1.76			0.	...	19.36	11.85	170	4.9
-1072.59	5262.24	57.59	0.89		1.09		0.	...	18.49	12.05	175	3.1
-906.07	5310.63	57.19	...	1.23			0.	...	26.72	13.27	4	2.2
-892.37	6650.27	69.14	...		0.13		0.	...	22.94	12.19	167	0.3
-887.77	5704.83	48.40	...		0.11		0.	...	15.74	13.06	146	0.4
-882.91	5623.59	57.19	...	0.67			0.	...	17.17	10.70	165	2.3
-869.47	5577.59	57.33	0.47		2.38		0.	...	19.17	12.17	8	6.5
-860.81	5639.17	57.19	...	0.25			0.	...	14.70	11.32	165	0.9
-860.72	5587.70	57.47	0.75		4.26		0.	...	17.51	11.05	174	14.0
-860.54	5587.76	60.79	0.69	0.87			0.	...	18.31	10.99	174	2.7
-855.43	5711.43	49.42	0.71		0.32		0.	...	16.16	11.52	172	1.1
-842.84	5662.75	57.89	...	1.95			0.	...	15.69	11.24	177	7.0
-830.11	5658.65	55.79	0.56	0.47			0.	...	16.77	11.45	1	1.5
-782.37	5646.86	58.75	0.66	56.18			0.	...	18.27	14.14	10	138.3
-737.87	5897.68	60.70	...	0.15			0.	...	15.61	13.28	151	0.5
-715.86	5652.25	57.34	0.73	1.86			0.	...	26.71	16.77	152	2.6
-712.97	5680.06	57.89	...	1.01			0.	...	20.00	15.03	20	2.1
-705.11	5660.72	57.29	0.70	1.24			0.	...	23.29	14.21	13	2.4
-701.30	6170.35	51.85	0.57		0.36		0.	...	19.28	10.15	170	1.2
-700.92	6169.66	64.25	0.56	1.08			0.	...	18.25	10.98	171	3.4
-698.81	6200.49	55.87	0.79		0.29		0.	...	16.50	10.83	175	1.0
-698.80	6200.06	67.58	0.61	2.34			0.	...	17.82	10.63	172	7.9
-668.20	6022.07	61.05	...	0.11			0.	...	14.86	9.34	175	0.5
-451.35	6632.12	69.08	0.73		1.11		0.	...	22.03	16.49	2	1.9
-450.50	6630.77	71.65	1.05	1.08			0.	...	24.00	16.91	2	1.7
-448.67	6634.33	69.85	1.15		0.58		0.	...	22.72	14.94	1	1.1
-305.30	6291.85	64.22	...	0.18			0.	...	18.50	11.51	170	0.5
-278.34	6567.53	67.03	...	0.58			0.	...	23.81	13.95	177	1.1

Table 10—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density (Jy)	Lin.	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-238.12	6522.74	67.70	0.60		0.87		0.	...	21.50	15.58	4	1.7
-237.46	6523.25	70.20	...	0.32			0.	...	20.62	14.96	11	0.7
-227.88	6721.05	69.84	...	0.35			0.	...	20.25	14.98	159	0.7
-220.73	6540.84	67.38	...		0.47		0.	...	19.74	15.43	172	1.0
-186.71	5939.90	54.73	...		0.39		0.	...	17.30	10.79	167	1.3
-132.77	6595.01	65.49	0.58	0.69			0.	...	20.25	12.97	178	1.7
-132.82	6594.22	65.63	...		0.18				21.75	11.81	0	0.4
-111.26	6607.80	64.51	0.69	3.73			0.	...	22.38	12.52	2	8.5
-111.50	6608.32	64.50	0.73		1.47				20.78	12.41	2	3.6
-100.95	5882.90	54.02	...		0.53		0.	...	18.71	11.46	166	1.6
-62.92	6344.83	62.46	...		0.19		0.	...	21.17	16.78	60	0.3
-24.85	5487.18	51.56	...		0.91		0.	...	18.55	11.96	166	2.6
-24.82	5487.11	57.19	...	0.45			0.	...	17.86	11.49	170	1.4
39.47	5837.50	52.48	0.57		0.85		0.	...	17.40	11.31	166	2.7
93.82	5716.13	46.68	0.53		0.36		0.	...	18.20	11.78	179	1.1
101.06	5732.59	50.16	...	0.18			0.	...	18.18	15.11	13	0.4
101.61	5732.11	46.60	0.59		1.20		0.	...	19.27	13.91	7	2.9
127.34	5771.07	46.64	...		0.27		0.	...	28.17	14.13	27	0.4
147.53	5803.25	46.60	0.56		0.36		0.	...	17.93	11.44	1	1.1
395.42	5745.37	48.05	...		0.30		0.	...	15.80	11.09	168	1.1

1667 MHz — Beam: 16.13 × 9.41 mas, PA 170°

-1096.86	5274.00	60.30	0.57		0.86		0.	...	19.99	13.13	1	2.1
-1096.37	5273.50	61.76	0.61	0.83			0.	...	20.96	13.54	6	1.8
-1086.47	5315.68	61.05	1.02	1.81			0.	...	18.72	11.62	177	5.3
-1086.30	5315.65	59.52	1.05		1.88		0.	...	18.64	11.52	175	5.6
-1082.37	5306.58	63.32	1.19	0.52			0.	...	19.09	11.84	175	1.5
-1082.21	5308.19	61.93	1.19		0.59		0.	...	17.73	11.43	176	1.9
-1070.32	5260.63	60.00	...	0.14			0.	...	18.35	13.83	20	0.3
-1069.43	5261.93	58.60	...		0.19		0.	...	18.59	12.73	162	0.5
-1039.06	5355.93	60.63	0.85		0.27		0.	...	26.46	11.57	1	0.6
-1036.95	5357.07	62.11	...	0.24			0.	...	23.06	13.31	14	0.5
-1011.76	5348.27	60.82	0.75		0.34		0.	...	23.28	15.15	143	0.6
-1010.07	5347.13	62.46	...	0.32			0.	...	21.63	13.62	158	0.7
-891.88	6646.28	72.32	0.59	0.74			0.	...	17.80	11.14	175	2.4
-891.72	6646.94	70.13	0.52		1.31		0.	...	17.99	10.91	173	4.2
-859.32	5637.67	58.95	...		0.28		0.	...	18.09	14.13	16	0.7
-760.36	6088.94	54.03	...		0.11		0.	...	16.49	11.23	159	0.4

Table 10—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-737.72	5892.92	58.99	0.68	0.51			0.	...	17.32	11.36	170	1.7
-711.58	6082.32	54.15	0.52		4.47		0.	...	17.28	10.64	173	15.4
-698.27	5663.34	55.97	0.78	0.77			0.	...	22.24	13.33	6	1.7
-700.49	5665.68	55.79	...		0.13				19.71	16.38	65	0.2
-668.23	6594.58	69.48	...	0.14			0.	...	17.97	12.06	153	0.4
-668.16	6017.34	56.14	...		0.09		0.	...	17.68	10.31	171	0.3
-445.97	6636.15	69.72	0.80		0.36		0.	...	23.95	17.55	20	0.5
-445.45	6626.89	70.89	...	0.38			0.	...	23.35	17.24	178	0.6
-304.32	6282.98	63.88	0.58	0.96			0.	...	18.63	11.94	168	2.7
-278.20	6565.13	66.67	...	0.79			0.	...	23.99	15.07	178	1.4
-237.21	6518.41	68.43	...		1.13		0.	...	20.90	15.02	179	2.3
-236.76	6517.98	69.83	...	2.74			0.	...	20.41	14.92	0	5.7
-236.65	6517.77	69.83	...		0.36				21.30	14.71	7	0.7
-229.63	6506.96	67.37	...	0.19			0.	...	23.48	15.80	167	0.3
-225.02	6717.59	68.71	0.61	1.89			0.	...	18.81	13.97	161	4.6
-220.14	6716.56	65.27	...		0.25		0.	...	19.11	12.72	174	0.7
-186.09	5936.87	56.84	...		0.44		0.	...	18.20	10.97	168	1.4
-134.79	6592.55	66.21	0.73	0.58			0.	...	21.83	12.60	5	1.3
-109.30	6602.36	64.89	0.78	1.04			0.	...	20.61	12.22	0	2.6
40.40	5833.54	53.31	0.84		0.16		0.	...	18.07	12.31	165	0.5
99.37	5727.64	47.32	0.56		0.81		0.	...	19.29	14.84	15	1.8
100.07	5726.98	49.11	...	0.23			0.	...	17.30	15.53	179	0.6
124.30	5783.05	46.90	0.45		1.99		0.	...	18.85	12.04	169	5.6
125.21	5780.95	48.79	0.56	0.95			0.	...	19.18	12.63	167	2.5
150.16	5801.54	49.11	...	0.38			0.	...	23.24	16.10	1	0.6
150.60	5799.00	47.01	...		0.50		0.	...	25.71	13.07	7	0.9
172.37	5826.65	48.76	...	0.34			0.	...	25.75	14.90	178	0.6

Table 11. G69.540–0.976 (ON 1)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 9.53 × 6.33 mas, PA 177°												
-427.97	217.86	14.81	...	0.06			0.	...	8.54	5.68	179	0.8
-391.54	208.72	14.16	0.42	14.17			0.70	111	9.50	6.52	176	145.5
-391.36	209.19	14.26	0.35		7.90				9.47	6.59	175	80.5
-391.44	208.91	14.21	0.36			7.22			9.46	6.50	175	74.6
-382.89	130.84	13.58	...	0.34			0.	...	10.41	7.03	161	2.9
-375.52	125.88	13.62	0.28	1.53			0.10	23	9.68	7.17	165	14.0
-332.23	101.05	16.22	...		0.25		0.	...	10.16	7.63	169	2.0
-331.84	100.12	13.41	...	0.62			0.15	45	9.62	8.01	159	5.1
-331.21	460.23	16.04	...		0.16		0.	...	9.31	8.06	22	1.3
-319.52	-81.18	16.39	...		0.22		0.	...	12.21	7.06	1	1.6
-259.15	100.37	16.74	0.22		1.35		0.08	45	9.18	6.97	174	13.4
-258.36	100.05	13.76	...	0.35			0.58	0	9.99	7.39	167	3.0
-255.04	88.31	16.47	0.30		7.51		0.11	59	9.61	6.68	177	74.4
-255.11	88.40	16.48	0.27			0.47			10.29	7.21	171	4.2
-254.88	87.64	13.44	0.33	4.03			0.11	22	9.83	6.67	179	39.1
-254.57	87.96	13.41	...			0.19			9.07	6.32	176	2.1
-249.93	103.39	13.76	0.29	4.94			0.18	33	9.70	6.66	173	48.6
-249.71	103.33	16.75	...		2.23		0.	...	9.75	6.65	171	21.9
-237.57	97.87	13.72	0.33	0.96			0.	...	10.57	8.66	169	6.7
-234.14	98.05	16.33	0.47		8.07		0.16	38	9.89	6.94	173	74.7
-234.52	97.71	16.30	0.64			0.69			10.11	7.20	171	6.1
-227.88	419.45	16.04	...		0.16		0.	...	9.51	6.97	171	1.5
-215.20	91.23	13.76	...	0.10			0.	...	9.40	7.08	10	1.0
-212.78	81.14	15.86	0.33		1.15		0.14	45	9.57	6.90	4	11.1
-202.55	86.08	15.94	0.39		2.27		0.06	45	9.54	6.28	178	24.1
-180.37	277.35	16.04	...		0.09		0.	...	8.09	5.83	179	1.3
-129.49	996.74	6.02	...	0.07			0.	...	10.04	6.07	12	0.7
-65.23	1024.07	3.16	0.37		1.39		0.	...	9.58	6.30	176	14.6
-64.79	999.69	4.98	0.34		0.67		0.	...	9.61	6.38	176	7.0
-58.47	998.60	6.19	0.37		1.72		0.	...	9.68	6.39	178	17.7
-52.57	605.87	13.41	...	0.25			0.	...	10.69	6.88	163	2.1
-52.12	1004.96	4.62	...		0.27		0.	...	9.31	6.27	176	2.9
-51.26	1010.88	3.95	0.24		0.66		0.	...	9.72	6.31	177	6.9
-45.70	993.75	4.78	0.44		0.87		0.	...	9.49	6.36	178	9.1
-43.82	1035.44	3.45	0.29		7.01		0.02	135	9.71	6.35	178	72.3
-42.29	1051.12	5.19	0.30		0.32		0.49	0	9.43	6.35	179	3.4

Table 11—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-41.07	1010.19	3.56	...		0.18		0.	...	11.90	8.97	68	1.1
-40.61	1056.76	5.50	...		0.19		0.	...	9.99	6.76	174	1.8
-23.21	1107.56	2.50	0.30	0.15			0.	...	11.26	6.74	4	1.3
-19.38	1127.40	3.50	0.27	0.54			0.	...	9.71	6.32	178	5.6
-0.01	-0.01	12.83	0.29	15.62			0.15	101	9.52	6.46	177	161.4
-0.03	0.25	12.82	0.36			1.21			9.55	6.57	154	12.2
0.45	0.05	12.83	0.42		0.14				9.00	7.45	174	1.4
16.16	5.06	14.29	...		0.52		0.80	152	11.17	9.58	76	3.1
16.23	4.83	14.29	...			0.31			12.02	9.10	101	1.8
15.93	4.86	14.29	...	0.15					9.48	7.94	165	1.3
26.51	529.67	14.29	...		0.90		0.82	66	20.20	9.29	115	3.1
24.01	530.14	14.29	...			0.23			10.94	8.43	166	1.6
30.84	532.50	13.16	0.44	0.67			0.82	50	10.15	7.96	165	5.3
36.98	527.65	13.15	1.01	0.50			0.	...	9.84	9.57	154	3.4
38.17	527.69	13.84	0.37		1.80		0.79	63	10.27	8.84	134	12.6
38.09	527.37	13.81	0.30			0.76			9.95	8.25	158	5.9
42.01	1183.28	3.39	...		0.11		0.	...	11.12	5.41	169	1.2
150.33	-4.44	14.03	0.31	6.35			0.77	103	10.87	8.17	147	45.5
153.07	-5.29	14.11	0.38		3.23				14.51	9.48	114	14.9
150.70	-4.80	14.06	0.34			3.02			11.61	9.34	125	17.9
152.17	-5.38	15.01	0.47		4.50		0.32	45	13.75	9.76	107	21.3
1667 MHz — Beam: 9.52 × 6.32 mas, PA 177°												
-377.76	124.91	14.21	0.30	1.16			0.35	148	10.40	7.43	171	9.5
-16.58	-8.39	13.85	0.28	1.18			0.45	5	9.58	8.48	176	9.2
-17.28	-8.14	13.76	...			0.23			9.44	7.28	171	2.1
160.68	-13.07	14.31	0.37	0.40			0.23	9	10.61	8.47	143	2.9
161.28	-12.53	14.64	0.34		1.31		0.33	78	10.48	8.20	149	9.7
169.59	-18.10	14.28	...	0.18			0.	...	13.92	8.16	142	1.0

Table 12. G70.293+1.601 (K3–50)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux Density	Flux Density	Flux Density			Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 39.25 × 35.77 mas, PA 159 $^\circ$												
-111.24	-468.30	-18.84	0.47	0.44			0.	...	55.97	34.91	145	0.1
-108.32	-590.68	-17.59	...		1.75		0.	...	51.62	37.85	135	0.6
-92.11	-572.10	-21.99	...	0.65			0.	...	58.44	35.41	140	0.2
-50.27	-436.48	-22.47	0.35		3.15		0.	...	57.46	38.75	141	0.9
-5.73	0.08	-21.32	0.46	6.73			0.14	8	59.27	39.66	142	1.8
-0.16	0.50	-19.76	0.36		17.66		0.05	53	60.04	40.69	142	4.6
13.90	5.36	-20.40	0.41		5.86		0.15	56	59.15	40.47	139	1.6
275.96	155.45	-19.54	0.37	2.57			0.10	90	59.22	38.16	143	0.7
279.38	151.91	-20.93	...	0.41			0.	...	65.90	37.15	145	0.1
281.37	150.97	-19.31	0.35		1.18		0.17	108	58.18	36.69	142	0.4
1737.41	-1922.17	-22.35	0.85	2.65			0.	...	59.35	44.09	155	0.6
1740.92	-1926.51	-23.15	0.95	2.90			0.	...	65.09	45.18	165	0.6
1741.48	-1924.21	-21.42	0.88		2.19		0.	...	56.57	44.05	151	0.6
1742.24	-1918.48	-20.79	0.94		1.58		0.	...	55.65	45.58	160	0.4
1667 MHz — Beam: 39.18 × 35.73 mas, PA 159 $^\circ$												
-0.04	3.94	-21.05	0.47	3.53			0.25	19	57.99	39.77	140	1.0
0.53	3.66	-20.15	0.41		4.13		0.	...	60.40	40.79	141	1.1
10.27	4.23	-20.76	0.51		3.92		0.14	11	59.67	43.12	138	1.0

Table 13. G75.782+0.343 (ON 2 N)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 17.99 × 13.54 mas, PA 96 $^\circ$												
-1039.23	-281.17	2.41	0.30		2.38		0.	...	42.30	23.81	125	1.5
-958.19	-72.36	1.89	0.27	1.12			0.	...	31.60	21.21	118	1.1
-956.09	-67.84	1.88	...		0.61				29.94	21.09	88	0.6
-937.05	-207.87	2.76	...	0.83			0.	...	31.27	21.54	81	0.8
-900.33	52.74	2.55	0.45	38.55			0.02	90	34.61	26.78	134	26.4
-897.74	51.35	2.54	0.34			0.27			25.75	19.94	99	0.3
-868.32	80.83	2.41	...	2.91			0.	...	38.68	21.84	107	2.2
-867.53	-178.39	2.05	...	1.31			0.	...	39.49	20.78	109	1.0
-867.49	14.60	2.23	...	1.31			0.	...	44.58	21.55	72	0.9
-863.36	-91.85	2.24	0.31		1.24		0.	...	30.53	22.86	99	1.1
-830.35	-140.58	2.41	...		3.02		0.	...	40.36	26.76	153	1.8
-832.65	-126.60	2.41	0.40	1.15					29.96	19.38	101	1.3
-823.75	-301.36	2.23	...		0.40		0.	...	35.78	22.19	137	0.3
-808.23	66.00	2.55	0.28	3.07			0.	...	30.06	20.11	109	3.2
-806.33	-125.18	2.41	...	2.52			0.	...	72.02	18.39	107	1.2
-806.27	-620.00	2.05	...	2.10			0.	...	43.04	27.47	101	1.1
-799.01	-618.14	2.23	...		1.40				68.37	25.05	80	0.5
-517.84	606.29	-0.23	...		0.30		0.	...	30.02	26.36	1	0.2
-483.25	616.95	-1.26	0.56	3.42			0.26	90	50.02	25.74	149	1.7
-479.58	619.23	-1.29	...			0.22			31.67	19.35	155	0.2
-105.67	-805.00	-4.45	...	1.31			0.	...	30.75	21.82	144	1.2
-104.91	-803.41	-7.16	0.28		2.45		0.13	45	31.65	26.71	133	1.8
-100.17	-808.26	-7.26	...			0.12			32.47	15.91	88	0.1
-84.20	-805.75	-6.03	...		0.70		0.	...	26.38	23.45	79	0.7
-28.06	-578.20	-2.52	...		1.05		0.	...	29.93	25.50	134	0.9
-6.61	-574.67	-3.92	...		1.19		0.	...	30.65	24.46	85	1.0
-0.11	-0.12	-3.69	0.59	48.36			0.13	99	34.50	27.09	117	32.9
1.61	-0.57	-3.59	0.43			3.10			36.81	26.04	109	2.1
7.14	21.86	-2.81	1.00		10.43		0.24	14	40.03	31.46	124	5.3
11.45	27.94	-2.87	...			2.34			51.32	25.81	120	1.2
16.30	1500.04	-3.13	0.79	0.12			0.	...	20.12	12.23	101	0.3
16.67	17.50	-1.02	0.75	1.80			0.	...	40.72	24.90	143	1.1
17.72	-29.39	-4.51	0.85		4.46		0.20	90	40.66	30.02	136	2.3
19.54	-33.11	-2.16	...	2.30			0.	...	32.93	29.41	107	1.5
25.74	-16.87	-5.46	0.48		14.56		0.16	90	47.48	34.14	90	5.7
28.09	-14.07	-5.33	...			0.65			33.23	24.73	102	0.5

Table 13—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. Jy	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
27.75	19.75	-2.87	...	9.69			0.23	169	40.54	25.63	109	5.9
27.52	19.51	-2.78	0.46			1.96			46.82	24.63	116	1.1
49.22	-7.87	-3.39	0.55		12.29		0.	...	38.91	29.57	118	6.8
49.74	-4.83	-0.51	0.68	6.53			0.34	152	40.27	27.65	118	3.7
49.99	-4.82	-0.50	0.67			0.81			35.70	21.52	109	0.7
55.45	-16.71	-4.58	0.45		2.44		0.	...	33.89	27.81	115	1.6
99.75	-22.95	-1.54	0.36		3.32		0.84	177	33.36	26.57	107	2.4
98.45	-23.03	-1.53	0.34			1.94			33.85	26.17	118	1.4
99.21	-23.14	-1.48	0.45	1.40					30.70	24.52	126	1.2
123.63	-11.64	1.02	0.49		2.18		0.	...	32.38	26.06	126	1.6
141.55	-62.44	0.42	0.35		3.73		0.10	45	32.03	25.27	123	2.9
148.13	-197.56	-4.31	0.52	1.01			0.	...	27.70	20.84	134	1.1
150.02	-215.37	-7.66	0.57		0.41		0.	...	31.78	24.43	120	0.3
150.45	-256.34	-7.90	0.28		1.66		0.	...	30.61	30.05	157	1.1
150.79	-195.88	-6.70	0.42		1.98		0.30	70	30.36	25.19	122	1.6
178.73	-157.68	-3.92	...	1.32			0.	...	31.14	25.90	173	1.0
1667 MHz — Beam: 17.74 × 13.31 mas, PA 96°												
-1848.15	26.73	2.76	...		0.67		0.	...	33.93	23.46	93	0.5
-1686.10	39.66	4.34	...	0.40			0.	...	35.18	24.67	116	0.3
-1431.18	-425.35	3.28	...		1.12		0.	...	36.30	23.02	140	0.9
-1339.80	-288.25	4.16	...	1.52			0.	...	60.66	27.15	108	0.6
-1350.50	-286.17	4.10	0.47		0.62				31.65	26.51	153	0.5
-1248.03	-14.27	3.46	...		2.19		0.	...	67.77	24.37	133	0.8
-1211.04	-10.83	3.09	0.58		1.46		0.	...	37.66	25.03	122	1.0
-1121.81	-45.15	2.93	...		0.97		0.	...	35.74	23.56	115	0.7
-932.00	161.59	2.05	0.27	1.74			0.	...	60.61	27.28	150	0.7
-513.62	653.24	-1.98	...	0.30			0.	...	34.80	25.40	100	0.2
-493.87	637.29	-1.81	...	0.18			0.	...	28.43	15.16	116	0.3
-457.28	631.45	-0.81	0.33	1.71			0.	...	59.19	24.37	144	0.8
-103.41	-805.81	-6.60	0.34		2.56		0.20	66	34.85	25.72	139	1.8
-13.20	19.53	-8.70	0.62		0.62		0.	...	32.59	21.99	126	0.6
-9.26	-574.34	-1.66	0.32	2.49			0.	...	33.83	26.10	119	1.8
-3.65	27.41	-4.00	0.33	47.01			0.13	120	35.33	27.50	121	30.8
-5.99	26.24	-4.05	0.41		2.20				31.87	25.60	145	1.7
-2.58	27.25	-4.09	...			2.09			35.87	27.96	127	1.3
-3.48	-2.68	-4.48	0.50	40.65			0.15	66	34.89	26.47	117	28.0
-2.54	-3.88	-5.41	0.59		7.51		0.45	129	33.11	24.76	115	5.8
-3.49	-2.63	-5.46	0.43			2.64			35.02	26.66	118	1.8

Table 13—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
4.87	1499.91	-4.97	...		0.14		0.	...	20.69	13.36	96	0.3
12.24	35.94	-1.93	0.51		0.41		0.	...	33.74	23.56	118	0.3
12.45	-75.91	-7.18	0.35	1.37			0.	...	26.99	24.11	104	1.3
15.57	-21.67	-4.05	0.55		7.06		0.17	135	54.61	27.80	153	3.0
24.52	-18.85	-4.00	0.48			0.99			31.60	25.19	79	0.8
16.81	-78.22	-8.93	0.38		0.63		0.	...	30.95	22.27	104	0.6
17.23	-35.98	-4.62	...		8.18		0.	...	38.77	31.81	129	4.2
19.28	1499.98	-3.74	...	0.18			0.	...	20.43	12.85	88	0.4
25.07	-22.85	-3.21	...	11.66			0.18	108	48.96	36.08	138	4.2
20.04	-7.03	-3.40	0.36			1.31			54.40	22.49	139	0.7
28.40	-18.55	-4.97	0.29		23.03		0.26	135	48.28	32.14	126	9.4
30.42	-18.51	-4.89	0.37			1.09			30.93	23.13	131	1.0
30.11	1498.41	-4.97	...		0.17		0.	...	25.13	13.73	82	0.3
42.22	-450.59	-3.61	0.32			3.36	1.00	117	35.27	25.07	127	2.4
41.05	-451.11	-3.63	0.33		3.05				32.71	24.29	133	2.4
42.38	-450.54	-3.61	0.32	2.39					27.81	24.51	137	2.2
49.93	-14.22	-1.07	0.57	0.53			0.	...	47.03	23.67	24	0.3
148.94	-255.85	-7.48	0.38		1.85		0.25	45	32.14	26.82	124	1.4
150.24	-215.43	-6.02	...	0.55			0.	...	49.20	21.54	141	0.3
150.50	-205.72	-6.90	0.56		2.82		0.38	135	32.34	24.49	118	2.3
150.60	-205.75	-6.90	...			0.41			31.21	21.72	96	0.4
151.95	-608.54	-3.79	0.41	1.49			0.	...	33.11	22.53	98	1.3
152.67	-245.58	-6.90	...	1.05			0.	...	39.82	28.00	171	0.6

Table 14. G81.721+0.571 (W75 S)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 9.43 × 7.41 mas, PA 2 $^\circ$												
-465.11	447.67	2.53	0.39	0.50			0.	...	15.35	8.47	20	2.4
-451.74	446.26	-0.75	...		0.27		0.	...	10.77	10.45	149	1.5
-444.08	476.30	2.98	0.30	2.33			0.17	90	12.36	9.58	134	12.5
-444.89	476.61	2.95	...			0.16			10.32	8.69	160	1.1
-438.48	410.96	-0.28	0.40		0.64		0.36	135	13.19	8.13	175	3.8
-438.93	409.27	-0.21	0.49			0.11			13.90	8.59	2	0.6
-437.07	435.51	-0.22	...		0.40		0.	...	13.59	8.52	18	2.2
-436.69	422.18	-0.22	...		0.59		0.	...	11.40	8.59	3	3.8
-428.50	442.87	-0.36	0.30		0.52		0.	...	11.61	10.36	161	2.7
-398.39	407.14	1.62	0.24		1.79		0.90	145	9.73	7.52	2	15.6
-398.41	407.04	1.62	0.25			1.18			9.85	7.47	2	10.1
-398.47	406.71	1.54	...	0.77					9.56	7.39	1	6.9
-395.45	394.29	0.68	0.36		0.61		0.	...	10.65	9.47	65	3.8
-384.46	369.61	4.72	0.33	0.29			0.	...	10.18	7.86	178	2.3
-383.91	370.38	0.99	0.35		11.66		0.25	141	10.83	8.00	3	85.5
-384.14	370.52	1.00	0.35			1.40			10.70	7.67	4	10.8
-379.82	396.52	1.36	...		1.24		0.26	160	10.04	7.23	10	10.9
-379.03	339.26	0.64	0.44		12.21		0.39	156	11.44	7.86	167	86.3
-379.34	339.47	0.63	0.36			2.23			10.57	7.60	175	17.7
-378.59	339.82	4.53	0.46	0.18			0.	...	10.94	7.80	11	1.3
-377.97	346.48	3.54	0.38	3.68			0.04	135	10.63	7.76	175	28.4
-379.45	346.94	3.47	...			0.07			12.28	7.49	167	0.5
-373.50	390.49	1.36	0.30		6.76		0.26	160	12.64	9.36	179	36.3
-374.27	390.74	1.37	0.27			1.00			13.63	10.03	166	4.8
-372.62	395.61	5.15	0.28	1.53			0.	...	11.28	8.27	17	10.4
-371.02	386.86	5.21	0.28	1.87			0.11	73	10.08	7.87	1	15.0
-371.74	388.58	5.23	...			0.16			14.98	7.94	169	0.9
-364.77	317.90	4.69	0.37	1.40			0.	...	10.39	8.55	7	10.0
-361.40	321.67	1.12	0.52		1.03		0.	...	9.99	8.25	5	7.9
-256.88	107.90	0.66	...	0.24			0.	...	12.19	11.19	103	1.1
-230.43	99.02	0.84	...	1.71			0.	...	11.36	9.91	84	9.6
-14.40	-82.58	0.66	...	0.40			0.	...	11.91	10.07	16	2.1
-12.73	147.86	1.71	...	0.21			0.	...	13.77	10.25	6	1.0
-7.76	-72.21	1.28	0.36		0.28		0.87	20	10.07	7.76	18	2.3
-5.70	25.19	1.71	0.32	26.28			0.32	156	13.01	8.94	16	143.7
-6.55	24.60	1.71	0.32			3.04			11.64	7.56	177	22.2
-8.58	21.33	1.75	0.29		2.20				14.34	8.17	15	11.9

Table 14—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-5.69	27.00	0.60	0.45	8.31			0.61	175	13.67	8.35	5	46.3
-6.96	25.31	0.53	0.42			2.16			12.32	7.49	5	14.9
-6.72	24.96	0.46	0.37		0.76				11.27	7.50	0	5.7
-5.29	131.18	1.79	0.32	1.41			0.80	135	11.92	7.62	175	9.8
-5.08	130.94	1.79	0.29			0.54			11.75	7.42	176	3.9
-4.41	130.46	1.89	...		0.18				10.40	7.09	173	1.6
-2.55	87.87	2.04	0.36	0.38			0.27	135	10.77	8.10	173	2.8
-1.21	46.67	1.89	...	0.68			0.13	123	10.06	7.59	15	5.7
-1.96	47.01	1.71	0.28			0.15			8.41	6.79	170	1.7
-0.26	0.16	1.24	0.33	17.40			0.12	119	10.84	7.54	2	135.4
0.10	0.20	1.26	0.31			1.24			10.45	7.80	2	9.7
8.92	167.23	4.18	...	0.11			0.	...	9.37	7.72	3	1.0
16.01	-237.35	-0.93	0.42	4.97			0.84	76	9.97	7.83	175	40.5
16.18	-237.57	-0.96	0.36			3.21			10.36	7.96	172	24.8
18.30	-241.24	-1.01	0.36		3.00				11.34	8.37	163	20.1
140.47	673.27	0.96	0.30	0.99			0.	...	9.57	7.44	1	8.8
303.58	753.85	5.23	...	0.28			0.	...	13.62	8.21	24	1.6
307.96	764.28	5.74	0.42	1.62			0.	...	11.26	7.57	4	12.1
1205.80	1259.63	-1.80	0.28		0.29		0.	...	9.91	7.90	2	2.4
1277.74	1429.81	-4.60	0.37	1.66			0.37	82	9.70	7.81	177	14.0
1277.94	1430.20	-4.59	0.34			0.32			9.51	7.96	2	2.7
1277.85	1429.48	-0.10	0.37		2.72		0.	...	10.20	7.75	1	21.9
1334.15	1420.64	-5.92	0.83	0.12			0.	...	11.13	10.41	166	0.7
1393.75	-47.26	-3.61	0.27	4.02			0.18	45	11.83	8.02	8	26.9
1393.76	-47.14	-3.60	0.25			0.32			10.99	7.82	11	2.4
1433.08	-391.68	-2.86	...	0.39			0.	...	9.19	7.58	8	3.5
1442.81	-387.11	-2.97	0.33	1.15			0.	...	9.93	8.76	5	8.4
1445.25	-385.01	-0.45	0.30		0.74		0.	...	10.11	8.00	8	5.8
1451.70	-381.16	-3.24	0.34	0.92			0.	...	10.74	8.02	16	6.8
1452.60	-372.65	-2.02	0.53	0.43			0.	...	12.58	9.38	63	2.3
1458.07	-366.77	1.12	0.34		0.20		0.	...	9.16	7.38	8	1.9
1465.68	-380.69	-3.21	0.28	0.60			0.	...	12.47	8.05	179	3.8
1464.15	-385.18	-3.21	...		0.14				10.56	7.19	9	1.2
1487.21	-385.34	-4.09	...	0.59			0.	...	9.43	8.71	20	4.6
1488.14	-385.33	-1.39	0.41		0.18		0.	...	9.02	8.43	37	1.5
1496.40	-374.06	-4.15	0.56	0.73			0.	...	12.66	8.17	27	4.5
1497.81	-383.25	-4.43	0.30	1.28			0.	...	10.56	9.63	62	8.0
1507.31	-381.26	-1.45	...		0.99		0.	...	12.30	7.27	7	7.0
1515.04	-386.41	-4.15	0.47	0.69			0.	...	10.73	7.48	4	5.5
1515.24	-386.41	-4.09	...		0.07				9.04	7.34	9	0.6

Table 14—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin. Flux Density (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1517.68	-378.38	-1.12	0.51		3.34		0.	...	11.37	7.56	10	24.7
1518.41	-377.68	-3.38	0.44	0.20			0.	...	10.34	7.96	0	1.6
1656.16	-42.55	-3.92	0.28	0.62			0.20	135	14.03	7.44	2	3.8
1656.63	-41.83	-1.26	0.30		3.40		0.19	105	16.98	7.74	179	16.5
1656.67	-42.60	-1.28	0.30			0.25			13.30	7.28	179	1.6
1658.79	24.19	-0.92	...		0.20		0.	...	11.45	7.93	13	1.4
1667 MHz — Beam: 9.43 × 7.40 mas, PA 2°												
-442.61	412.05	0.29	0.50		0.15		0.	...	11.76	7.15	176	1.1
-398.54	404.92	2.25	0.41	2.48			0.11	119	10.89	7.65	3	18.9
-398.47	405.00	2.31	0.50			0.16			11.16	8.47	175	1.1
17.00	-240.33	-1.11	0.41	3.34			0.83	83	11.50	8.21	176	22.5
17.23	-240.69	-1.10	0.34			2.10			11.26	8.22	173	14.4
17.52	-240.85	-1.09	0.32		1.79				11.17	8.28	176	12.3
1516.00	-385.98	-1.84	0.30		0.42		0.	...	10.79	7.53	179	3.3
1518.31	-379.01	-1.44	...		0.14		0.	...	9.96	7.41	19	1.2
1662.80	-9.33	-1.80	0.33		0.15		0.	...	14.71	7.11	179	0.9

Table 15. G81.871+0.781 (W75 N)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 9.42 × 7.42 mas, PA 1°												
-491.90	147.41	6.83	0.27		0.63		0.	...	12.47	8.48	169	3.8
-490.03	-442.56	7.36	...		0.14		0.	...	14.55	7.88	171	0.8
-295.89	254.63	5.96	...		1.49		0.	...	9.38	8.28	167	12.2
-258.76	-311.44	12.64	...	0.86			0.	...	9.32	7.59	7	7.7
-246.92	-1144.72	9.71	0.36	0.42			1.00	45	11.54	10.66	6	2.1
-247.41	-1144.05	9.71	0.37			0.32			10.09	9.69	5	2.1
-247.52	-1143.14	9.65	...		0.27				10.15	9.11	158	1.8
-131.87	-223.47	11.93	...		0.11		0.	...	9.97	8.00	4	0.9
0.01	0.02	12.42	0.37	72.22			0.10	24	9.51	7.50	3	643.7
0.07	0.20	12.38	0.42			3.79			9.49	7.47	4	34.0
0.38	0.74	12.35	0.42		1.08				9.50	7.55	1	9.6
0.19	0.40	9.31	0.28		31.14		0.21	177	9.43	7.58	2	276.9
0.08	0.23	9.30	0.27			3.43			9.53	7.51	5	30.4
-0.02	0.04	9.31	0.25	1.73					9.64	7.46	1	15.3
74.96	29.55	11.05	...		0.31		0.	...	10.82	7.62	173	2.4
91.71	-72.40	13.67	0.29		0.93		0.	...	14.95	8.46	12	4.7
118.89	-71.52	9.44	0.34	0.43			0.	...	14.22	10.50	97	1.8
124.99	-74.92	9.93	0.26	1.29			0.66	38	9.74	7.51	8	11.2
125.03	-75.03	10.00	0.25			0.50			9.78	7.63	7	4.2
125.26	-75.36	10.00	...		0.19				10.13	7.32	176	1.6
128.96	-54.63	12.09	0.30		0.63		0.39	45	10.44	7.55	5	5.1
130.83	-49.32	13.36	0.26		1.04		1.00	121	9.75	7.81	6	8.7
133.40	-65.99	12.69	0.36		0.30		0.	...	13.21	8.49	169	1.7
139.88	-15.27	12.86	0.25		3.35		0.95	35	9.70	7.70	178	28.5
139.83	-15.41	12.81	0.25			2.35			9.70	7.70	178	20.1
139.83	-15.41	12.85	0.26	1.61					9.68	7.77	178	13.6
178.19	512.94	5.87	0.27		34.82		0.95	67	9.72	7.71	6	295.4
178.03	512.65	5.88	0.32			25.64			9.93	7.71	11	213.0
177.93	512.61	5.90	0.34	19.25					9.96	7.69	12	159.7
193.69	580.10	5.27	0.30		0.88		0.67	90	10.79	8.06	7	6.4
193.34	579.83	5.25	0.31			0.30			10.27	7.51	177	2.4
195.51	593.70	9.01	0.43	0.68			0.32	55	9.40	7.51	6	6.1
195.65	593.59	8.95	...			0.22			9.81	7.40	13	2.0
198.42	485.56	10.00	...		0.24		0.	...	10.84	7.93	172	1.7
200.07	716.14	11.05	...	0.99			0.	...	9.89	7.99	7	8.0
200.46	705.97	10.85	0.28	1.45			0.08	90	10.10	7.55	6	12.1
201.09	704.40	10.88	...			0.06			12.83	6.73	2	0.5

Table 15—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
203.56	672.89	8.98	0.23	0.89			0.	...	10.83	8.20	154	6.3
204.05	672.55	4.37	...		0.33		0.	...	11.98	8.26	163	2.1
204.45	603.59	9.27	0.25	10.35			0.20	33	9.57	7.42	2	92.7
204.53	603.63	9.30	0.24			0.98			9.55	7.34	4	8.9
206.58	1100.24	5.41	0.39	1.45			0.76	33	10.07	8.69	36	10.5
206.70	1100.44	5.43	0.34			0.66			10.27	8.72	22	4.7
212.51	1105.06	5.88	0.29	1.33			0.	...	11.85	9.78	130	7.3
230.37	579.37	10.12	0.30	0.34			0.	...	10.59	7.98	16	2.6
230.46	580.81	5.36	0.30		6.35		0.48	113	9.78	7.70	5	53.6
230.32	580.77	5.43	0.34			1.61			9.58	7.61	4	14.1
230.24	580.66	5.41	0.34	0.51					9.84	7.91	4	4.2
277.20	1113.16	6.41	0.37	0.25			0.	...	12.47	7.50	12	1.7
278.15	1111.96	4.20	0.53			0.55	0.44	128	9.78	9.39	44	3.8
277.10	1112.27	4.23	0.35	0.20					10.21	7.54	3	1.6
278.44	1094.23	5.68	0.41	4.25			0.86	54	10.68	8.07	16	31.3
278.59	1094.35	5.61	0.41			2.47			10.72	8.06	15	18.2
278.70	1094.35	5.66	0.35		1.53				10.60	8.42	14	10.9
282.57	1112.31	4.05	0.27		4.90		0.20	113	9.65	8.86	12	36.4
296.99	1109.57	6.84	0.29	0.55			0.	...	9.94	9.40	94	3.7
300.58	1145.27	7.31	0.26	0.83			0.16	135	9.65	7.79	10	7.0
301.19	1176.91	3.14	...		0.59		0.16	90	9.24	7.84	0	5.2
301.84	1177.22	5.69	0.22		8.01		0.98	78	9.51	7.62	0	70.3
301.61	1177.05	5.71	0.25	7.27					9.42	7.49	3	65.5
301.67	1177.13	5.78	0.23			7.15			9.56	7.48	3	63.6
324.07	128.64	13.87	...		0.24		0.	...	12.52	9.12	30	1.3
342.17	1131.57	6.52	0.29	0.91			0.80	31	9.70	8.02	9	7.5
342.32	1131.66	6.48	0.28			0.43			9.50	8.05	38	3.6
342.16	1131.65	6.48	0.34		0.17				9.67	8.25	22	1.4
342.72	1176.74	5.51	0.29	9.63			0.62	134	9.40	7.65	1	85.2
343.06	1176.81	5.61	0.29			3.75			9.49	7.67	3	32.8
343.14	1176.89	5.61	...		1.43				8.96	7.73	178	13.2
400.41	1227.72	4.61	0.26		0.94		0.52	110	9.64	7.69	4	8.1
399.96	1227.32	4.55	...			0.29			9.67	7.97	7	2.3
401.07	1228.47	4.73	...	0.08					10.60	6.60	12	0.8
443.56	1275.64	5.12	0.41		2.55		0.66	72	9.43	8.10	10	21.2
443.33	1275.39	5.08	0.39			1.02			9.54	8.13	10	8.4
443.14	1275.51	5.04	0.38	0.40					9.27	7.90	5	3.5
458.05	1292.55	5.16	0.32		10.43		0.92	80	12.25	8.23	32	65.8
457.55	1292.31	5.25	0.33			7.12			13.01	8.20	32	42.5
456.98	1291.82	5.18	0.32	5.16					12.93	8.24	33	30.8

Table 15—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
488.65	1345.80	7.21	0.36	0.83			0.	...	10.31	7.58	4	6.8
488.85	1345.56	5.14	0.41		11.16		0.60	32	10.66	8.04	14	82.8
489.61	1345.88	5.25	0.42			3.30			10.27	7.70	8	26.5
489.37	1345.75	5.29	0.41	1.15					10.22	7.61	8	9.4
533.23	1446.84	7.01	...	0.27			0.	...	10.15	8.77	35	1.9
543.13	-89.05	3.14	...	0.78			1.00	28	20.35	9.41	119	2.6
542.51	-88.38	3.14	...			0.72			17.85	9.29	119	2.8
544.77	-89.30	3.10	0.43		0.59				15.79	9.31	122	2.5
547.14	1489.04	6.17	0.31	0.86			0.	...	11.96	9.77	8	4.7
550.86	1494.74	3.66	0.31		9.91		0.13	100	11.00	8.37	4	68.4
550.65	1494.67	3.67	0.29			0.57			10.26	8.07	0	4.5
555.38	1506.81	6.31	...	0.17			0.	...	10.00	8.39	150	1.3
582.80	-88.91	3.32	...	0.49			0.	...	23.32	11.22	116	1.2
601.87	-97.82	3.13	0.30		8.18		0.	...	15.28	9.76	127	34.9
601.55	-97.93	3.14	...	7.32					14.73	9.50	130	33.3
604.22	-183.90	1.93	0.35	0.81			0.	...	10.00	9.44	145	5.4
612.54	-92.40	3.14	...	1.36			0.	...	10.59	10.03	55	8.1
613.93	-92.23	3.12	0.30		0.98				10.65	9.69	51	6.1
620.00	-185.49	4.02	...	0.10			1.00	0	10.53	8.23	136	0.7
656.74	-194.18	0.68	...		0.20		0.	...	10.79	8.06	76	1.5
677.27	-204.58	0.68	0.36	1.65			1.00	56	26.12	13.03	113	3.1
680.97	-206.23	0.64	0.39		0.79				12.87	10.96	5	3.6
707.02	-18.21	0.60	0.93		0.19		0.	...	13.16	7.13	144	1.3
716.00	-220.60	0.73	0.44	0.32			0.97	33	14.68	10.91	150	1.3
724.62	-233.87	0.68	...	0.16			1.00	45	11.83	8.03	3	1.1
725.64	-131.42	2.45	0.31		170.89		0.93	63	9.46	7.46	2	1539.4
725.50	-131.59	2.43	0.30			112.24			9.41	7.45	1	1018.6
725.39	-131.66	2.41	0.30	72.85					9.42	7.44	2	660.8
743.47	-145.60	-0.07	0.37		4.08		0.96	162	9.50	7.64	3	35.7
743.18	-145.80	-0.07	0.38			3.20			9.38	7.52	8	29.1
743.04	-145.98	-0.07	0.38	2.66					9.35	7.53	0	24.1
757.56	-141.53	2.27	...	1.00			0.	...	15.17	9.83	156	4.3
759.86	-167.15	1.60	0.32		0.94		0.97	67	9.72	8.34	3	7.4
759.78	-167.45	1.60	0.34			0.76			9.38	8.12	2	6.4
759.76	-167.50	1.50	0.38	0.71					9.61	8.15	179	5.7
760.23	-145.83	0.94	0.55		1.14		0.86	15	9.82	7.36	4	10.0
760.16	-146.03	0.99	0.42			1.03			10.15	7.95	34	5.6
766.30	-177.06	-0.40	0.46		2.88		0.71	162	9.19	7.53	2	26.4
766.08	-177.28	-0.40	0.44			1.24			9.33	7.67	3	11.1
765.99	-177.39	-0.40	0.46	0.54					9.34	7.47	7	4.9

Table 15—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
767.01	-131.28	-0.06	0.66		38.06		0.66	145	9.55	7.49	177	338.3
766.86	-131.88	-0.08	0.67			14.83			9.72	7.46	150	130.4
766.65	-131.83	-0.13	0.65	6.27					9.56	7.44	179	56.0
767.42	-157.12	-0.05	0.35	0.39			0.37	0	10.65	8.00	2	2.9
769.91	-125.07	4.93	0.92		3.20		0.38	135	9.39	7.55	1	28.7
769.81	-125.10	4.91	0.85			0.60			9.36	7.41	1	5.5
775.45	-123.43	3.26	0.59		0.75		0.98	45	9.37	7.65	177	6.7
776.93	-123.52	3.25	0.56			0.69			9.98	9.08	35	4.8
776.79	-123.41	3.27	0.60	0.62					12.49	9.43	84	3.3
779.86	-122.57	11.05	0.52		0.50		0.17	135	9.35	7.35	0	4.6
779.49	-122.38	11.23	...			0.06			9.95	7.94	20	0.5
795.34	-83.99	2.40	0.28	0.76			0.	...	8.51	6.94	165	8.2
808.47	-132.94	3.67	...		0.26		0.73	63	11.15	7.68	0	2.0
808.04	-132.92	3.67	...	0.15					10.03	7.29	9	1.3
875.68	25.95	-0.55	...	0.31			0.	...	9.89	7.33	1	2.7
947.52	-223.07	17.56	0.38		0.23		0.	...	9.44	7.65	166	2.0
1707.64	-590.45	13.69	...	0.28			0.	...	10.22	8.17	3	2.2
1760.81	-592.27	16.50	...		0.19		0.	...	12.97	8.74	7	1.1
1784.83	-598.31	12.16	0.29	7.20			0.56	40	12.05	9.88	25	38.5
1785.20	-597.81	12.15	0.28			1.99			12.35	10.40	21	9.9
1785.48	-597.58	12.11	...		0.40				10.89	9.84	13	2.4
1793.03	-598.75	12.11	...	5.61			0.27	64	29.11	13.48	137	9.1
1667 MHz — Beam: 9.41×7.42 mas, PA 1°												
0.72	-0.27	11.90	0.28	0.63			0.	...	9.35	7.39	0	5.8
1.46	-0.20	10.18	...		0.15		0.	...	8.52	7.56	7	1.5
77.09	27.12	11.40	...		0.09		0.	...	10.40	7.21	152	0.8
106.24	213.27	10.19	0.31		1.32		0.	...	8.21	7.29	39	14.0
106.49	211.58	10.12	0.29		2.08		0.46	171	9.48	7.54	4	18.5
106.37	211.55	10.22	0.27			0.50			9.45	7.51	24	4.5
106.54	211.09	10.18	...	0.11					9.33	7.11	6	1.0
130.02	-54.01	12.70	0.31	0.66			0.46	122	10.27	7.56	3	5.4
130.21	-53.90	12.67	0.27		0.56				9.92	7.62	4	4.7
130.01	-54.05	12.63	...			0.26			9.91	7.12	39	2.3
170.47	489.37	5.96	0.34		1.56		0.49	32	10.42	8.19	4	11.7
170.31	489.21	6.01	0.25			0.38			9.89	7.93	140	3.1
169.99	490.34	6.14	...	0.11					11.15	7.71	167	0.8
171.11	806.76	11.05	...	0.11			0.	...	9.84	7.56	5	1.0
177.45	507.85	6.38	0.28	0.60			0.76	130	10.15	7.85	10	4.8
177.79	507.89	6.37	0.31			0.29			9.41	7.43	46	2.7
176.93	507.52	6.31	...		0.26				9.66	7.09	177	2.4

Table 15—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP	LCP	Lin.	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
				Flux Density (Jy)					Maj. (mas)	Min. (mas)	PA ($^\circ$)	
182.04	518.52	9.26	0.26		25.05		0.51	43	9.74	7.62	5	214.5
181.96	518.66	9.24	0.25	18.83					9.77	7.65	6	160.2
182.01	518.69	9.24	0.24			11.11			9.73	7.64	3	95.0
183.18	529.50	6.59	0.25		1.39		0.34	22	9.73	7.54	3	12.1
183.07	529.20	6.66	...			0.24			9.60	7.33	12	2.1
196.45	593.57	8.07	...	0.25			0.52	135	9.58	7.45	10	2.2
201.13	707.02	9.98	0.33	1.09			0.27	135	10.00	7.66	3	9.0
207.38	673.45	5.40	0.29		11.07		0.05	15	11.60	8.13	167	74.6
207.48	672.47	5.43	...			0.28			11.47	8.53	156	1.9
207.63	672.66	8.10	0.28	2.55			0.23	63	10.32	7.83	176	20.0
208.13	672.76	8.10	0.27			0.27			9.85	7.80	2	2.3
211.55	452.05	8.24	...		0.17		0.	...	9.80	7.28	12	1.5
221.47	640.09	5.96	...		0.45		0.	...	9.36	7.54	177	4.1
221.98	652.34	6.00	0.37		2.69		0.21	0	14.29	7.70	0	15.5
456.55	1293.68	6.31	...	0.08			0.	...	8.79	7.90	175	0.8
490.90	1348.43	5.61	0.42		0.73		0.24	90	11.51	7.59	5	5.3
491.01	1347.77	5.61	...			0.09			12.05	7.20	11	0.7
747.19	-140.68	1.62	0.64	4.69			0.82	170	9.81	7.67	3	39.6
746.98	-140.80	1.77	0.76			1.68			9.56	7.53	3	14.8
747.01	-141.18	1.88	0.69		1.27				9.99	7.67	4	10.5
747.48	-140.38	1.34	0.45		0.69		0.32	165	9.72	8.08	5	5.6
748.88	-140.07	-0.15	0.51	0.36			0.18	0	10.11	7.92	3	2.9
757.28	-148.86	1.90	0.53	0.87			0.44	90	9.56	8.72	2	6.6
758.33	-150.32	2.75	0.94		0.62		0.72	90	9.60	8.37	8	4.9
758.22	-150.60	2.60	0.92	0.30					9.60	7.51	174	2.7
758.47	-149.35	2.22	0.56		0.43		0.37	102	10.35	7.83	169	3.4
764.37	-129.99	13.69	0.49		0.66		0.49	64	9.25	7.50	5	6.0
764.17	-130.25	13.71	0.42			0.19			9.55	7.49	7	1.6
765.81	-156.15	16.17	0.49	0.13			0.	...	9.18	7.60	177	1.2
766.99	-132.08	5.50	0.64		1.51		0.51	5	9.57	7.43	0	13.5
766.99	-132.11	5.65	0.39			0.44			9.73	7.56	172	3.8
766.40	-131.97	5.68	0.54	0.11					10.65	7.31	171	0.9
767.59	-132.00	4.76	0.83		1.84		0.47	157	9.59	7.67	179	15.9
767.62	-132.14	4.60	0.52			0.40			9.61	7.51	2	3.5
767.43	-131.75	4.52	0.43	0.13					10.24	7.85	10	1.0
768.89	-135.24	19.80	0.52	0.10			0.	...	8.82	6.81	167	1.0
768.97	-120.04	10.38	0.67		2.02		0.	...	9.59	7.60	179	17.6
772.56	-124.15	20.65	0.93	0.18			0.	...	9.07	6.95	9	1.8
772.58	-123.96	8.42	0.68		0.33		0.	...	9.19	7.89	169	2.9
773.44	-162.43	2.25	0.55		0.49		0.89	56	9.82	7.52	178	4.2
773.08	-162.58	2.29	0.56			0.32			9.63	7.39	174	2.8
773.03	-162.54	2.32	0.59	0.24					9.81	7.43	179	2.1

Table 15—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin.	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
959.94	-112.38	9.82	...	0.14			0.	...	9.57	8.22	140	1.1
1782.96	-582.82	15.37	0.34		0.64		0.	...	12.40	11.86	4	2.8
1785.43	-584.17	12.92	0.29	0.61			0.	...	12.39	10.07	10	3.1
1829.95	-587.68	12.63	...	0.17			0.	...	13.03	9.43	64	0.9
1830.90	-562.83	14.92	...		0.11		0.	...	11.56	8.14	174	0.8
1833.01	-561.14	12.63	...	0.70			0.	...	13.02	8.83	18	3.9

Table 16. G109.871+2.114 (Cep A)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA ($^\circ$)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA ($^\circ$)	
1665 MHz — Beam: 10.62 × 8.44 mas, PA 177 $^\circ$												
-2059.77	2172.25	-12.34	0.37		0.27		0.	...	15.21	11.47	74	1.0
-2034.32	3398.58	-2.44	...		1.40		0.	...	15.77	10.50	118	5.4
-1959.14	2219.70	-12.31	0.32		1.17		0.34	171	16.22	11.38	32	4.0
-1959.11	2219.20	-12.29	...			0.19			16.43	10.90	27	0.7
-1909.79	2296.93	-12.11	...		0.66		0.	...	23.05	16.73	49	1.1
-1880.70	2324.57	-11.76	...		0.72		0.	...	23.59	9.27	7	2.1
-1866.69	2324.10	-11.40	0.26		16.02		0.06	25	15.64	11.63	4	56.0
-1866.97	2324.47	-11.44	0.34	1.05					14.36	11.26	4	4.1
-1864.11	2321.59	-11.44	0.26			0.27			13.89	8.78	78	1.5
-1864.78	2281.78	-11.61	0.31		19.06		0.08	78	19.29	9.63	6	65.2
-1864.41	2278.94	-11.61	0.35			0.57			15.76	9.74	8	2.5
-1865.75	2280.26	-11.58	...	0.32					15.09	9.84	1	1.4
-1863.49	2294.56	-11.56	0.26			0.58	0.15	101	12.89	9.17	41	3.2
-1864.12	2295.00	-11.57	0.31	0.28					14.93	9.06	8	1.3
-1855.43	2323.07	-11.41	...		11.94		0.	...	30.23	29.09	40	8.6
-1781.99	-55.69	-8.60	0.40		0.16		0.	...	10.29	8.68	160	1.1
-1780.58	-55.54	-10.88	...	0.08			0.	...	11.84	9.20	165	0.5
-1756.10	-55.36	-12.29	...	0.05			0.	...	13.44	6.32	11	0.4
-1747.40	31.93	-8.55	0.50		0.28		0.	...	10.75	9.22	164	1.8
-1746.60	31.84	-11.00	0.50	0.31			0.	...	11.09	9.34	168	1.9
-1730.51	-16.98	-8.95	0.52		1.24		0.06	135	10.89	8.90	176	8.1
-1730.01	-17.64	-11.73	0.47	0.22			0.	...	11.55	9.02	167	1.3
-1721.13	-20.28	-11.40	0.66	0.21			0.	...	11.24	8.35	170	1.4
-1718.90	-20.39	-8.14	0.59		2.00		0.	...	10.81	8.88	172	13.3
-1700.48	2.42	-6.04	0.54		0.28		0.	...	10.68	8.32	176	2.0
-1689.13	33.50	-10.70	...	0.06			0.	...	10.69	8.74	21	0.4
-1688.63	33.56	-7.79	0.53		0.28		0.	...	11.11	8.73	168	1.8
-1338.56	2954.48	-5.81	0.32		0.41		0.	...	11.44	9.20	2	2.5
-1302.05	3377.98	-6.31	...		0.22		0.	...	13.27	8.71	163	1.2
-1286.98	3362.94	-6.78	0.58		0.64		0.	...	16.84	9.15	154	2.6
-1278.80	3353.45	-0.96	0.27	3.14			0.04	45	11.60	8.63	171	20.0
-1273.20	3341.25	-0.67	0.37	19.89			0.03	152	11.42	8.52	172	129.9
-1272.93	3339.85	-0.73	0.32			0.20			10.19	8.53	164	1.6
-1273.85	3339.78	-0.71	0.40		0.15				13.85	10.34	166	0.7
-1265.28	3314.74	0.04	0.75	0.16			0.	...	16.60	8.08	169	0.7
-981.62	3191.07	-7.60	0.29		0.44		0.	...	11.58	8.90	164	2.7

Table 16—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin. Flux Density (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
-969.10	3185.79	-7.61	0.27		2.25		0.	...	11.73	9.54	156	12.8
-960.57	3181.43	-7.91	0.37		3.47		0.14	57	12.62	9.20	156	19.0
-960.28	3181.38	-7.94	0.35			0.21			11.58	8.82	165	1.3
-936.19	3178.29	-3.14	0.38	0.32			0.	...	13.25	10.41	130	1.5
-924.71	3168.76	-8.03	0.30		12.79		0.15	146	18.44	10.58	134	41.7
-925.88	3169.07	-8.03	0.30	0.85					15.00	10.44	141	3.4
-925.48	3169.02	-8.05	0.28			0.45			11.69	8.40	161	2.9
-922.09	3167.43	-2.97	...	0.21			0.	...	14.77	10.31	130	0.9
-920.26	2973.83	-1.92	0.44	0.21			0.	...	11.17	8.39	178	1.5
-569.27	1037.74	-4.85	0.54		0.24		0.	...	13.68	8.63	177	1.3
-227.00	2841.97	-13.19	0.33	0.84			0.32	151	13.46	10.17	149	3.9
-226.23	2842.46	-13.19	0.33			0.10			11.21	8.98	131	0.7
-137.66	2913.65	-6.05	0.24		6.46		0.21	10	17.04	10.47	146	23.0
-139.21	2915.32	-6.07	0.26			0.47			11.32	10.76	113	2.4
-137.32	2912.78	-6.13	...	0.16					26.38	10.35	139	0.4
-116.36	2894.01	-6.16	0.30		1.75		0.11	45	13.71	10.42	148	7.8
-114.82	-182.42	-14.25	0.36	5.72			0.16	126	18.69	9.64	5	20.2
-114.69	-182.16	-14.24	0.30			0.38			15.64	9.37	2	1.7
-113.94	-180.52	-16.22	0.33		11.51		0.10	123	19.49	10.03	2	37.4
-113.98	-179.55	-16.21	0.32			0.43			15.24	9.94	25	1.9
-104.08	-168.53	-15.80	...		0.89		0.	...	16.75	9.62	179	3.5
-90.76	2869.63	-6.39	0.41		0.82		0.	...	13.05	9.07	164	4.4
-76.22	2863.41	-6.52	0.40		5.42		0.04	0	15.00	10.52	126	21.8
-76.85	2862.98	-6.48	...			0.10			13.10	10.50	175	0.5
0.10	-0.03	-13.83	0.30		15.80		0.06	97	11.59	9.35	168	92.7
-0.01	-0.14	-13.84	0.29			0.40			11.06	8.70	157	2.6
2.52	-12.32	-11.23	...	0.23			0.	...	13.16	9.61	157	1.1
6.69	-16.29	-14.04	...		1.77		0.	...	17.92	10.21	148	6.2
25.84	-46.08	-11.52	0.27	0.46			0.	...	11.44	9.09	155	2.8
56.08	-75.91	-14.19	0.27		2.42		0.03	45	10.96	9.16	169	15.3
55.97	-76.12	-14.22	...			0.03			10.30	7.81	15	0.2
59.60	21.12	-12.05	0.27	0.67			0.	...	14.25	10.55	175	2.8
59.84	-77.31	-12.29	...	0.23			0.	...	11.66	10.40	179	1.2
61.10	20.56	-14.32	0.23		2.00		0.	...	15.45	10.38	160	7.9
261.64	3168.80	-18.52	0.59	1.32			0.06	90	11.03	8.53	0	8.9
1667 MHz — Beam: 10.61 × 8.43 mas, PA 177°												
-2101.49	3471.31	-5.43	...	0.63			0.	...	19.92	11.19	165	1.8
-2101.30	3474.21	-3.47	0.31		1.22		0.	...	19.21	11.29	167	3.6

Table 16—Continued

Spot Fit Parameters												
$\Delta\theta_x$	$\Delta\theta_y$	Velocity	Δv	RCP	LCP	Lin.	m_L	PPA	Maj.	Min.	PA	T_B
(mas)	(mas)	(km s ⁻¹)	(km s ⁻¹)	Flux Density (Jy)				(°)	(mas)	(mas)	(°)	(10 ⁹ K)
-2025.66	3394.72	-2.98	...		4.74		0.04	45	21.74	10.60	115	13.1
-2020.09	3393.14	-5.26	...	0.79			0.	...	23.77	11.34	118	1.9
-1957.63	2216.36	-12.40	0.30		0.54		0.29	167	15.90	10.47	23	2.1
-1956.98	2215.69	-12.46	...			0.06			14.24	9.31	22	0.3
-1860.12	2286.78	-11.40	...		0.16		0.	...	23.43	10.32	6	0.4
-1859.18	2295.73	-11.05	...	0.24			0.	...	24.06	10.71	11	0.6
-918.18	2971.02	-5.73	0.51	0.29			0.	...	11.44	8.64	178	1.9
-111.49	-183.74	-14.62	0.36	3.59			0.05	161	19.34	10.20	4	11.6
-111.31	-179.81	-14.57	...			0.07			16.47	12.26	171	0.3
-111.43	-183.68	-15.76	0.42		3.88		0.12	144	18.90	10.11	6	12.9
-111.74	-183.97	-15.76	0.29			0.21			16.71	10.03	8	0.7

Table 17. G111.543+0.777 (NGC 7538)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 10.89 × 8.05 mas, PA 166°												
-319.18	314.80	-58.59	...	0.11			0.	...	14.44	9.08	121	0.5
-96.29	-145.16	-60.35	...	0.18			0.	...	11.45	8.34	171	1.2
-8.37	-12.17	-59.80	0.35		2.39		0.49	60	14.35	12.21	32	8.7
-9.54	-12.38	-59.89	0.37	0.96					12.68	11.39	8	4.2
-10.52	-14.14	-59.78	0.55			0.64			13.97	9.44	93	3.3
0.25	-0.04	-59.45	0.30		20.54		0.10	126	12.41	11.33	165	92.9
2.83	0.99	-59.44	0.34	3.32					13.56	12.49	67	12.5
1.73	0.55	-59.50	0.47			0.42			8.59	6.12	4	5.0
8.72	-27.49	-60.17	...		0.43		0.18	90	14.01	9.76	3	2.0
7.92	-27.83	-60.17	...	0.14					14.17	10.27	10	0.6
131.64	-275.37	-59.30	...	0.30			0.32	0	15.63	12.03	131	1.0
153.81	-277.36	-59.30	...	0.14			0.	...	16.84	13.33	63	0.4
176.33	-272.70	-59.47	...	0.30			0.67	135	13.29	11.08	12	1.3
177.54	-271.66	-59.47	...			0.15			15.32	10.51	50	0.6
292.90	-208.19	-59.09	0.30		1.57		0.36	167	15.40	11.18	82	5.8
292.97	-208.68	-59.12	0.30	0.72					18.78	11.09	81	2.2
293.11	-208.49	-59.10	0.32			0.52			22.06	11.18	72	1.4
303.08	100.24	-59.02	0.38		0.58		0.34	37	11.15	9.60	166	3.4
302.41	99.87	-59.04	0.34	0.53					11.36	9.75	167	3.1
306.07	100.19	-59.07	0.35			0.24			21.81	10.21	115	1.0
304.70	84.68	-60.34	0.57	0.20			0.83	94	11.22	8.69	179	1.3
304.42	85.11	-60.39	0.64			0.19			11.12	8.33	172	1.3
305.05	82.70	-60.78	0.55		0.61		0.32	74	11.19	9.05	168	3.8
308.17	-204.92	-59.07	0.33		1.49		0.61	173	12.11	10.89	1	7.2
308.80	-204.48	-59.07	0.32	1.03					12.37	10.77	12	4.9
307.52	-205.17	-59.09	0.31			0.69			11.96	9.81	165	3.7
329.29	119.68	-57.19	...	0.28			0.61	121	11.69	10.53	49	1.4
335.44	119.21	-57.05	0.33		0.49		0.39	151	11.48	8.98	161	3.0
337.55	117.78	-57.47	0.73	0.52			0.48	65	11.73	9.12	169	3.1
338.06	117.41	-57.60	0.38			0.20			11.30	7.67	175	1.4
417.99	-597.49	-57.89	...		0.10		0.95	33	11.31	9.07	155	0.6
416.42	-597.27	-57.89	...	0.09					11.33	7.28	162	0.7
416.50	-595.85	-57.89	...			0.08			11.15	7.93	167	0.6
447.23	-828.78	-58.27	0.32	0.14			0.	...	11.60	10.05	156	0.8
475.63	-498.71	-56.80	0.29		0.33		0.	...	11.13	8.79	172	2.2
477.76	-498.70	-56.66	...	0.10			0.	...	16.15	9.98	41	0.4
649.82	-598.89	-58.24	...	0.12			0.	...	19.51	9.48	154	0.4

Table 17—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux	LCP Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
814.14	654.72	-50.68	...	0.11			0.	...	12.54	8.04	178	0.7
1667 MHz — Beam: 10.88 × 8.04 mas, PA 166°												
-8.17	-1.42	-59.47	...		0.42		0.34	45	18.33	11.63	115	1.3
-0.11	-8.08	-59.80	0.39		0.64		0.66	96	13.90	11.35	62	2.6
3.95	-5.12	-59.82	0.40	0.25					20.06	11.83	73	0.7
-1.37	-9.19	-59.82	0.24			0.21			12.96	10.77	50	0.9
5.45	2.49	-59.45	0.32		0.50		0.30	0	13.46	12.88	22	1.8
8.24	-0.31	-59.65	...	0.21			0.29	45	12.75	11.54	26	0.9
75.86	-11.69	-60.00	...		0.16		0.49	90	12.26	10.29	59	0.8
77.42	-11.13	-60.00	...			0.05			12.65	8.59	135	0.3
110.84	-272.43	-59.30	...	0.11			0.	...	15.58	10.24	145	0.4
130.70	-274.39	-59.30	...	0.36			0.31	0	19.45	12.42	129	1.0
322.78	-201.60	-59.13	0.27		0.34		0.52	71	13.52	12.01	156	1.3
322.60	-202.17	-59.16	0.30	0.28					11.68	8.98	164	1.7
323.09	-201.15	-59.14	0.24			0.13			11.49	9.21	28	0.8
400.38	53.98	-59.46	0.37	0.14			0.	...	12.13	9.77	173	0.7

Table 18. G196.454–1.677 (S269)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP Flux Density	Lin. (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 12.77 × 6.19 mas, PA 172°												
-369.13	-80.28	16.88	...		0.60		0.	...	12.85	9.22	179	3.2
-352.16	-90.77	14.42	...	0.26			0.	...	13.67	8.66	169	1.4
-348.50	-92.55	15.22	0.31	0.97			0.19	90	14.78	7.10	164	5.8
-338.81	-94.21	14.90	0.26	2.61			0.07	29	13.50	7.59	168	16.2
-328.89	-62.48	14.35	0.29	3.43			0.05	45	13.98	8.74	177	17.9
-328.74	-59.32	14.42	...			0.06			11.17	6.63	172	0.5
-328.30	-62.66	16.69	0.27		0.63		0.	...	15.15	8.30	169	3.2
-275.65	-130.04	14.42	...	0.23			0.	...	14.43	8.04	162	1.3
-272.54	-151.18	14.42	...	0.15			0.	...	12.93	6.23	172	1.2
-263.87	-44.31	14.24	...	0.32			0.	...	11.51	8.87	1	2.0
-252.22	-139.81	14.41	0.27	0.61			0.	...	14.18	9.49	163	2.9
-169.43	-116.17	13.88	0.25	0.63			0.	...	13.09	10.13	174	3.0
-5.70	-9.92	15.82	...		1.39		0.16	90	13.46	6.50	175	10.1
-0.05	-0.04	15.96	0.34		13.14		0.08	32	13.68	7.01	179	87.1
-1.49	-2.37	15.87	0.42			0.70			14.25	9.03	167	3.7
-0.65	-2.06	15.82	...	0.50					16.16	11.44	159	1.7
7.37	-62.39	16.84	0.29		4.64		0.27	174	14.65	7.84	178	25.7
7.33	-61.70	16.84	0.27			0.49			13.69	6.15	169	3.8
6.66	-63.15	16.87	0.31	0.17					11.79	6.19	179	1.5
17.83	-65.44	16.70	...		0.23		0.56	135	13.21	6.55	176	1.7
17.08	-67.36	16.70	...			0.06			12.89	7.36	162	1.0
22.48	99.26	17.76	...		0.11		0.	...	12.79	6.01	174	0.9
1667 MHz — Beam: 12.84 × 6.12 mas, PA 172°												
-170.52	-116.24	14.40	0.27	1.97			0.	...	13.99	10.30	163	8.7
-168.84	-114.61	16.00	...		0.52		0.	...	15.64	11.39	158	1.9
-5.82	-15.58	15.30	...		0.18		0.	...	18.81	8.97	14	0.7

Table 19. G213.706–12.60 (Mon R2)

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density	LCP (Jy)	Lin.	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 15.39 × 9.05 mas, PA 169°												
-286.62	124.72	9.11	0.30			0.53	1.00	122	21.51	18.34	176	0.9
-288.04	129.37	9.12	...	0.37					21.88	12.12	158	0.9
-83.57	136.05	8.87	0.33		3.14		0.53	111	15.96	10.88	171	11.5
-83.03	135.93	8.89	0.37			0.98			16.19	11.52	166	3.3
-82.71	135.54	8.90	0.70	0.19					16.06	9.32	171	0.8
-79.54	-41.53	9.47	...	0.67			0.	...	15.20	9.44	176	3.0
-79.21	132.87	15.63	0.35	0.40			0.	...	15.72	9.94	179	1.6
-75.67	-32.19	9.63	0.46	1.30			0.	...	17.29	12.31	2	3.9
-35.31	-25.42	10.88	...		1.76		0.	...	20.07	15.63	35	3.6
-30.97	-21.30	9.47	...	1.98			0.	...	15.79	12.17	0	6.6
-20.69	98.15	10.53	...	0.12			0.	...	16.59	9.44	171	0.5
-14.12	-10.97	11.10	0.30		0.89		0.	...	17.10	12.55	169	2.6
-3.31	-3.97	11.05	...		1.32		0.	...	18.44	14.33	31	3.2
0.17	0.24	9.53	0.27	16.99			0.36	13	19.27	16.67	51	33.6
1.29	-0.01	9.54	0.25			2.42			17.43	13.89	152	6.4
1.38	0.54	9.47	...		0.86				18.41	13.13	0	2.3
17.81	2.27	9.59	0.24	6.20			0.34	69	18.93	14.11	133	14.8
20.14	1.50	9.59	0.27			0.84			17.09	12.40	79	2.5
368.53	208.21	11.41	...		0.21		0.	...	17.47	11.11	162	0.7
399.73	106.32	10.77	0.32		0.44		0.	...	17.65	12.70	179	1.2
403.64	110.67	9.46	0.33	2.57			0.	...	16.70	12.68	6	7.7
1667 MHz — Beam: 15.38 × 9.04 mas, PA 169°												
-221.37	-23.82	10.53	...		0.17		0.	...	14.86	11.74	6	0.6
-219.67	-21.62	9.65	...	0.21			0.	...	19.90	9.96	177	0.7
-200.75	-23.97	10.88	...		0.34		0.33	45	16.54	11.72	174	1.1
-34.23	-30.68	10.53	...		0.10		0.	...	15.65	9.21	0	0.4
-33.32	-30.45	9.65	0.26	1.57			0.	...	15.80	13.07	172	4.8
-11.24	-15.99	9.82	...	0.29			0.	...	16.85	12.34	14	0.9
9.52	-9.85	9.65	...	0.75			0.23	135	16.32	13.23	154	2.2
19.28	-1.83	9.83	0.26	0.58			0.	...	15.67	12.40	149	1.9
20.52	-13.84	9.65	...	0.28			0.	...	27.27	10.95	175	0.6
306.55	30.91	9.65	...		0.36		0.	...	17.45	11.52	1	1.1
367.83	76.45	9.37	0.28	0.48			0.	...	17.08	11.12	164	1.6
371.70	72.73	10.15	0.34		0.39		0.	...	16.01	11.81	0	1.3

Table 20. G351.775–0.538

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin.	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
1665 MHz — Beam: 108.63 × 36.38 mas, PA 17°												
-1726.73	1181.11	-1.79	0.47	28.69			0.25	135	113.96	71.23	19	2.2
-1724.49	1186.44	-1.76	...			2.42			121.99	58.27	25	0.2
-1636.90	-817.70	-0.35	...	2.70			0.55	61	114.29	79.78	26	0.2
-1634.92	-814.69	-0.35	...			0.64			111.54	72.65	19	0.0
-1582.55	1214.59	7.03	...		4.67		0.48	94	111.63	85.34	21	0.3
-1584.56	1221.76	6.97	0.45	4.59					112.21	84.00	13	0.3
-1579.83	1213.40	7.03	...			2.26			111.52	85.02	22	0.2
-1570.90	1199.73	6.11	0.67		3.05		0.23	135	110.43	80.49	20	0.2
-1575.86	1203.19	6.03	0.60	1.91					111.46	82.02	14	0.1
-1322.32	911.63	1.76	...		2.97		0.92	157	112.98	72.08	27	0.2
-1322.03	914.83	1.76	...			2.05			112.58	76.97	25	0.1
-1057.20	-1102.77	-0.95	0.70		5.42		0.31	16	115.18	73.61	16	0.4
-1062.10	-1120.89	-1.05	...			0.77			115.50	62.82	23	0.1
-860.52	2506.33	-3.87	...		0.31		0.	...	109.12	55.06	9	0.0
-810.95	-1820.16	3.52	...	1.81			0.	...	112.22	74.19	17	0.1
-529.03	-517.78	3.16	...		0.33		0.	...	115.66	56.22	17	0.0
-518.36	-528.29	1.18	0.60	5.35			0.	...	114.02	77.98	16	0.4
-518.29	-524.34	1.21	0.69		4.15			...	112.07	70.27	16	0.3
-507.60	-538.38	3.19	0.57	1.38			0.	...	112.33	72.95	7	0.1
-400.93	-965.11	2.81	...	0.46			0.	...	112.81	46.82	16	0.1
-362.16	-297.45	4.26	0.54	5.60			0.	...	114.15	76.08	30	0.4
-288.63	-241.54	1.05	...		1.58		0.	...	106.07	59.74	16	0.2
-257.91	1548.08	-7.26	0.46	10.41			0.	...	112.01	76.09	20	0.8
-174.40	1753.44	-6.44	0.61		22.77		0.	...	113.80	78.06	28	1.6
-177.71	1761.14	-6.33	...	0.88				...	119.24	72.58	26	0.1
-105.33	70.96	1.99	0.45	9.33			0.	...	112.29	75.81	27	0.7
-102.80	73.62	3.87	...	3.81			0.34	115	111.14	69.77	20	0.3
-52.90	1468.59	5.25	0.40	6.98			0.	...	114.11	81.21	27	0.5
0.28	0.08	-1.98	0.61		433.60		0.51	95	113.20	77.11	28	31.6
-1.35	2.13	-1.92	0.62			147.32			113.75	77.16	26	10.7
-2.97	1.98	-1.87	0.43	131.26					113.04	75.56	25	9.8
19.74	-211.37	-0.35	...		5.97		0.07	90	116.63	75.33	33	0.4
262.10	-745.58	2.46	...	0.90			0.	...	116.69	65.68	23	0.1
264.20	661.00	-7.38	...		10.17		0.33	70	111.75	77.78	25	0.7
262.60	667.96	-7.38	...			1.57			112.89	73.92	24	0.1
265.84	649.02	-4.22	...	0.46			0.	...	117.11	55.18	18	0.0

Table 20—Continued

$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	Δv (km s ⁻¹)	RCP Flux Density (Jy)	LCP Flux Density (Jy)	Lin. Flux Density (Jy)	m_L	PPA (°)	Spot Fit Parameters			T_B (10 ⁹ K)
									Maj. (mas)	Min. (mas)	PA (°)	
958.28	1205.65	-5.29	0.58		8.52		0.05	0	114.05	85.36	29	0.6
964.90	1135.53	-6.87	0.49		26.70		0.11	59	113.62	84.04	23	1.8
959.65	1132.05	-7.03	...			1.33			112.47	79.86	29	0.1
991.13	1149.70	-10.34	0.83	2.31			0.	...	112.42	86.63	27	0.2
1419.50	1505.44	-5.63	...		2.71		0.24	135	117.45	65.44	16	0.2
1423.55	1544.22	-7.76	0.38	9.07			0.62	118	113.53	74.55	25	0.7
1424.38	1540.03	-7.73	...			3.36			114.54	78.06	26	0.2
1482.21	1415.95	-8.09	...	2.37			0.95	97	113.25	68.47	26	0.2
1487.04	1421.69	-8.06	0.44			1.86			113.60	71.08	23	0.1
1514.51	1429.14	-6.54	0.68	2.24			0.35	73	127.65	76.55	35	0.1
1520.69	1439.75	-6.67	0.60			1.17			112.59	65.91	21	0.1
1796.42	1507.64	-9.19	0.54		31.55		0.82	106	114.81	77.89	29	2.2
1796.31	1507.42	-9.25	0.38			17.34			114.13	75.14	24	1.3
1793.19	1509.86	-9.24	0.42	12.82					116.07	75.07	26	0.9
1667 MHz — Beam: 108.63 × 36.38 mas, PA 17°												
-2570.78	1520.31	-2.11	...	0.33			0.	...	113.65	55.14	18	0.0
-1766.29	-717.36	-0.72	0.62		3.03		0.	...	114.63	75.16	25	0.2
-1648.48	-788.40	0.35	0.55		1.37		0.40	135	115.79	88.01	29	0.1
-1645.24	-813.41	-0.05	0.56	1.42			0.	...	115.49	70.12	23	0.1
-1217.75	3130.96	-0.38	0.51		1.44		0.	...	121.93	70.00	11	0.1
-1035.66	-1804.94	4.57	...	0.25			0.40	90	111.79	50.13	19	0.0
251.53	-758.83	2.11	...	0.46			0.	...	106.79	55.66	13	0.0
260.32	669.82	-6.95	0.60		27.33		0.11	71	113.33	79.90	30	1.9
261.67	674.50	-7.09	0.45			1.35			112.33	72.11	25	0.1
264.08	686.99	-7.02	...	0.35					115.50	58.96	17	0.0
261.86	-752.34	0.70	...		0.67		0.	...	108.04	58.74	17	0.1
263.94	653.70	-4.99	0.50	1.41			0.	...	110.33	75.67	22	0.1
353.44	2805.33	-8.08	...	0.32			0.	...	119.69	78.19	20	0.0
442.16	2207.06	-5.52	0.57		6.03		0.	...	114.84	77.25	23	0.4
441.63	2196.97	-5.62	...	1.50					114.69	71.91	25	0.1
651.62	-187.70	-1.05	...		0.57		0.	...	113.12	63.84	21	0.1
1025.86	1126.84	-9.05	0.56	0.86			0.	...	114.93	67.14	26	0.1
1026.09	1110.93	-7.73	...		1.58		0.	...	112.35	89.85	27	0.1
1750.24	1615.33	-9.83	...		0.85		0.57	0	115.44	63.66	20	0.1
1797.06	1496.68	-7.37	...		1.93		0.22	135	117.57	70.29	21	0.1
1800.56	1502.77	-8.80	0.47	5.38			0.78	61	117.64	72.87	23	0.4
1806.46	1527.07	-8.78	...		3.30				125.06	68.84	18	0.2
1803.70	1510.54	-8.78	...			3.29			118.58	72.39	21	0.2

Table 21. Zeeman Pairs

Freq. (MHz)	RCP			LCP			B (mG)	Separation ^a		
	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)		Ang. (mas)	Lin. (AU)	
G5.886−0.393										
1665	-3788.01	-543.00	12.70	-3787.36	-541.27	13.58	-1.5	1.8	7.0	
	-3756.53	-652.25	3.39	-3751.13	-650.52	5.14	-3.0	5.7	21.5	
	-2703.76	13.02	7.25	-2704.79	9.07	6.55	1.2	4.1	15.5	
	-472.17	-1167.17	10.42	-474.36	-1166.64	11.82	-2.4	2.3	8.6	
	18.17	1236.27	9.19	14.79	1246.79	8.31	1.5	11.0	42.0	
	64.59	1231.39	9.71	63.93	1221.82	8.66	1.8	9.6	36.5	
	114.16	1303.90	10.44	114.44	1302.80	9.52	1.6	1.1	4.3	
	115.14	1238.17	10.42	117.46	1235.15	9.54	1.5	3.8	14.5	
1667	-3759.89	-535.50	12.65	-3758.15	-537.30	13.34	-2.0	2.5	9.5	
	-3346.47	-876.69	4.45	-3359.09	-884.92	4.88	-1.2	15.1	57.3	
	-3338.45	-872.53	4.63	-3336.61	-862.43	5.15	-1.5	10.3	39.0	
	38.43	1204.77	8.86	31.76	1209.68	8.34	1.5	8.3	31.5	
	74.69	1218.60	9.54	68.45	1220.72	8.84	2.0	6.6	25.0	
	125.79	1207.47	10.14	127.95	1209.01	9.72	1.2	2.7	10.1	
	131.02	1295.51	10.27	129.29	1296.34	9.75	1.5	1.9	7.3	
	G9.622+0.195									
1665	-3182.04	10961.23	4.87	-3182.87	10961.43	1.77	5.3	0.9	4.9	
1667	-3824.96	12000.75	0.55	-3819.86	12001.15	-1.63	6.2	5.1	29.2	
	-1561.24	6803.55	4.31	-1559.61	6803.67	4.78	-1.3	1.6	9.3	
	-1442.63	7027.35	4.95	-1443.70	7017.45	5.21	-0.7	10.0	56.8	
G10.624−0.385										
1667	2025.07	-75.82	0.05	2027.01	-76.97	2.16	-6.0	2.3	10.8	
G34.257+0.154										
1665	-1573.48	2635.98	60.29	-1575.41	2635.68	62.72	-4.1	2.0	7.4	
	-992.48	-1539.72	55.83	-995.45	-1538.10	54.66	2.0	3.4	12.9	
	-380.10	1276.71	51.58	-385.44	1284.18	53.96	-4.0	9.2	34.9	
	-46.06	-1080.46	54.31	-37.90	-1081.48	54.75	-0.7	8.2	31.2	
	0.45	0.00	58.17	-2.78	3.42	61.16	-5.1	4.7	17.9	
	11.21	2.75	58.00	13.89	15.49	61.52	-6.0	13.0	49.5	
	23.95	-60.09	58.26	42.65	-39.24	61.64	-5.7	28.0	106.4	
	93.63	1980.47	62.75	95.65	1977.55	59.95	4.7	3.6	13.5	
	401.35	1807.51	59.59	402.61	1808.54	56.42	5.4	1.6	6.2	
	425.30	1816.93	58.67	424.97	1816.90	55.54	5.3	0.3	1.3	
	461.83	1821.28	59.21	462.01	1821.36	55.95	5.5	0.2	0.7	
	500.83	1852.41	58.88	499.32	1851.51	55.71	5.4	1.8	6.7	
	552.07	1870.03	59.20	552.32	1869.66	55.94	5.5	0.4	1.7	
	587.57	2514.56	59.83	587.38	2514.75	64.40	-7.7	0.3	1.0	
	1667	-1574.17	2634.87	60.84	-1575.04	2635.08	62.30	-4.1	0.9	3.4

Table 21—Continued

Freq. (MHz)	RCP			LCP			B (mG)	Separation ^a	
	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)		Ang. (mas)	Lin. (AU)
	-986.11	-1540.31	56.42	-986.12	-1538.70	55.89	1.5	1.6	6.1
	-790.53	-1660.57	57.65	-786.54	-1656.13	58.04	-1.1	6.0	22.7
	-381.62	1275.84	52.04	-383.22	1278.99	53.46	-4.0	3.5	13.4
	-12.34	18.15	58.52	-8.20	8.80	58.72	-0.6	10.2	38.9
G35.577–0.029									
1665	-68.60	149.86	44.90	-69.96	150.71	48.59	-6.3	1.6	16.8
	-33.00	16.46	47.45	-49.01	16.03	49.91	-4.0	16.0	168.2
	-3.86	5.86	49.04	-2.76	5.84	51.87	-4.8	1.1	11.6
G40.622–0.137									
1665	0.03	0.93	29.09	-0.76	-1.12	32.58	-5.9	2.2	4.8
1667	-0.90	-0.58	29.80	-0.69	0.04	31.98	-6.2	0.7	1.4
G43.796–0.127									
1665	-629.25	-66.83	46.04	-632.17	-64.08	44.46	2.7	4.0	36.1
	-598.31	354.84	40.17	-597.94	354.49	41.70	-2.6	0.5	4.6
	-397.34	566.10	39.76	-398.80	570.36	39.01	1.3	4.5	40.5
	-394.79	645.12	40.59	-392.82	644.02	37.96	4.5	2.3	20.3
	-35.30	196.36	44.11	-37.45	199.71	44.48	-0.6	4.0	35.8
	7.40	48.49	40.92	8.28	33.43	39.28	2.8	15.1	135.8
1667	4.58	2.82	43.03	1.27	1.76	41.92	3.1	3.5	31.3
G49.488–0.387 (W51 e1)									
1665	-1962.45	790.06	61.76	-1960.92	787.90	62.55	-1.3	2.6	18.5
	-1939.01	783.58	61.76	-1939.01	784.02	62.45	-1.2	0.4	3.1
	-1918.67	831.44	62.34	-1917.78	832.80	63.52	-2.0	1.6	11.4
	-1827.57	-382.77	54.02	-1828.04	-382.21	50.86	5.4	0.7	5.1
	-1823.68	-354.45	52.62	-1823.82	-356.92	49.07	6.0	2.5	17.3
	-571.98	1211.03	55.90	-568.40	1212.03	60.00	-6.9	3.7	26.0
	-370.32	-1842.75	60.35	-365.22	-1840.03	57.19	5.4	5.8	40.5
	-238.12	-1771.26	61.44	-229.60	-1781.19	58.59	4.8	13.1	91.6
	-135.48	-804.71	62.76	-129.52	-803.94	61.41	2.3	6.0	42.1
	-2.74	4.06	58.10	-0.73	4.97	58.48	-0.6	2.2	15.4
	21.43	17.42	58.24	23.00	8.24	60.00	-3.0	9.3	65.2
	127.04	244.75	59.30	132.25	247.30	61.59	-3.9	5.8	40.6
1667	-1842.51	797.63	61.05	-1872.86	802.16	62.11	-3.0	30.7	214.8
	-567.62	1207.31	56.81	-567.77	1207.51	59.30	-7.0	0.2	1.7
	-362.31	-1841.80	60.00	-361.89	-1840.84	57.89	6.0	1.0	7.3
	-113.71	-813.89	62.11	-116.01	-810.77	61.36	2.1	3.9	27.1
	68.68	-42.42	60.75	60.24	-38.84	61.98	-3.5	9.2	64.2
	129.37	243.68	60.08	131.84	245.03	61.15	-3.0	2.8	19.7
	149.64	4.15	61.40	159.13	7.25	62.46	-3.0	10.0	69.9
	208.88	26.17	62.81	207.47	27.15	63.51	-2.0	1.7	12.0

Table 21—Continued

Freq. (MHz)	RCP			LCP			B (mG)	Separation ^a	
	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)		Ang. (mas)	Lin. (AU)
	443.26	-349.87	62.81	442.32	-348.92	62.11	2.0	1.3	9.4
	458.49	-332.26	62.11	456.98	-328.73	61.89	0.6	3.8	26.9
	530.83	-338.92	61.76	534.12	-352.11	61.26	1.4	13.6	95.2
	550.13	-327.07	61.05	549.60	-322.42	60.69	1.0	4.7	32.8
G49.488–0.387 (W51 e2)									
1665	-1084.52	5233.29	56.95	-1086.88	5235.83	54.55	4.1	3.5	24.3
	-1072.82	5262.07	59.97	-1072.59	5262.24	57.59	4.0	0.3	2.0
	-860.54	5587.76	60.79	-860.72	5587.70	57.47	5.6	0.2	1.3
	-700.92	6169.66	64.25	-701.30	6170.35	51.85	21.0	0.8	5.5
	-698.80	6200.06	67.58	-698.81	6200.49	55.87	19.8	0.4	3.0
	-450.50	6630.77	71.65	-451.35	6632.12	69.08	4.4	1.6	11.2
	-237.46	6523.25	70.20	-238.12	6522.74	67.70	4.2	0.8	5.8
	-24.82	5487.11	57.19	-24.85	5487.18	51.56	9.5	0.1	0.5
	101.06	5732.59	50.16	101.61	5732.11	46.60	6.0	0.7	5.1
1667	-1096.37	5273.50	61.76	-1096.86	5274.00	60.30	4.1	0.7	4.9
	-1086.47	5315.68	61.05	-1086.30	5315.65	59.52	4.3	0.2	1.2
	-1082.37	5306.58	63.32	-1082.21	5308.19	61.93	3.9	1.6	11.3
	-1070.32	5260.63	60.00	-1069.43	5261.93	58.60	4.0	1.6	10.9
	-1036.95	5357.07	62.11	-1039.06	5355.93	60.63	4.2	2.4	16.8
	-1010.07	5347.13	62.46	-1011.76	5348.27	60.82	4.6	2.0	14.3
	-891.88	6646.28	72.32	-891.72	6646.94	70.13	6.2	0.7	4.8
	-445.45	6626.89	70.89	-445.97	6636.15	69.72	3.3	9.3	64.9
	-236.76	6517.98	69.83	-237.21	6518.41	68.43	4.0	0.6	4.4
	-225.02	6717.59	68.71	-220.14	6716.56	65.27	9.7	5.0	34.9
	100.07	5726.98	49.11	99.37	5727.64	47.32	5.1	1.0	6.7
	125.21	5780.95	48.79	124.30	5783.05	46.90	5.3	2.3	16.0
	150.16	5801.54	49.11	150.60	5799.00	47.01	5.9	2.6	18.0
G69.540–0.976 (ON 1)									
1665	-331.84	100.12	13.41	-332.23	101.05	16.22	-4.8	1.0	3.0
	-258.36	100.05	13.76	-259.15	100.37	16.74	-5.1	0.9	2.6
	-254.88	87.64	13.44	-255.04	88.31	16.47	-5.1	0.7	2.1
	-249.93	103.39	13.76	-249.71	103.33	16.75	-5.1	0.2	0.7
	-237.57	97.87	13.72	-234.14	98.05	16.33	-4.4	3.4	10.3
	-215.20	91.23	13.76	-212.78	81.14	15.86	-3.6	10.4	31.1
	-0.01	-0.01	12.83	16.16	5.06	14.29	-2.5	16.9	50.8
	30.84	532.50	13.16	26.51	529.67	14.29	-1.9	5.2	15.5
	36.98	527.65	13.15	38.17	527.69	13.84	-1.2	1.2	3.6
	150.33	-4.44	14.03	152.17	-5.38	15.01	-1.7	2.1	6.2
1667	160.68	-13.07	14.31	161.28	-12.53	14.64	-0.9	0.8	2.4
G70.293+1.601 (K3–50)									
1665	-92.11	-572.10	-21.99	-108.32	-590.68	-17.59	-7.5	24.7	214.5
	-5.73	0.08	-21.32	-0.16	0.50	-19.76	-2.6	5.6	48.6
	279.38	151.91	-20.93	281.37	150.97	-19.31	-2.7	2.2	19.1

Table 21—Continued

Freq. (MHz)	RCP			LCP			B (mG)	Separation ^a	
	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)		Ang. (mas)	Lin. (AU)
1667	1737.41	-1922.17	-22.35	1742.24	-1918.48	-20.79	-2.7	6.1	52.9
	1740.92	-1926.51	-23.15	1741.48	-1924.21	-21.42	-2.9	2.4	20.6
	-0.04	3.94	-21.05	0.53	3.66	-20.15	-2.6	0.6	5.5
G75.782+0.343 (ON 2 N)									
1665	-105.67	-805.00	-4.45	-104.91	-803.41	-7.16	4.6	1.8	9.9
	16.67	17.50	-1.02	7.14	21.86	-2.81	3.0	10.5	58.7
	19.54	-33.11	-2.16	25.74	-16.87	-5.46	5.6	17.4	97.3
1667	49.74	-4.83	-0.51	49.22	-7.87	-3.39	4.9	3.1	17.3
	148.13	-197.56	-4.31	150.79	-195.88	-6.70	4.1	3.1	17.6
	-3.48	-2.68	-4.48	-2.54	-3.88	-5.41	2.6	1.5	8.5
	12.45	-75.91	-7.18	16.81	-78.22	-8.93	4.9	4.9	27.6
	19.28	1499.98	-3.74	30.11	1498.41	-4.97	3.5	10.9	61.3
	25.07	-22.85	-3.21	28.40	-18.55	-4.97	5.0	5.4	30.5
	150.24	-215.43	-6.02	150.50	-205.72	-6.90	2.5	9.7	54.4
	152.67	-245.58	-6.90	148.94	-255.85	-7.48	1.6	10.9	61.2
G81.721+0.571 (W75 S)									
1665	-465.11	447.67	2.53	-451.74	446.26	-0.75	5.6	13.4	26.9
	-444.08	476.30	2.98	-428.50	442.87	-0.36	5.7	36.9	73.8
	-384.46	369.61	4.72	-383.91	370.38	0.99	6.3	0.9	1.9
1667	-378.59	339.82	4.53	-379.03	339.26	0.64	6.6	0.4	0.9
	-371.02	386.86	5.21	-373.50	390.49	1.36	6.4	4.4	8.8
	-364.77	317.90	4.69	-361.40	321.67	1.12	6.1	5.1	10.1
	1277.74	1429.81	-4.60	1277.85	1429.48	-0.10	-7.6	0.3	0.7
	1442.81	-387.11	-2.97	1445.25	-385.01	-0.45	-4.4	3.2	6.4
	1452.60	-372.65	-2.02	1458.07	-366.77	1.12	-5.3	8.0	16.1
	1487.21	-385.34	-4.09	1488.14	-385.33	-1.39	-4.6	0.9	1.9
	1497.81	-383.25	-4.43	1507.31	-381.26	-1.45	-5.1	9.7	19.4
	1518.41	-377.68	-3.38	1517.68	-378.38	-1.12	-3.8	1.0	2.0
	1656.16	-42.55	-3.92	1656.63	-41.83	-1.26	-4.4	0.9	1.7
G81.871+0.781 (W75 N)									
1665	0.01	0.02	12.42	0.19	0.40	9.31	5.3	0.4	0.8
	118.89	-71.52	9.44	91.71	-72.40	13.67	-7.2	27.2	54.4
	124.99	-74.92	9.93	133.40	-65.99	12.69	-4.7	12.3	24.5
1667	195.51	593.70	9.01	193.69	580.10	5.27	6.3	13.7	27.4
	203.56	672.89	8.98	204.05	672.55	4.37	7.6	0.6	1.2
	230.37	579.37	10.12	230.46	580.81	5.36	8.1	1.4	2.9
	300.58 ^b	1145.27	7.31	282.57	1112.31	4.05	5.5	37.6	75.1
	488.65	1345.80	7.21	488.85	1345.56	5.14	3.5	0.3	0.6
	547.14	1489.04	6.17	550.86	1494.74	3.66	4.3	6.8	13.6
	1784.83	-598.31	12.16	1760.81	-592.27	16.50	-7.4	24.8	49.5
	0.72	-0.27	11.90	1.46	-0.20	10.18	4.9	0.7	1.5
	207.63	672.66	8.10	207.38	673.45	5.40	7.6	0.8	1.7
	748.88	-140.07	-0.15	747.48	-140.38	1.34	-4.2	1.4	2.9

Table 21—Continued

Freq. (MHz)	RCP			LCP			B (mG)	Separation ^a	
	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)		Ang. (mas)	Lin. (AU)
	1785.43	-584.17	12.92	1782.96	-582.82	15.37	-6.9	2.8	5.6
	1833.01	-561.14	12.63	1830.90	-562.83	14.92	-6.5	2.7	5.4
G109.871+2.114 (Cep A)									
1665	-1780.58	-55.54	-10.88	-1781.99	-55.69	-8.60	-3.9	1.4	1.0
	-1746.60	31.84	-11.00	-1747.40	31.93	-8.55	-4.2	0.8	0.6
	-1730.01	-17.64	-11.73	-1730.51	-16.98	-8.95	-4.7	0.8	0.6
	-1721.13	-20.28	-11.40	-1718.90	-20.39	-8.14	-5.5	2.2	1.6
	-1689.13	33.50	-10.70	-1688.63	33.56	-7.79	-4.9	0.5	0.4
	-1273.20	3341.25	-0.67	-1286.98	3362.94	-6.78	10.4	25.7	18.0
	-922.09	3167.43	-2.97	-924.71	3168.76	-8.03	8.6	2.9	2.1
	-114.82	-182.42	-14.25	-113.94	-180.52	-16.22	3.3	2.1	1.5
	2.52	-12.32	-11.23	0.10	-0.03	-13.83	4.4	12.5	8.8
	59.60	21.12	-12.05	61.10	20.56	-14.32	3.9	1.6	1.1
	59.84	-77.31	-12.29	56.08	-75.91	-14.19	3.2	4.0	2.8
1667	-2101.49	3471.31	-5.43	-2101.30	3474.21	-3.47	-5.5	0.2	0.2
	-2020.09	3393.14	-5.26	-2025.66	3394.72	-2.98	-6.4	5.8	4.1
	-111.49	-183.74	-14.62	-111.43	-183.68	-15.76	3.2	0.1	0.1
G111.543+0.777 (NGC 7538)									
1665	304.70	84.68	-60.34	305.05	82.70	-60.78	0.7	2.0	5.6
G196.454–1.677 (S269)									
1665	-352.16	-90.77	14.42	-369.13	-80.28	16.88	-4.2	20.0	75.8
	-328.89	-62.48	14.35	-328.30	-62.66	16.69	-4.0	0.6	2.3
1667	-170.52	-116.24	14.40	-168.84	-114.61	16.00	-4.5	2.3	8.9
G213.706–12.60 (Mon R2)									
1665	-30.97	-21.30	9.47	-35.31	-25.42	10.88	-2.4	5.3	4.8
	0.17	0.24	9.53	-3.31	-3.97	11.05	-2.6	5.5	4.9
	403.64	110.67	9.46	399.73	106.32	10.77	-2.2	5.8	5.3
1667	-219.67	-21.62	9.65	-221.37	-23.82	10.53	-2.5	2.8	2.5
	-33.32	-30.45	9.65	-34.23	-30.68	10.53	-2.5	0.9	0.7
	367.83	76.45	9.37	371.70	72.73	10.15	-2.2	5.4	4.8
G351.775–0.538 ^c									
1665	-362.16	-297.45	4.26	-288.63	-241.54	1.05	5.4	92.4	203.2
	265.84	649.02	-4.22	264.20	661.00	-7.38	5.4	12.1	26.6
	991.13	1149.70	-10.34	964.90	1135.53	-6.87	-5.9	29.8	65.6
	1423.55	1544.22	-7.76	1419.50	1505.44	-5.63	-3.6	39.0	85.8
1667	251.53	-758.83	2.11	261.86	-752.34	0.70	4.0	12.2	26.8
	263.94	653.70	-4.99	260.32	669.82	-6.95	5.5	16.5	36.3

Table 21—Continued

Freq. (MHz)	RCP			LCP			B (mG)	Separation ^a	
	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)	$\Delta\theta_x$ (mas)	$\Delta\theta_y$ (mas)	Velocity (km s ⁻¹)		Ang. (mas)	Lin. (AU)
	1025.86	1126.84	-9.05	1026.09	1110.93	-7.73	-3.7	15.9	35.0

^aAngular and linear separation between LCP and RCP components of Zeeman pair. Pairs whose separation is much greater than ~ 70 AU may be less reliable indicators of magnetic field strength and direction than the others.

^bZeeman triplet.

^cThe listed separations for G351.775–0.538 may be overestimates due to the large synthesized beam.

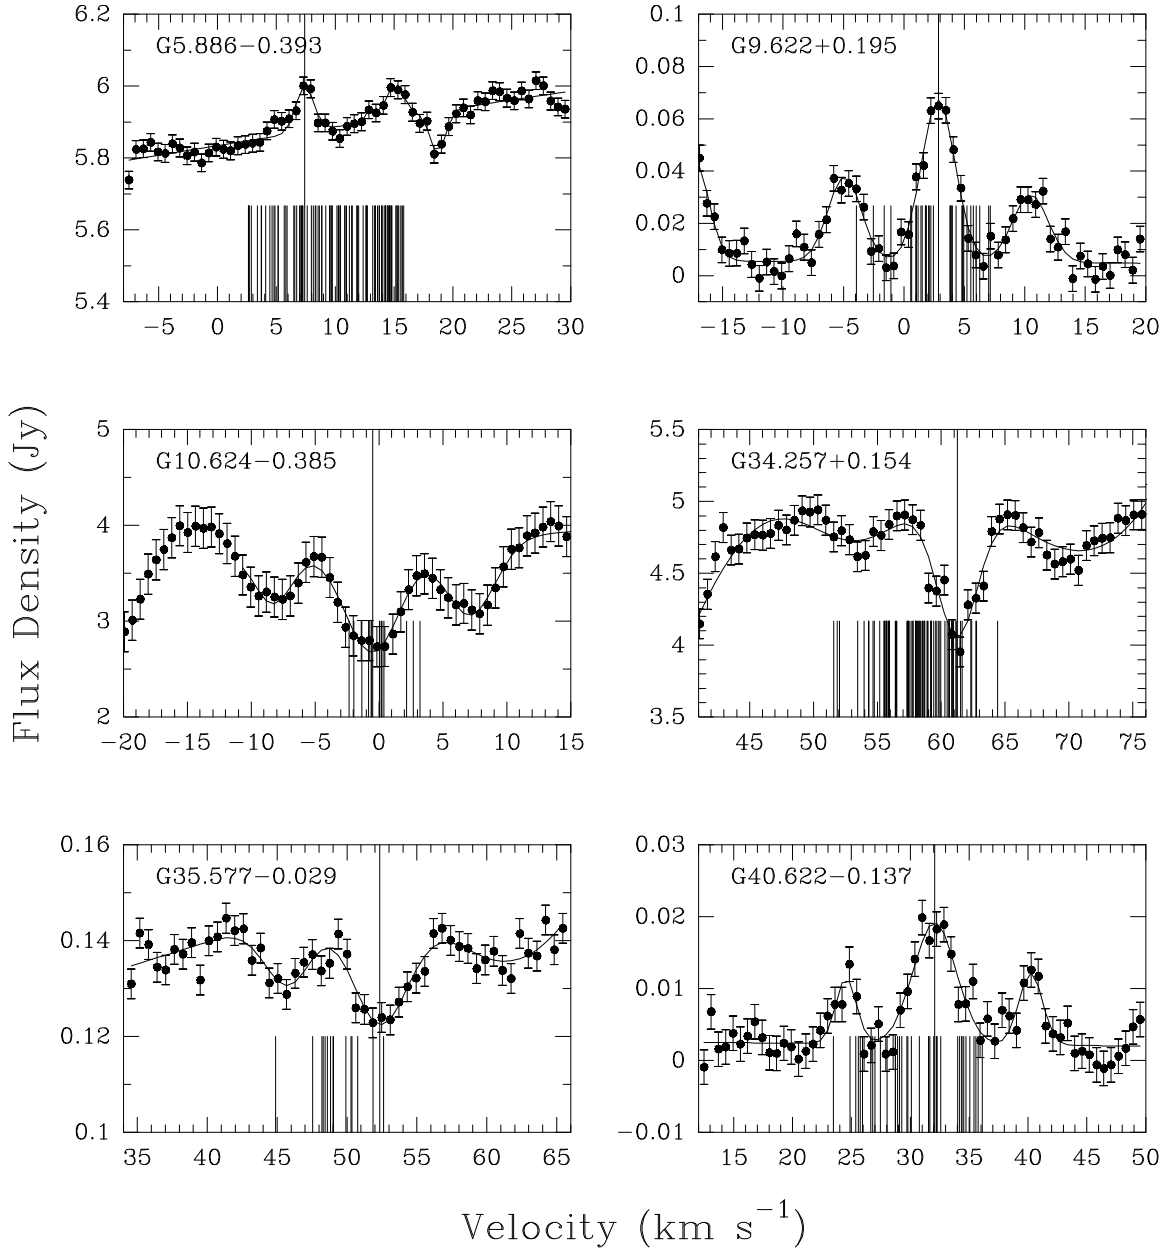


Fig. 40.— Spectra of (1,1) transition of NH_3 for six sources. Data points are shown with approximate errorbars. Linear or quadratic baselines were fitted, and then Gaussians were fitted the absorption or emission. The velocity of the main hyperfine transition is indicated with a vertical bar across each box. OH maser velocities are plotted as shorter vertical lines at the bottom of each box. Only the OH masers in Insets 1 and 2 of Figure 5 are shown in the upper right plot.

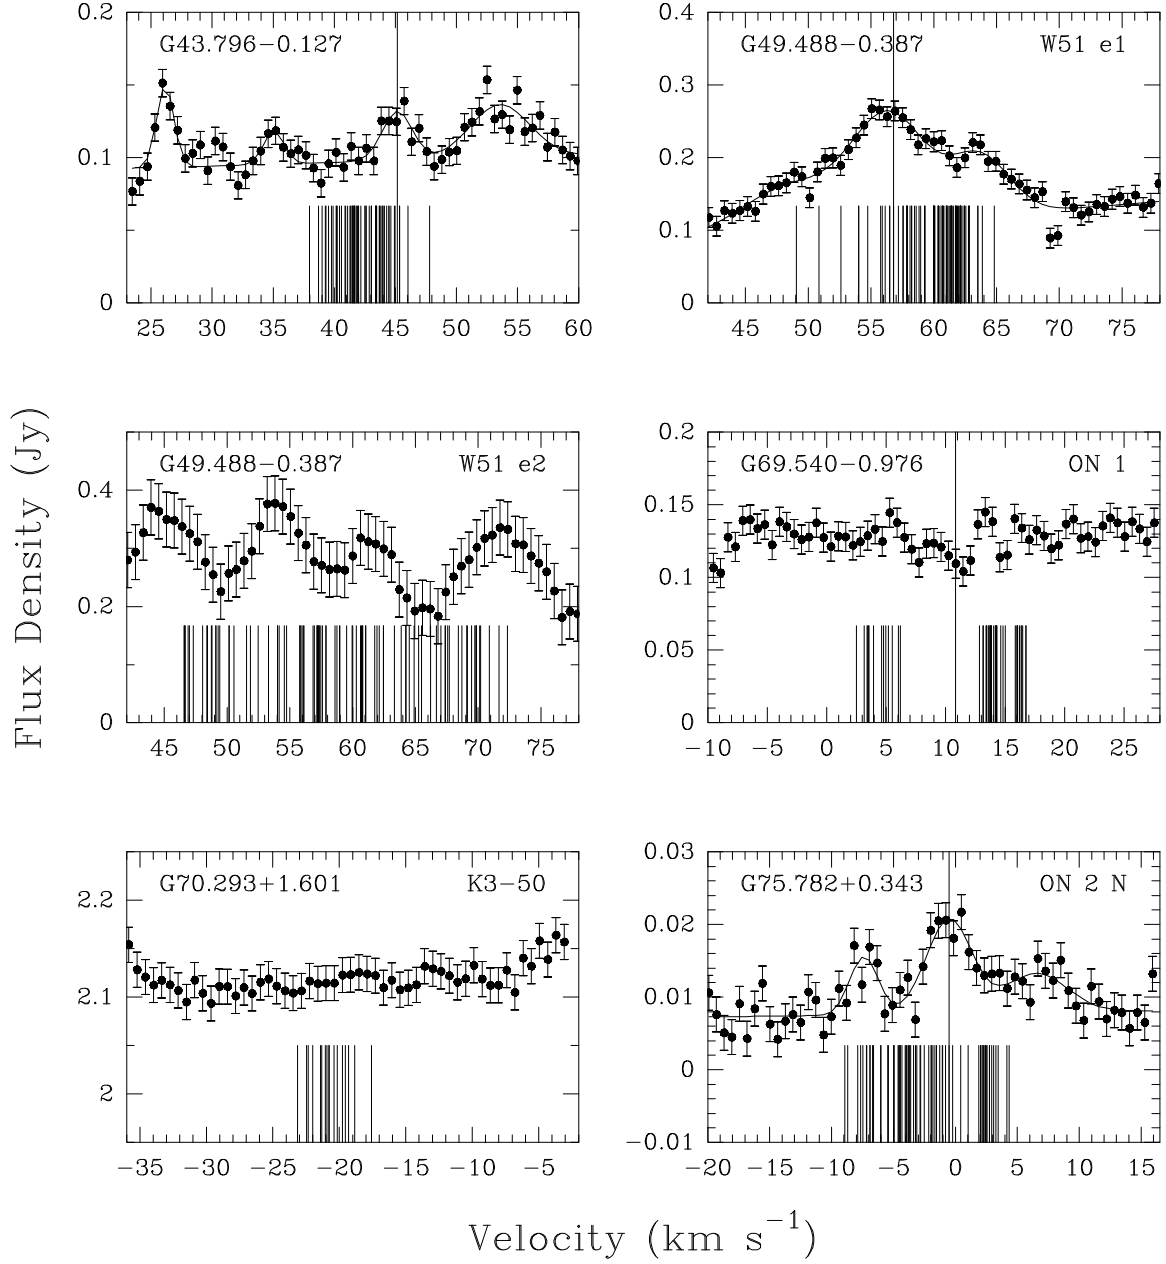


Fig. 41.— Spectra of (1,1) transition of NH_3 for six sources. See Figure 40 for details. Ammonia emission at 10.8 km s^{-1} is seen in a large region $5''$ to $30''$ north of ON1.

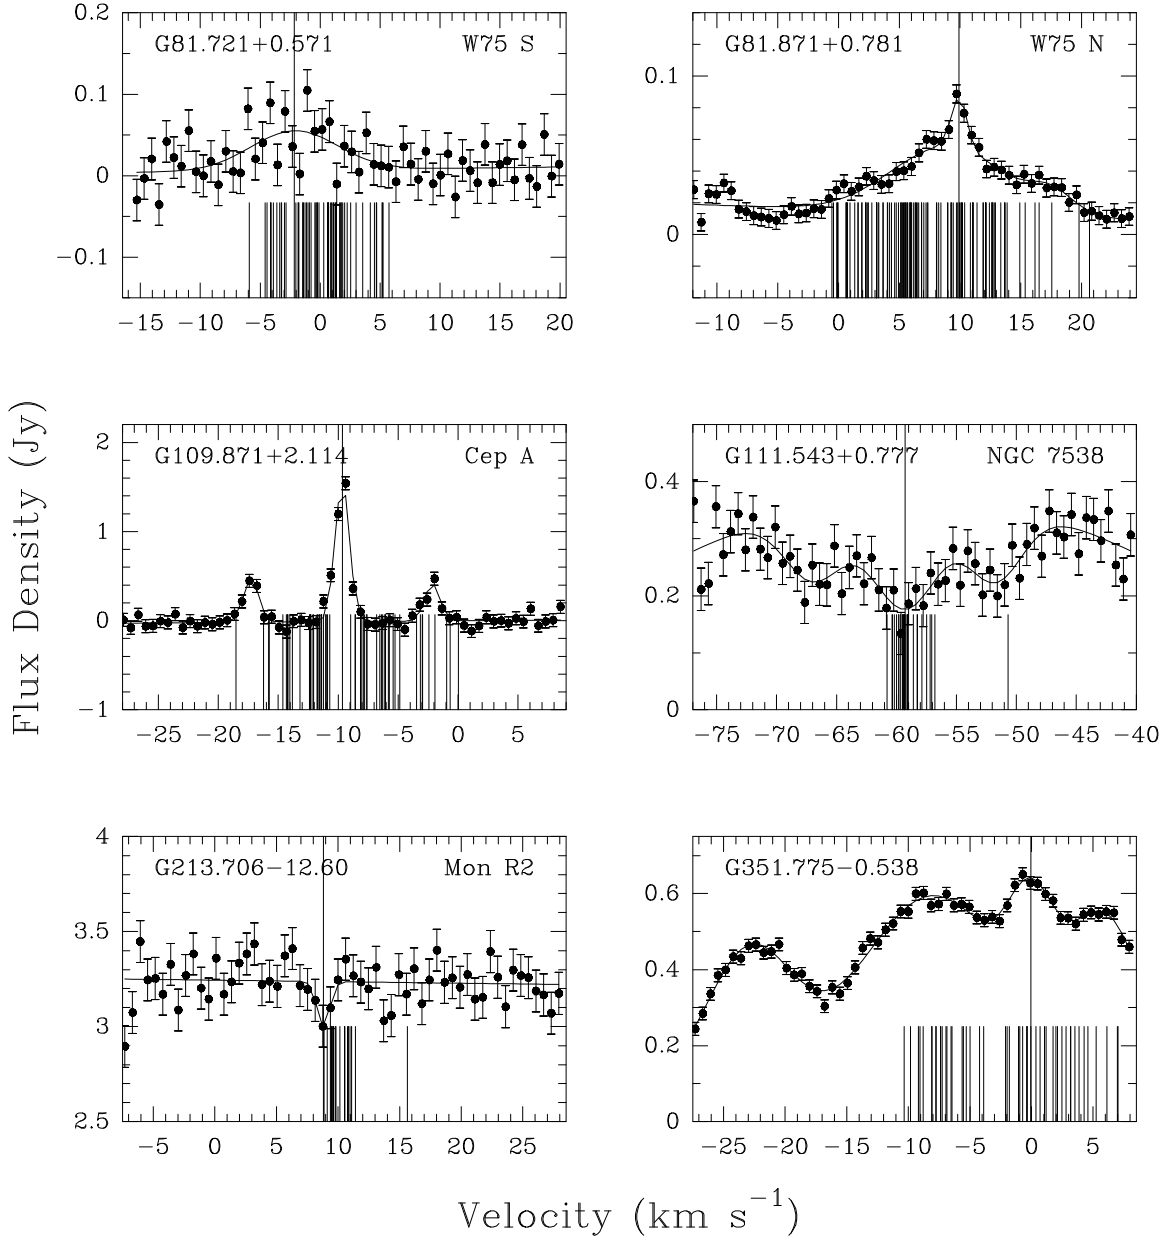


Fig. 42.— Spectra of (1,1) transition of NH_3 for six sources. See Figure 40 for details.

A. Full-Polarization Spectral-Line VLBI Reduction Techniques

The following procedure was used to reduce our full-polarization, spectral-line, VLBA data. Names of AIPS tasks and runfiles corresponding to each step are given in parentheses. Note that simplified interfaces to some of these tasks are available as a series of AIPS runfiles.²

The full data set is loaded (FITLD), discarding data with low weights. Here and throughout the procedure, any obviously bad data are flagged (UVFLG). It is necessary to correct for digital sampler bias by the VLBA correlator (ACCOR). *A priori* amplitude calibration is applied (APCAL) using the gain curve and system temperature tables provided with the data set. Since VLBA antennas have altitude-azimuth mounts, the parallactic angle of a polarized source will change with time due to the relative geometry between the source and antenna. It is necessary to remove these effects (CLCOR, OPCODE='PANG') for full-polarization observations.

Instrumental phases and single-band delays are removed by fringe fitting (FRING) on a good scan of a strong calibrator. Fringe fitting is computationally intensive and requires significant amounts of computer memory, so it may be advisable to average several spectral channels together (AVSPC). Fringe rates should be zeroed (SNCOR, OPCODE='ZRAT') before being applied to the spectral line source, since the rates determined from the calibrator may worsen phase coherence. For full-polarization observations, it is also necessary to determine the delay difference between RCP and LCP data (CRSFRING).

The amplitude bandpass response should be obtained from a strong calibrator source using autocorrelation data (BPASS). The bandpass should be examined (BPLLOT) to ensure that bad data and interference have not corrupted the output. If multiple calibrator scans are used to solve for the bandpass response, the bandpass can be interpolated in time to correct for small, time-varying instrumental effects.

²AIPS Memo 105 (Ulvestad, Greisen, & Mioduszewski 2001) is available at: <ftp://ftp.aoc.nrao.edu/pub/software/aips/TEXT/PUBL/AIPSMEM105.PS> .

For high-precision polarimetry it is necessary to determine the instrumental calibration. The feed D-terms add vectorially to the source polarization in the Stokes (Q, iU) -plane. Since the parallactic angle calibration has already been applied, the source polarization is constant, but the instrumental polarization varies with time. Thus, it is possible to solve for this polarization if an unpolarized source has been observed over a wide range of parallactic angles. The data from a strong, unpolarized calibrator should be self-calibrated (**CALIB**, **IMAGR**) before solving for the D-terms (**LPCAL**). Instrumental polarization terms at the VLBA are typically on the order of a few percent.

Next, the phase difference between RCP and LCP must be calculated, since this corresponds to a rotation of the polarization position angle. A strong calibrator with known polarization characteristics should have been observed. The data for this source should be self-calibrated and imaged in Stokes Q and U, and the resulting polarization vectors should be compared against the known polarization. For 3C286 in AIPS, the applicable polarization angle correction is $66^\circ - \arctan(U, Q)$, where a two-argument arctangent function is used.

Spectral lines drift back and forth in frequency as their Doppler-shifted velocity changes with time over the course of observations due to the rotation of the Earth around the Sun. In AIPS, these effects can be removed by setting the LSR velocity and rest frequencies of the observations (**SETJY**) and then running **CVEL**.

The maser sources can be self-calibrated using a bright maser spot as the reference feature. The resulting calibration can be applied to all spectral channels in both polarizations. Experience has shown that this calibration can be applied to the other main-line, ground-state OH transition as well if both are observed simultaneously. While the absolute position of maser spots cannot be obtained using self-calibrated data, the relative positions of all spots in both polarizations in both transitions will be correct. After self-calibration, the previously obtained RCP – LCP phase difference should be applied (**CLCOR**, **OPCODE='POLR'**) before final imaging.

REFERENCES

- Araya, E., Hofner, P., Churchwell, E., & Kurtz, S. 2002, *ApJS*, 138, 63
- Argon, A. L., Reid, M. J., & Menten, K. M. 2000, *ApJS*, 129, 159
- Argon, A. L., Reid, M. J., & Menten, K. M. 2002, in *IAU Symposium 206, Cosmic MASERs: From Protostars to Blackholes*, ed. V. Migenes and M. J. Reid (San Francisco: ASP), 367
- Baudry, A., & Diamond, P. J. 1998, *A&A*, 331, 697
- Baudry, A., Diamond, P. J., Booth, R. S., Graham, D., & Walmsley, C. M. 1988, *A&A*, 201, 105
- Blaauw, A., Hiltner, W. A., & Johnson, H. L. 1959, *ApJ*, 130, 69
- Bloemhof, E. E., Reid, M. J., & Moran, J. M. 1992, *ApJ*, 397, 500
- Caswell, J. L. 1997, *MNRAS*, 289, 203
- Crampton, D., Georgelin, Y. M., & Georgelin, Y. P. 1978, *A&A*, 66, 1
- Desmurs, J. F., Baudry, A., Wilson, T. L., Cohen, R. J., & Tofani, G. 1998, *A&A*, 334, 1085
- Dickel, J. R., Dickel, H. R., & Wilson, W. J. 1978, *ApJ*, 223, 840
- Fish, V. L., Reid, M. J., Argon, A. L., & Menten, K. M. 2002, in *IAU Symposium 206, Cosmic MASERs: From Protostars to Blackholes*, ed. V. Migenes and M. J. Reid (San Francisco: ASP), 371
- Fish, V. L., Reid, M. J., Wilner, D. J., & Churchwell, E. 2003, *ApJ*, 587, 701
- Fouquet, J. E., & Reid, M. J. 1982, *AJ*, 87, 4
- García-Barreto, J. A., Burke, B. F., Reid, M. J., Moran, J. M., Haschick, A. D., & Schilizzi, R. T. 1988, *ApJ*, 326, 954
- Genzel, R. et al. 1981, *ApJ*, 247, 1039
- Gray, M. D., Cohen, R. J., Richards, A. M. S., Yates, J. A., & Field, D. 2001, *MNRAS*, 324, 643
- Güsten, R., Fiebig, D., & Uchida, K. I. 1994, *A&A*, 286, L51
- Harris, S. 1975, *MNRAS*, 170, 139
- Harvey-Smith, L., & Cohen, R. J. 2005, *MNRAS*, 356, 637
- Hofner, P., Kurtz, S., Churchwell, E., Walmsley, C. M., & Cesaroni, R. 1994, *ApJ*, 429, L85
- Hughes, V. A., & MacLeod, G. C. 1993, *AJ*, 105, 1495

- Lo, K. Y., Walker, R. C., Burke, B. F., Moran, J. M., Johnston, K. J., & Ewing, M. S. 1975, *ApJ*, 202, 650
- Moffat, A. F. J., Fitzgerald, M. P., & Jackson, P. D. 1979, *A&AS*, 38, 197
- Moran, J. M., Reid, M. J., Lada, C. J., Yen, J. L., Johnston, K. J., & Spencer, J. H. 1978, *ApJ*, 224, L67
- Norris, R. P., & Booth, R. S. 1981, *MNRAS*, 195, 213
- Palmer, P., Goss, W. M., & Devine, K. E. 2003, *ApJ*, 599, 324
- Reid, M. J., Haschick, A. D., Burke, B. F., Moran, J. M., Johnston, K. J., & Swenson, G. W., Jr. 1980, *ApJ*, 239, 89
- Reifenstein, E. C., Wilson, T. L., Burke, B. F., Mezger, P. G., & Altenhoff, W. J. 1970, *A&A*, 4, 357
- Slysh, V. I., Migenes, V., Val’tts, I. E., Lyubchenko, S. Yu., Horiuchi, S., Altunin, V. I., Fomalont, E. B., & Inoue, M. 2002, *ApJ*, 564, 317
- Ulvestad, J., Greisen, E. W., & Mioduszewski, A. 2001, *AIPS Memo* 105
- Watson, C., Araya, E., Sewilo, M., Churchwell, E., Hofner, P., & Kurtz, S. 2003, *ApJ*, 587, 714
- Wink, J. E., Altenhoff, W. J., & Mezger, P. G. 1982, *A&A*, 108, 227
- Wright, M. M., Gray, M. D., & Diamond, P. J. 2004a, *MNRAS*, 350, 1253
- Wright, M. M., Gray, M. D., & Diamond, P. J. 2004b, *MNRAS*, 350, 1272
- Zheng, X., Reid, M. J., & Moran, J. M. 2000, *A&A*, 357, L37